



**LAND  
REGISTRY  
SERVICES**

## **NSW LandXML Recipe**

Specifications for preparation of Deposited Plans and Strata Plans in LandXML format for lodgment at NSW Land Registry Services

<b>Document information</b>	
Title	<i>NSW LandXML Recipe</i>
Author	<i>Mark Deal, Hwan Choi</i>
Version	<i><b>DRAFT</b> v9.0</i>
Date issued	<i>May 2018</i>

## Amendment History

Version	Date	Author	Comments
4.0	15-10-2010	Mark Deal	Complete rewrite of NSW Recipe to align with ICSM ePlan Protocol LandXML Mapping .doc
4.01	3-11-2010	Mark Deal Feedback from: Mike Elfick and Landmark	<ul style="list-style-type: none"> <li>• Removed Author element</li> <li>• Removed Amendment and AmendmentItem elements</li> <li>• Removed PlanFeatures and PlanFeature elements</li> <li>• Removed IrregularLine element</li> <li>• Removed PntList2D element</li> <li>• Removed PntList3D element</li> <li>• Removed PurposeOfSurvey element</li> <li>• Removed Personnel element</li> <li>• Removed SurveyHeader@surveyorReference attribute</li> <li>• Changed description column for CgPoint@state attribute</li> <li>• Changed description column for Parcel@state attribute</li> <li>• Changed ReducedObservation@azimuth attribute to "R" (required)</li> <li>• Changed wording of description for the following attributes:: <ul style="list-style-type: none"> <li>○ ReducedObservation@distanceType</li> <li>○ ReducedObservation@azimuthType</li> <li>○ ReducedArcObservation@arcType</li> <li>○ ReducedObservation@adoptedDistanceSurvey</li> <li>○ ReducedArcObservation@adoptedSurvey</li> </ul> </li> <li>• Included easements in Parcel@name and Parcel@desc descriptions.</li> <li>• Added new Section 4 Complex Scenario Descriptions. Including Section 4.1 multipart lots</li> <li>• Changed Parcel@pclRef description</li> </ul>
4.02	15-11-2010	Mark Deal (ICSM WG)	<ul style="list-style-type: none"> <li>• Change to use of ReducedObservation@desc and ReducedArcObservation@desc attribute</li> </ul>
4.03	16-11-2010	Mark Deal Landmark	<ul style="list-style-type: none"> <li>• Removed following attributes <ul style="list-style-type: none"> <li>○ LandXML@xmlns:xsi</li> <li>○ LandXML@xsi:schemaLocation</li> </ul> </li> <li>• Added ReducedObservation@distanceAdoptionFactor</li> <li>• Changed wording of description of Parcel@state</li> <li>• Sample LXML for part lots (sec 4.1) Parcel@state changed to "proposed"</li> <li>• Added Section 1.2 – References</li> </ul>

Version	Date	Author	Comments
4.04	December 2010	Mark Deal	<ul style="list-style-type: none"> <li>• Added attributes Line@note and Curve@note</li> <li>• Amended description of <ul style="list-style-type: none"> <li>○ ReducedObservation@azimuth</li> <li>○ ReducedObservation@azimuthType</li> <li>○ ReducedArcObservation@arcType</li> <li>○ ObservationGroup@id</li> <li>○ InstrumentSetup@id</li> </ul> </li> <li>• Added new links in Section 1.2 – References</li> <li>• Added attributes <ul style="list-style-type: none"> <li>○ LandXML@xmlns:xsi</li> <li>○ LandXML@xsi:schemaLocation</li> </ul> </li> <li>• Changed attribute LandXML@xmlns:xsi from CR to R (Required)</li> </ul>
4.04.01	January 2011	Mark Deal	<ul style="list-style-type: none"> <li>• Changed to Note 2d on page 8 and description of Parcel@parcelType</li> <li>• SurveyHeader@jurisdiction value changed from NSW to New South Wales</li> <li>• DocFileRef@location amended file name in location address</li> </ul>
4.04.02	February 2011	Mark Deal	<ul style="list-style-type: none"> <li>• A number of elements and attributes that were previously omitted from the NSW recipe have now been included to accommodate some administrative data. The following is a list of the additional Elements@attributes that have been added: <ul style="list-style-type: none"> <li>○ PurposeOfSurvey</li> <li>○ AdministrativeDate</li> <li>○ Personnel</li> <li>○ SurveyHeader@surveyorFirm</li> <li>○ SurveyHeader@surveyorReference</li> <li>○ Amended Child Element references in SurveyHeader</li> <li>○ Amended element tree diagram</li> <li>○ Added information in Section1.5</li> </ul> </li> <li>• Amended example LXML for Centre, Curve, Start and End elements</li> <li>• Changed to Note 2d on page 8 all NSW enumeration now capital</li> <li>• Changed cardinality of ReducedObservation to 1-*</li> <li>• Changed element tree diagram to show ReducedObservation as required</li> <li>• Added FieldNote element and changed element tree diagram</li> <li>• Added ReducedObservation@coordGeomRefs and ReducedArcObservation@coordGeomRefs</li> <li>• Added Note 2g page 8</li> </ul>
5.0	March 2011	ICSM ePlan WG	<ul style="list-style-type: none"> <li>• CgPoint@pntSurv value for parcel and curve centre now "sideshot" for both</li> </ul>
6.0	September 2011	Mark Deal	<ul style="list-style-type: none"> <li>• Removed 'AdminArea' from description of Parcel@parcelType</li> <li>• Amended example LXML for multipart lots section 4.1</li> <li>• Amended Administrative Date element to describe use for date of survey. "office use only" classification has been removed for this element.</li> </ul>

			<ul style="list-style-type: none"> <li>CoordinateSystem@datum attribute changed to "R" (required)</li> <li>Reinstated IrregularLine element</li> <li>Reinstated PntList2D element</li> <li>Reinstated PntList3D element</li> <li>Reinstated PlanFeatures and PlanFeature elements</li> <li>Changed Personnel@attributes to "optional"</li> <li>SurveyHeader@desc changed to "required"</li> <li>Amended description of Monument@desc</li> <li>CoordGeom@name changed to "optional"</li> <li>Added AdministrativeArea Element as optional element</li> <li>Added LocationAddress and its Child Elements as optional for future use</li> </ul>
6.01	October 2011	Mark Deal	<ul style="list-style-type: none"> <li>Added to complex scenarios.</li> <li>Changed CgPoint@desc to R</li> </ul>
6.02	November 2011	Mark Deal	<ul style="list-style-type: none"> <li>Changed CgPoint@desc to CR</li> <li>Changed cardinality for AdministrativeDate under SurveyHeader to 1-*. This is to mandate the date of survey.</li> <li>Changed Parcel@name description</li> </ul>
6.03	Dec 2011	Mark Deal	<ul style="list-style-type: none"> <li>Added additional LXML enumeration (i.e. "traverse") to the subset used in NSW for CgPoint@pntSurv</li> <li>Changed cardinality for FieldNote element</li> <li>Completed complex scenarios for Control Mark used as RM and boundary corner not marked.</li> </ul>
6.04	Feb 2012	Mark Deal	<ul style="list-style-type: none"> <li>Added complex scenario for recording "plans used"</li> <li>Updated reference files addresses from LPMA to LPI</li> <li>Updated description of CgPoint@pntSurv for "sideshot"</li> <li>Added irregular lines and occupations to complex scenarios section</li> <li>Changed personnel element to mandatory</li> <li>Changed SurveyHeader@surveyorReference to required</li> </ul>
6.05	April 2012	Mark Deal	<ul style="list-style-type: none"> <li>Added occupations and irregular line definition to complex scenarios</li> </ul>
6.06	May 2012	Mark Deal	<ul style="list-style-type: none"> <li>Added to complex scenarios <ul style="list-style-type: none"> <li>easements over track in use</li> <li>easement defined by centreline traverse</li> <li>Admin area boundaries</li> </ul> </li> </ul>
6.07	June 2012	Mark Deal	<ul style="list-style-type: none"> <li>Added to complex scenarios for occupations</li> <li>Changed monumentType to CR</li> </ul>
6.08	July 2012	MD	<ul style="list-style-type: none"> <li>Added Subdivision Number to complex scenarios</li> <li>Change to SurveyHeader@name description</li> </ul>
6.09	Nov 2012	MD	<ul style="list-style-type: none"> <li>"desc" attribute info added to Line element and complex scenarios "Occupations" section</li> <li>Added details of User defined diagrams for rendering- complex scenario section</li> </ul>
6.10	Feb 2013	MD	<ul style="list-style-type: none"> <li>Added CoordGeom@desc</li> <li>Added more info on user defined diagrams</li> </ul>

6.11	Mar 2013 Apr 2013  May 2013	MD MD  MD	<ul style="list-style-type: none"> <li>Amended definition for transmission line easements Sec 4.12</li> <li>Re write of Irregular line section</li> <li>Changed ReducedObservation@azimuth to CR</li> <li>Added adminArea@adminAreaType "Terrain" to record terrain info</li> <li>name &amp; note attributes removed from Line ,Curve and IrregularLine elements</li> </ul>
7.0	July 2013	MD	<ul style="list-style-type: none"> <li>Added scenario for Boundary Mark found – RM gone on same corner</li> <li>Minor rewording to Introduction, Sections 1.4 and 1.5</li> <li>Updated web numerous address hyperlinks</li> </ul>
7.1	4 Sept2013	MD & Hwan Choi (HC)	<ul style="list-style-type: none"> <li>Reinstated Amendment and AmendmentItem elements</li> <li>Fixed typos</li> <li>Customised numerous element /attribute descriptions to NSW specific</li> </ul>
7.2	12 Sep 2013	MD	<ul style="list-style-type: none"> <li>Added appendix A</li> <li>Edit re Occupation use of Monument@state</li> </ul>
7.3	22 Oct 2013	MD	<ul style="list-style-type: none"> <li>Added info on direction of flow arrow for water courses Sec 4.17</li> <li>Edited AnnotationType list in appendix A</li> </ul>
7.4	20 Nov 2013	MD	<ul style="list-style-type: none"> <li>Edited Plan Feature@name description and Occupations scenarios to accommodate walls, buildings ,fences ,Kerbs and offsets from Kerbs and other plan feature types</li> </ul>
7.5	31 Mar 2014	MD	Changed horzOrderType list in Appendix A
7.5.1	30 Jun 2014	MD	Edited section 4.13 transmission line easement definition
7.5.2	Oct 2014	MD	Added Parcel@class = "Reserved Road" and Section 4.18 Defining Reserved Roads
7.5.3	April 2015	MD	Amended description of how to define extremity boundary of easement for transmission line sec 4.13
8.0	Nov 2014	HC	<ul style="list-style-type: none"> <li>Added "Reference" in the NSW enumerated list for purposeType</li> <li>Added Annotation@type = "Combined Scale Factor"</li> </ul>
	Mar 2015	HC	<ul style="list-style-type: none"> <li>Added "Unspecified" in the NSW enumerated list for monumentState</li> <li>Added 4.19 Defining Reference Mark (RM) and modified 4.6 Control marks used as reference marks</li> <li>Added ReducedObservation@distanceAccClass and changed its type from enum:horzClassType to enum:distanceAccType</li> <li>Removed ReducedObservation@adoptedAzimuthSurvey attribute</li> </ul>
	Nov 2015	HC	<ul style="list-style-type: none"> <li>Added Annotation@type = "LPI File Ref"</li> <li>Updated all the examples used</li> <li>Major review and updates on the Complex Scenario sections</li> <li>Added "Designated Area" in the NSW enumerated list for parcelClass</li> </ul>
	Dec 2015	HC	<ul style="list-style-type: none"> <li>Added 4.20 Defining the area 'Benefited to the Part' using Designated Area</li> <li>Added "BM" in the NSW enumerated list for monumentType</li> <li>Removed "Unspecified" in the NSW enumerated list for monumentState</li> </ul>

	Feb 2016	HC	<ul style="list-style-type: none"> <li>Added "Staged Strata Plan" and "Staged Strata Plan Of Subdivision" in the NSW enumerated list for PurposeOfSurvey@name</li> </ul>
	Mar 2016	HC	<ul style="list-style-type: none"> <li>Changed requirement of PlanFeature@desc from required to conditionally required and updated Section 4.13</li> <li>Changed the NSW enumerated list for adminDateType and updated Section 3.33 AdministrativeDate <ul style="list-style-type: none"> <li>Removed "Lodgment Date", "Registration Date" and "Image Date"</li> <li>Added "Date Of Compilation"</li> </ul> </li> <li>Changed the Cardinality of ReducedObservation element from 1 - * to 0 - *</li> </ul>
	Apr 2016	HC	<ul style="list-style-type: none"> <li>Updated section 4.10.1 under 'Traverse': Changed ReducedObservation@desc="Boundary" to "Connection"</li> <li>Added 4.20 Defining the Line PEG</li> <li>NSW enumerated list for monumentState and distanceAccType have been modified</li> <li>Section 4.19 have been modified to include all Reference Marks</li> </ul>
	May 2016	HC	<ul style="list-style-type: none"> <li>Added "Boardwalk" and "Passage" in the NSW enumerated list for RoadName@ roadNameType to support the latest Rural and Urban addressing standard, AS/NZS 4819:2011</li> </ul>
8.0.1	June 2016	HC	<ul style="list-style-type: none"> <li>Amended section 4.11.1 Occupations</li> <li>Changed requirement of PlanFeature@desc back to required and updated Section 4.13</li> <li>Reinstated "natural boundary" as a valid enumeration for CgPoint@pntSurv and updated Section 4.10.1</li> </ul>
8.0.2	Feb 2017	MD/HC	<ul style="list-style-type: none"> <li>Change to description of ReducedObservation and ReducedArcObservation@desc</li> </ul>
	Mar 2017	HC	<ul style="list-style-type: none"> <li>added "LPICalculated" to observationType for distanceType, azimuthType and arcType attributes in ReducedObservation and ReducedArcObservation</li> </ul>
	July 2017	MD	<ul style="list-style-type: none"> <li>Changed naming convention for Hydrographic Parcels see Section 3.14 and 4.10.3</li> <li>Removed "GPS" and replaced with "Policy 3" horzFixType enumeration list</li> </ul>
9.0		MD/HC	<ul style="list-style-type: none"> <li>Changed Annotation@type = "LPI File Ref" to "LRS File Ref" and observationType of "LPICalculated" to "LRSCalculated"</li> <li>Updated the hyperlinks from LPI to LRS</li> <li>Edited 4.14 parcel definition for New and existing easements</li> <li>Changed section 4.11.1 Occupations, for occupation offset state from "Existing" to "Found"</li> <li>Edited 4.14 parcel definition for New and existing easements</li> <li>Added Author@createdBy Element@attribute to record source of the file ( Section 3.7)</li> <li>3.21 CoordGeom@name changed from optional to required</li> <li>Added new ReducedObservation/ReducedArcObservation@desc enumeration="Road Extent" (Section 3.40,3.41 and Appendix A3 and Section 4.23)</li> <li>Added 3 additional AdminDate Types - Appendix A3</li> <li>Edited Monument@condition attribute to only apply to Control</li> </ul>

			<p>Marks. Section 3.13 and Appendix A3 – and updated enumeration list</p> <ul style="list-style-type: none"> <li>• Updated reference data and schema address in section 1.2 and 3.9</li> <li>• Changes for S&amp;SI Reg 2017 <ul style="list-style-type: none"> <li>• Edit description Sec 3.42 re: established mark &gt;= Class D</li> <li>• Added “Not Marked Obstructed” to Monument@state - Appendix A3 and Section 4.22</li> <li>• Added additional enumerations for Monument@type in Appendix A3</li> <li>• Added 4.24 for Height Difference Schedule data requirements ( CI 69 SSI Reg 2017) and ReducedObservation attributes to Secs 3.40 <ul style="list-style-type: none"> <li>○ @vertDistance (Height Difference)</li> <li>○ @MSLDistance (Method)</li> </ul> </li> <li>• Added 4.24 for Height Schedule data requirements ( CI 71 SSI Reg 2017) and RedVerticalObservation attributes to Secs 3.43 <ul style="list-style-type: none"> <li>○ @verticalFix (Height Datum Validation)</li> <li>○ @date (AHD SCIMS date)</li> </ul> </li> <li>• Added 4.25 – GNSS Schedule data requirements</li> <li>• Changed ReducedObservation@distanceType/azimuthType enumerations - Appendix A3</li> </ul> </li> <li>• Added SP elements <ul style="list-style-type: none"> <li>• CgPoint@code (Section 3.11)</li> <li>• Parcel@buildingNo (Section 3.15)</li> <li>• Parcel@buildingLevelNo (Section 3.15)</li> <li>• Parcel@state=”affected” (Section 3.15 Appendix A2)</li> <li>• Line@note, Curve@note , IrregularLine@note (Section 3.22,3.23,3.24)</li> <li>• ReducedObservation@azimuth are optional for strata boundaries (Section 3.40)</li> <li>• Annotation@type=”Scale” (Section 3.37 Appendix A3)</li> <li>• New Section 5 mapping SP elements to LXML</li> </ul> </li> </ul>
--	--	--	---

## Table of Contents

Table of Contents .....	8
<b>1. INTRODUCTION.....</b>	<b>10</b>
1.1 Purpose .....	10
1.2 References.....	11
1.3 How the data will be used .....	11
1.4 Exception.....	11
1.5 Using this document.....	12
<b>2. FILE DEFINITION – ELEMENT TREE.....</b>	<b>15</b>
<b>3. ELEMENTS AND ATTRIBUTES .....</b>	<b>17</b>
3.1 XML Prolog.....	17
3.2 LandXML.....	17
3.3 Units .....	18
3.4 Metric.....	18
3.5 CoordinateSystem.....	19
3.6 Application.....	19
3.7 Author .....	20
3.8 FeatureDictionary .....	20
3.9 DocFileRef.....	21
3.10 CgPoints .....	21
3.11 CgPoint.....	22
3.12 Monuments .....	23
3.13 Monument.....	23
3.14 Parcels.....	24
3.15 Parcel .....	25
3.16 LocationAddress.....	27
3.17 ComplexName .....	28
3.18 RoadName .....	28
3.19 AddressPoint .....	29
3.20 Center .....	29
3.21 CoordGeom .....	30
3.22 Line .....	31
3.23 Curve .....	31
3.24 IrregularLine .....	32
3.25 Start .....	33
3.26 End .....	33
3.27 PntList2D .....	34
3.28 PntList3D .....	34
3.29 PlanFeatures .....	35
3.30 PlanFeature .....	35
3.31 Survey .....	36
3.32 SurveyHeader.....	36
3.33 AdministrativeArea .....	37
3.34 AdministrativeDate .....	38
3.35 PurposeOfSurvey .....	39
3.36 Personnel .....	39
3.37 Annotation .....	40
3.38 FieldNote .....	42
3.39 ObservationGroup .....	43
3.40 ReducedObservation.....	43
3.41 ReducedArcObservation .....	45
3.42 RedHorizontalPosition .....	47
3.43 RedVerticalObservation .....	48
3.44 InstrumentSetup .....	49
3.45 InstrumentPoint .....	50
3.46 Amendment .....	50
3.47 AmendmentItem .....	51



<b>4.</b>	<b>COMPLEX SCENARIO DESCRIPTIONS.....</b>	<b>52</b>
4.1	Multipart Lots.....	52
4.2	Subdivision Number .....	53
4.3	Plan Note.....	53
4.4	Parcel Note.....	53
4.5	Line Note.....	54
4.6	Control marks used as reference marks .....	54
4.7	“Not Marked” boundary corners .....	55
4.8	RM gone.....	55
4.8.1	with boundary mark .....	55
4.8.2	without boundary mark .....	55
4.9	Plans Used.....	56
4.10	Irregular Lines.....	56
4.10.1	Surveyed plans.....	56
4.10.2	Compiled plans.....	58
4.10.3	Defining Adjoining Hydrographic Parcels.....	58
4.11	PlanFeatures .....	59
4.11.1	Occupations .....	59
4.11.2	Other Types of Plan Features .....	63
4.12	Easements over track in use or line of pipes (Approx. position) .....	64
4.13	Transmission line easements defined by centre line traverse .....	65
4.14	Definition of easement segments .....	67
4.16	Defining diagrams (enlargements) in NSW LXML .....	69
4.17	Adding Direction of Flow arrow in water course.....	70
4.18	Defining Reserved Roads .....	70
4.19	Defining Reference Mark (RM) – Not yet implemented .....	72
4.19.1	RM(s) referencing single corner.....	72
4.19.2	When one mark references multiple corners .....	75
4.20	Defining the area ‘Benefited to the Part’ using Designated Area .....	76
4.21	Defining the Line PEG .....	78
4.22	Defining Obstructed Boundary Corner .....	79
4.23	New road parcels abutting existing or other new road parcels .....	79
4.24	Height Schedule and Height Difference Schedule .....	80
4.25	GNSS Schedule .....	81
<b>5</b>	<b>STRATA PLAN SPECIFIC SCENARIOS.....</b>	<b>82</b>
5.01	Structural Requirements .....	82
5.01.1	Lot boundary definition Structural and Non Structural .....	82
5.01.2	Separating Levels.....	85
5.02	Location Plan .....	85
5.02	Floor Plans .....	88
5.03	Cubic Space Floor Plan .....	92
<b>APPENDIX A –</b>	<b>ENUMERATION LISTS .....</b>	<b>93</b>
A1.	Primitive Data Types.....	93
A2.	LandXML Enumerated Types .....	93
A3.	NSW Enumerated Types .....	95

# 1. INTRODUCTION

NSW Land Registry Services (NSW LRS) is developing a digital plan processing system that includes the preparation and lodgment of land title plans in LandXML (LXML) format. LXML has been ratified by the Intergovernmental Committee on Surveying and Mapping (ICSM) as the national standard for digital lodgment of land title plans.

The ICSM has published a document titled “*ePlan Protocol LandXML Mapping*” which fully defines every element within the national LXML schema. However not every jurisdiction will use all of the elements within the schema. In the initial implementation of digital plan lodgment in NSW, digital plans lodged in NSW LRS will only include the survey component of the plan that is currently represented on the plan drawing sheet together with a subset of the information contained on the Administration Sheet. All of the administrative information (including the subset in the LXML), certification and signatures will continue to be contained in an Administration Sheet in TIFF format which must be lodged in conjunction with the LandXML file.

During the first stages of implementation, a TIFF file of the plan drawing sheet will also be lodged to support the LXML. This will be the case until NSW LRS can satisfactorily produce a formal rendering of the LXML file onto the appropriate plan form, through an online rendering service being developed and enhanced for surveyors in the ePlan lodgment portal within SIX. Once the rendering service is in full production, the lodging surveyor will no longer need to prepare a TIFF of the plan drawing sheet. The rendering service will also be available for surveyors to render their plans for use with councils, clients etc. prior to lodgment. The version rendered by NSW LRS at lodgment will then form the legal representation of the plan.

This document specifies the elements that are required to be in the LXML file for a plan submission to NSW LRS as part of the ePlan process. It is a subset of the ICSM LXML specification.

For information on NSW LRS ePlan please refer to:

[http://www.lpi.nsw.gov.au/plan\\_and\\_title\\_registration/landxml](http://www.lpi.nsw.gov.au/plan_and_title_registration/landxml)

## 1.1 Purpose

This document specifies the requirements for the construction of a digital plan for lodgment with NSW LRS. It is intended for use by survey software vendors and surveyors to assist them in the development of LXML functionality within their software and practices that complies with the NSW specifications and ICSM national standard LXML format.

## 1.2 References

Links to the following documents, schemas and reference data files are provided to assist in the creation of LXML plan files that are compliant with the National (ICSM) and NSW specifications.

REF1 LandXML 1.2 Schema <a href="http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd">http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd</a>
REF2 ICSM ePlan Protocol – LandXML Mapping <a href="http://www.icsm.gov.au/eplan/ePlan-Protocol-LandXML-Mapping-v2.1.4.pdf">http://www.icsm.gov.au/eplan/ePlan-Protocol-LandXML-Mapping-v2.1.4.pdf</a>
REF3 ICSM ePlan Protocol – LandXML Structural Requirements <a href="http://www.icsm.gov.au/eplan/ePlan-Protocol-LandXML-Structural-Requirements-v1.0.pdf">http://www.icsm.gov.au/eplan/ePlan-Protocol-LandXML-Structural-Requirements-v1.0.pdf</a>
REF4 ICSM ePlan Protocol – Schema Architecture <a href="http://www.icsm.gov.au/eplan/ePlan-Protocol-Schema-Architecture-v2.1.pdf">http://www.icsm.gov.au/eplan/ePlan-Protocol-Schema-Architecture-v2.1.pdf</a>
REF5 ICSM ePlan Protocol – Schema <a href="http://www.icsm.gov.au/eplan/schema/xml-gov-au-icsm-eplan-cif-protocol-2.0.xsd">http://www.icsm.gov.au/eplan/schema/xml-gov-au-icsm-eplan-cif-protocol-2.0.xsd</a>
REF6 NSW Enumerations List <a href="http://www.nswlrs.com.au/__data/assets/file/0011/146981/xml-gov-au-nsw-icsm-eplan-cif-enumerated-types-1.0.xsd">http://www.nswlrs.com.au/__data/assets/file/0011/146981/xml-gov-au-nsw-icsm-eplan-cif-enumerated-types-1.0.xsd</a>
REF7 NSW ePlan Protocol Schema <a href="http://www.nswlrs.com.au/__data/assets/file/0014/142007/xml-gov-au-nsw-icsm-eplan-cif-protocol-1.0.xsd">http://www.nswlrs.com.au/__data/assets/file/0014/142007/xml-gov-au-nsw-icsm-eplan-cif-protocol-1.0.xsd</a>
Ref 8 NSW reference data context <a href="http://www.nswlrs.com.au/__data/assets/xml_file/0010/137368/xml-gov-au-nsw-icsm-eplan-cif-referencedata-101013.xml">http://www.nswlrs.com.au/__data/assets/xml_file/0010/137368/xml-gov-au-nsw-icsm-eplan-cif-referencedata-101013.xml</a>

## 1.3 How the data will be used

The digital plan file known as a CIF (Cadastral Information File) which is in LXML format, will only contain data for a single deposited plan.

This file can be used in two situations:

1. Data interchange from a surveyor to NSW LRS as part of an ePlan lodgment of a new plan.
2. Data interchange when receiving existing digital plan data from NSW LRS.

## 1.4 Exception

During initial implementation stage of digital lodgment in NSW, occupations such as walls, fences etc. are not required to form part of the LXML file. Notwithstanding that, this document defines LXML definition for occupations in Section 4.11. Initially they will only be required to be displayed on the accompanying TIFF file of the plan drawing sheet.

When the NSW LRS rendering service, described in the Introduction Section of this document, is available and the TIFF of the plan drawing sheet is no longer required the occupation information must be included in the LXML file.

## 1.5 Using this document

### Section 1

This section contains background information on this document

### Section 2

This section provides a list of the XML elements that are used for plans being prepared for lodgement in NSW. The elements appear in the order that they appear in the LXML schema.

### Section 3

This section describes each element and its attributes in detail. Elements are presented in the order that they appear in the LXML schema, and each element's child and parent elements are provided along with an example of use.

In section 3, tables are used to assist formatting information. Most table sections are self-explanatory; however the following have special meaning:

#### Cardinality:

This specifies how many child elements of a particular type an element must have, e.g.:

- a. **0 - \*** means zero or more (i.e. the child is optional)
- b. **1** means exactly one (i.e. if the parent element is used, it must have this element as a child)
- c. **1 - \*** means at least one and possibly more

#### Type:

This specifies the data type of an attribute. The type can be an XML base type such as "string", or custom type that is defined in the schema. Types used by the Protocol are listed as follows:

- a. *Base* – a raw value type, e.g. "string".
- b. *LandXML Enumerations* – an enumerated type defined in the LXML Schema, e.g. "stateType".
- c. *Jurisdictional Enumerations* – an enumerated type defined by the NSW enumerations schema, e.g. "parcelClass". These are defined as skeleton types in the LXML schema that are extended by the jurisdictional enumerations.
- d. *Custom Jurisdictional Enumerations* – defined as a base type in LXML but with a custom enumeration type specified by a jurisdictional enumerations schema, e.g. "horzDatumType" - 'horizontalDatum' in LXML 1.2 is defined as *string* but in NSW jurisdictional schema, it is defined as a *horzDatumType*, which is the custom enumerated type specified by jurisdictional enumeration schemas. Only the enumerated values listed in the enumeration schemas can be used for these attributes.
- e. *Other Defined Types* – explicitly defined in as a type in LXML but the underlying type is a base type. These are not extended in the jurisdictional schemas. The underlying LXML base type is used.

For information on all the “type” definitions used by the ePlan Protocol, including LXML and NSW specific enumerated types, please refer to **Appendix A** in this document

#### Required:

This specifies whether an attribute is:

- a. Required (**R**): the attribute must be used when the element is used and must have a value that is not an empty string.

E.g. **Parcel** elements must have a **name** attribute.

- b. Conditionally Required (**CR**): the attribute must be used if some condition is met.

E.g. **CoordinateSystem** element must have a **desc**, if the plan is on MM orientation. The value will be the deposited plan to which the survey has been orientated

- c. Optional (**O**): the attribute may be used

E.g. **Amendment** elements have an optional **comments** attribute

**NB:** elements and attributes that are specified as optional in the national specification may be required in this NSW specification

#### Section 4

Complex scenarios section specifies LXML structural requirements that are to be used in the construction of a CIF where necessary to handle scenarios that require LXML to be structured in a certain way to correctly capture the data

#### All sections - XML examples

Throughout this document, XML examples use the following formatting:

```
<Parcel class="Road" ...>
  <CoordGeom>
    <Line>
      <Start pntRef="..." />
      <End pntRef="..." />
    </Line>
    <Line>
      ...
    </Line>
  </CoordGeom>
</Parcel>
```

#### Notes

1. Sections of code that are not important to the XML examples are replaced by an ellipsis (...)
2. The following conventions apply to element and attribute names and values:
  - a. Element names start with a capital letter
  - b. All attribute values defined by a LXML enumeration start with lower case letter.


- c. All attribute values defined in the NSW jurisdictional specific enumerations start with upper case letter.
  - d. Where the attribute is a “string” the case is not sensitive.
  - e. In LXML, names reflect the purpose of the element. Capitalisation is used to assist readability, e.g. **CoordinateSystem**.
  - f. All dates shown in the file must be in the format of yyyy-mm-dd (ISO 8601)
3. XPath notation is used to refer to elements in places.
    - Full reference to Parcel elements: **/LandXML/Parcels/Parcel**
    - Partial reference to Line elements: **//Parcel/Line**
  4. Where an attribute value says "set to..." the value in the CIF must be the stated value matching exactly.

DRAFT


## 2. FILE DEFINITION – ELEMENT TREE

A LXML file for use in the NSW ePlan process will contain the elements that are listed below in the order they appear in the LXML schema:

### LandXML Element Tree - Part 1

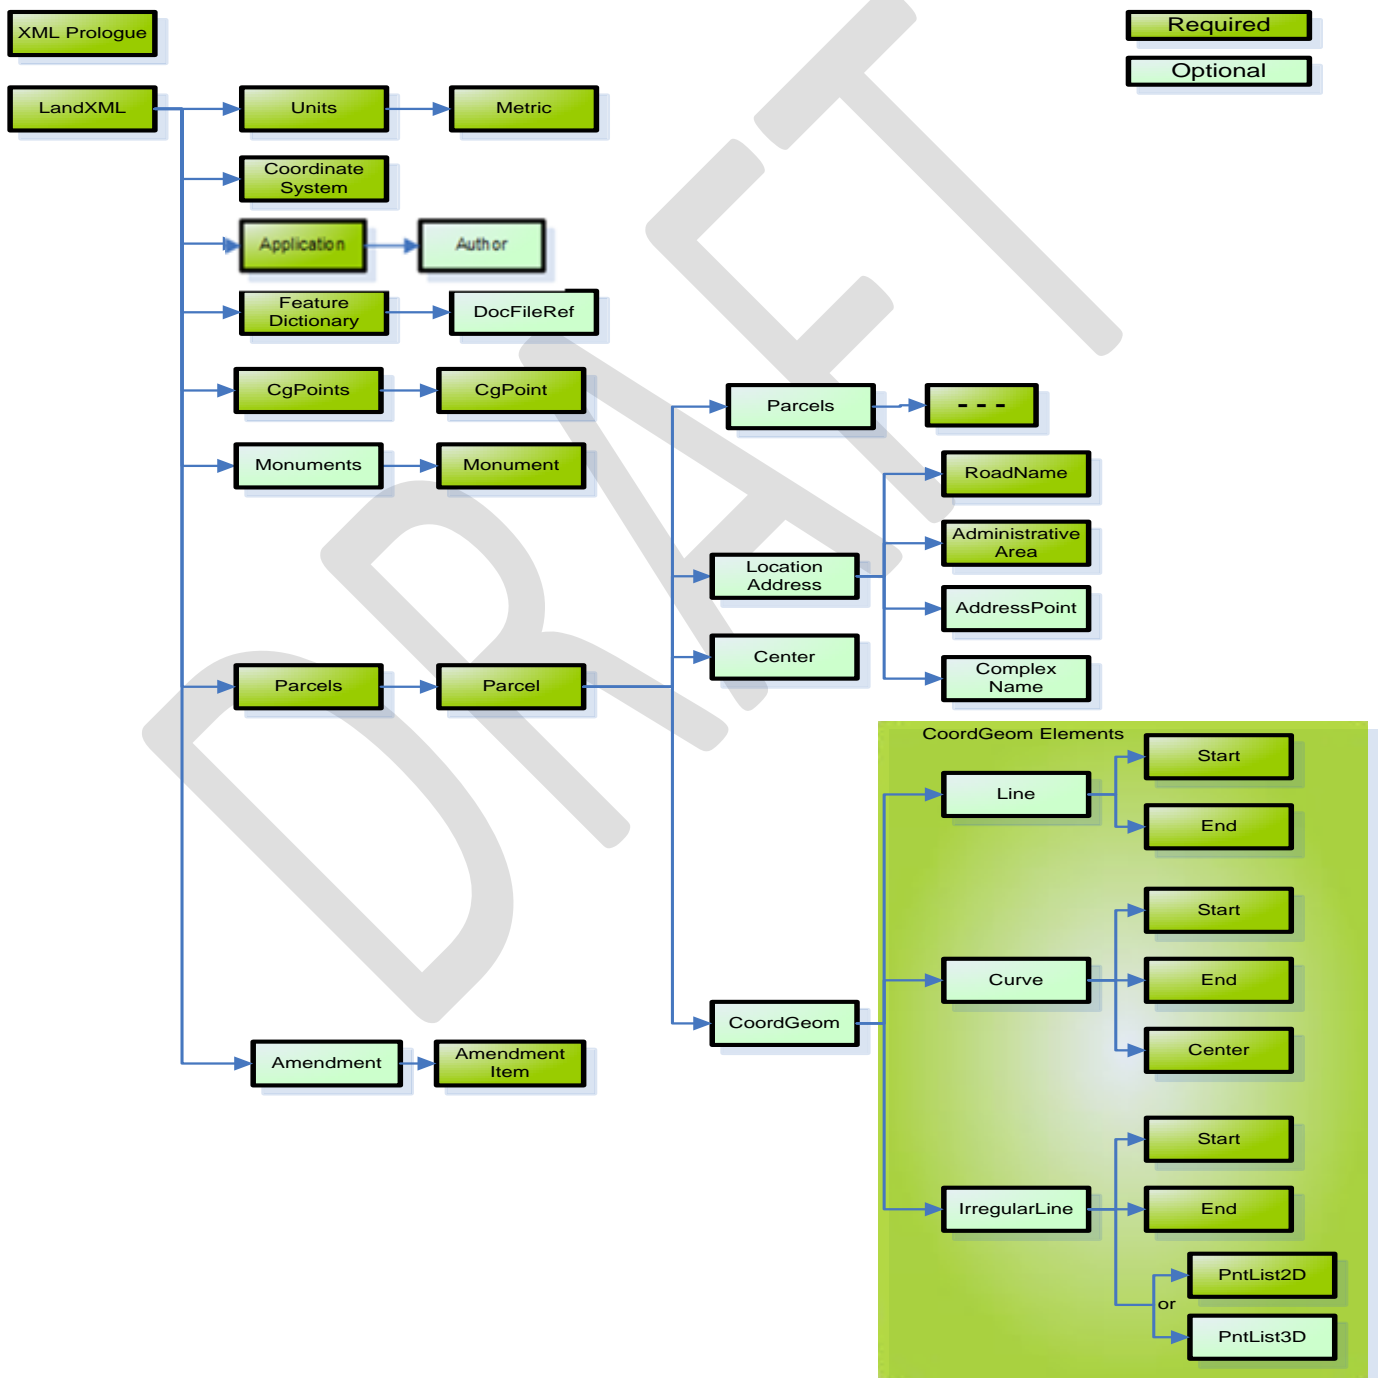

## LandXML Element Tree - Part 2

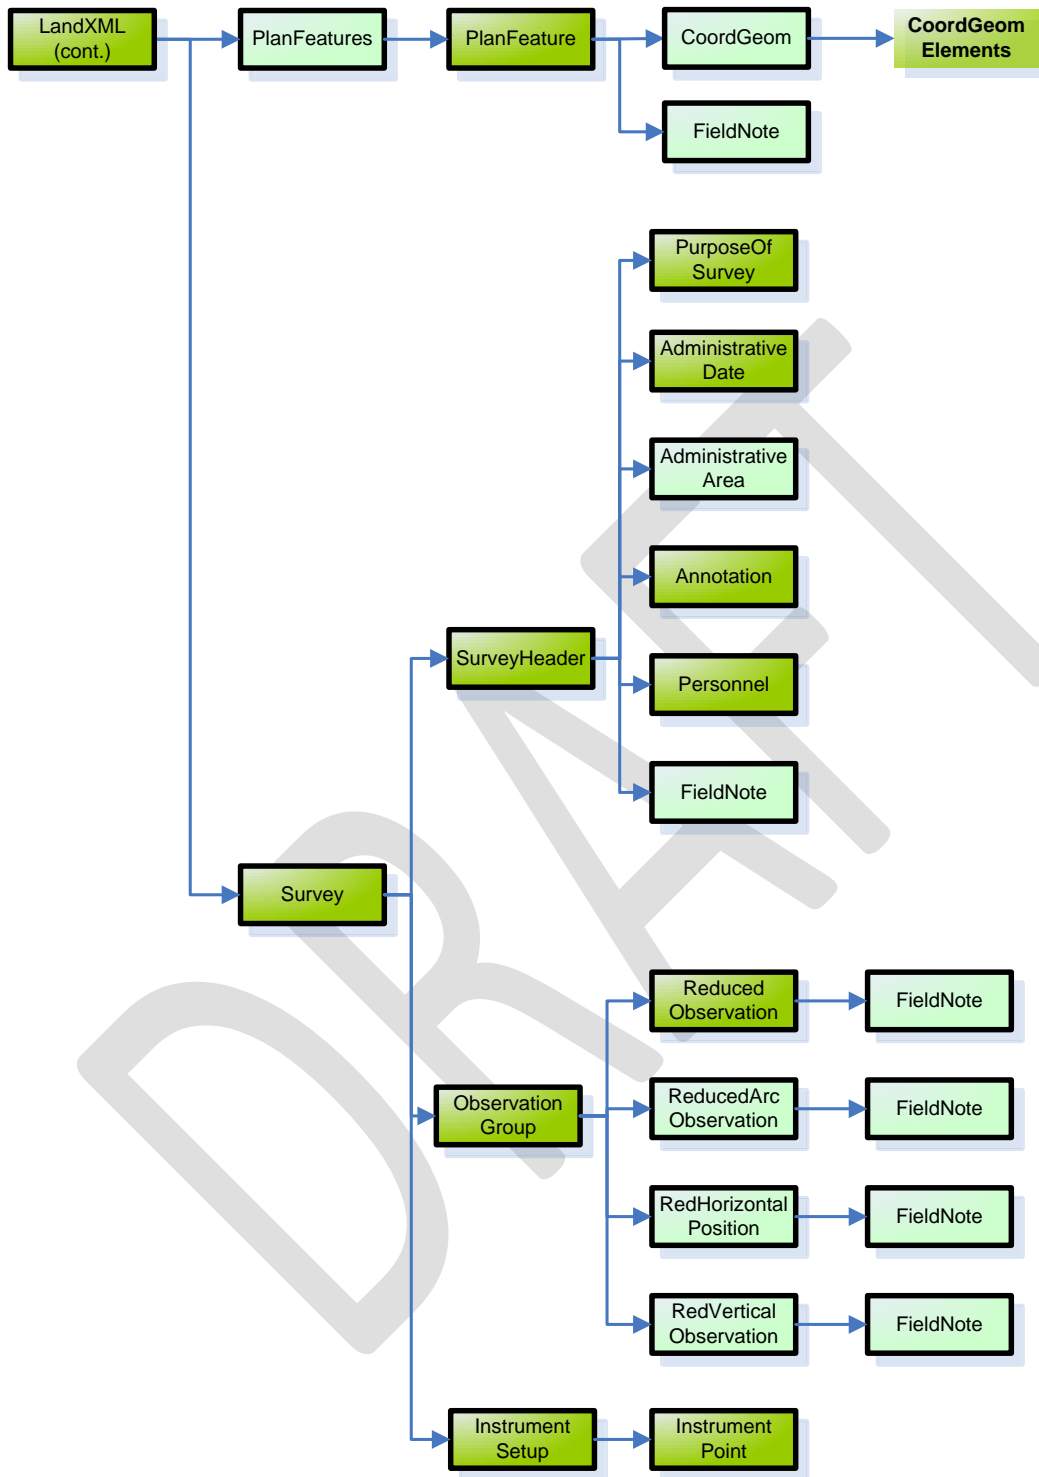



### 3. ELEMENTS AND ATTRIBUTES

#### 3.1 XML Prolog

<b>Description</b>	All XML files must start with a prologue that declares the version of XML being used and the character encoding. The XML prologue element is a requirement of the XML specification. (Note: there cannot be Byte Order Mark for it to work with validation service)		
<b>Example</b>	<code>&lt;?xml version="1.0" encoding="utf-8" ?&gt;</code>		
<b>Parent Elements</b>	None		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
version	string	R	Set to: 1.0
encoding	string	R	Set to: utf-8

#### 3.2 LandXML

<b>Description</b>	The first element in the CIF must be a LXML root element. All other elements are contained inside this element. A CIF must contain one <b>LandXML</b> element.		
<b>Example</b>	<pre> &lt;LandXML   version="1.0" date="2014-06-13" time="05:43:04"   xmlns="http://www.landxml.org/schema/LandXML-1.2"   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"   xsi:schemaLocation="http://www.landxml.org/schema/LandXML-1.2   http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd"&gt;   ...   &lt;Units&gt; ... &lt;/Units&gt;   &lt;CoordinateSystem ... &gt;&lt;/CoordinateSystem&gt;   &lt;Application ... &gt;&lt;/Application&gt;   &lt;FeatureDictionary ... &gt; ... &lt;/FeatureDictionary&gt;   &lt;CgPoints ... &gt; ... &lt;/CgPoints&gt;   &lt;Parcels ... &gt; ... &lt;/Parcels&gt;   &lt;PlanFeatures ... &gt; ... &lt;/PlanFeatures&gt;   &lt;Survey&gt; ... &lt;/Survey&gt;   &lt;Monuments&gt; ... &lt;/Monuments&gt;   &lt;Amendment ... &gt; ... &lt;/Amendment&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	None		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>Units</i>	1		
<i>CoordinateSystem</i>	1		
<i>Application</i>	1		
<i>FeatureDictionary</i>	1		
<i>CgPoints</i>	1		
<i>Parcels</i>	1		
<i>PlanFeatures</i>	0 - *		
<i>Survey</i>	1		
<i>Monuments</i>	0 - 1		
<i>Amendment</i>	0 - *		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
version	string	R	Version number of this CIF. e.g. "1.0"
date	date	R	Date that this version of the CIF was created in ISO 8601 format (yyyy-mm-dd). e.g. "2014-06-13"

time	time	R	Time that this version of the CIF was created. ISO 8601 format (hh:mm:ss). e.g. "05:43:04"
xmlns	string	R	XML namespace, set to: <a href="http://www.landxml.org/schema/LandXML-1.2">http://www.landxml.org/schema/LandXML-1.2</a>
xmlns:xsi	string	R	XML schema instance, set to: <a href="http://www.w3.org/2001/XMLSchema-instance">http://www.w3.org/2001/XMLSchema-instance</a>
xsi:schemaLocation	string	R	LandXML Schema Location for validation, set to: <a href="http://www.landxml.org/schema/LandXML-1.2">http://www.landxml.org/schema/LandXML-1.2</a> <a href="http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd">http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd</a>

### 3.3 Units

<b>Description</b>	This element defines the measurement units used by the CIF.		
<b>Example</b>	<pre> &lt;LandXML ... &gt;   ...   &lt;Units&gt;     &lt;Metric ... &gt; &lt;/Metric&gt;   &lt;/Units&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>Metric</i>			1
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None

### 3.4 Metric

<b>Description</b>	This element specifies the metric units used in the file.		
<b>Example</b>	<pre> ... &lt;Units&gt;   &lt;Metric     areaUnit="squareMeter" linearUnit="meter"     volumeUnit="cubicMeter" angularUnit="decimal dd.mm.ss"     temperatureUnit="celsius" pressureUnit="milliBars"     directionUnit="decimal dd.mm.ss"&gt;   &lt;/Metric&gt; &lt;/Units&gt; ... </pre>		
<b>Parent Elements</b>	<i>Units</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
areaUnit	metArea	R	Set to: squareMeter
linearUnit	metLinear	R	Set to: meter
volumeUnit	metVolume	R	Set to: cubicMeter
angularUnit	angularType	CR	Required if an angle is shown on the plan and set to: decimal dd.mm.ss
temperatureUnit	metTemperature	R	Set to: celsius
pressureUnit	metPressure	R	Set to: milliBars
directionUnit	angularType	R	Set to: decimal dd.mm.ss e.g. "45.3025" represent 45°30'25". Both the minutes and seconds must be two characters ranging between '00' to '60'.

### 3.5 CoordinateSystem

<b>Description</b>	The <b>CoordinateSystem</b> element defines the coordinate system used for CgPoint coordinates and the orientation information of the CIF.		
<b>Example</b>	<pre> &lt;LandXML ... &gt; ...   &lt;CoordinateSystem     datum="MM" desc="Oriented to DP54565"     horizontalDatum="Local" verticalDatum="AHD"&gt;   &lt;/CoordinateSystem&gt; ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
datum	<i>surveyBgDatumType</i>	R	This is the datum for the plan orientation e.g. "MGA", "MM", etc. If <b>datum="MM"</b> , then plan of orientation must be recorded in desc attribute. See <i>surveyBgDatumType</i> list in NSW enumerations schema for allowed values.
desc	string	CR	Required if the <b>datum="MM"</b> . Defines the plan of orientation of the survey. e.g. "Oriented to DP54565"
horizontalDatum	<i>horzDatumType</i>	R	Datum of CgPoint horizontal coordinates. Although <i>horzDatumType</i> is a list in NSW enumerations schema, it is set to: <b>Local</b> for NSW plans
verticalDatum	<i>vertDatumType</i>	CR	Required if 3D points are used. <i>The vertDatumType</i> is in NSW enumerations schema. This value should be set to: <b>AHD</b> for NSW plans

### 3.6 Application

<b>Description</b>	The <b>Application</b> element records information about the surveying software application used to create the CIF.		
<b>Example</b>	<pre> &lt;LandXML ... &gt; ...   &lt;Application     name="AcmeCAD" version="1.1.11"&gt;   &lt;/Application&gt; ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>Author</i>			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	The name of the application that created the CIF. e.g. "AcmeCAD"
version	string	R	The version of the application e.g. "1.1.11"

### 3.7 Author

<b>Description</b>	The <b>Author</b> element records the details the source of the file		
<b>Example</b>	<pre> &lt;LandXML ... &gt;   ...   &lt;Application ... &gt;     &lt;Author createdBy="NSWLRS" /&gt;   &lt;/Application&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	3.6 Application		
<b>Child Elements</b>		<b>Cardinality</b>	
None		0 - 1	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
createdBy	string	R	<p>The source of the file. Set to "Lodged" for surveyors lodged LXML Other values will be :</p> <ul style="list-style-type: none"> <li>• "NSWLRS"</li> <li>• "Back Capture Project"</li> <li>• "Spatial Services"</li> <li>• "Capture on Demand - Registered"</li> <li>• "Capture on Demand - Lodgement"</li> <li>• "Capture on Demand - Proposed"</li> </ul>

### 3.8 FeatureDictionary

<b>Description</b>	The <b>FeatureDictionary</b> element specifies the version of the reference data and enumerations list used when building the CIF. Only one Feature dictionary is used to refer to the collection of jurisdictionally specific schemas, see "ePlan Protocol – Schema Architecture" Document. For example, LGA reference data lists may be changed more frequently than jurisdictional enumerations lists and therefore are versioned as a separate feature dictionary.		
<b>Example</b>	<pre> &lt;LandXML&gt;   ...   &lt;FeatureDictionary     name="ReferenceDataContext" version="NSW-101013"&gt;     &lt;DocFileRef ... &gt;&lt;/DocFileRef&gt;   &lt;/FeatureDictionary&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	LandXML		
<b>Child Elements</b>		<b>Cardinality</b>	
<i>DocFileRef</i>		0 - *	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	The name of the feature dictionary. Names are specified at the jurisdictional level based on the organisation of jurisdictional enumeration and reference data lists.
version	string	R	The version of the feature dictionary used for this CIF.

### 3.9 DocFileRef

<b>Description</b>	The <b>DocFileRef</b> element records the details about the <b>FeatureDictionary</b> including the names, locations and attributes of the files that comprise the feature dictionary.		
<b>Example</b>	<pre> ... &lt;FeatureDictionary ... &gt;   &lt;DocFileRef     name="au-gov-nsw-icsm-cif-enumerated-types.xsd" location="     http://www.nswlrs.com.au/__data/assets/xml_file/0010/137368/xml-gov-     au-nsw-icsm-eplan-cif-referencedata-101013.xml"&gt;   &lt;/DocFileRef&gt; ... &lt;/FeatureDictionary&gt; ... </pre>		
<b>Parent</b>	<i>FeatureDictionary</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	File name
location	Any URI	R	URL of the NSW reference data context. Refer to section 2.4 of the schema architecture implementation for details on use. Reference data context for NSW must be set to: http://www.nswlrs.com.au/__data/assets/xml_file/0010/137368/xml-gov-au-nsw-icsm-eplan-cif-referencedata-101013.xml

### 3.10 CgPoints

<b>Description</b>	The <b>CgPoints</b> element is a container for all the points created as <b>CgPoint</b> in the file.		
<b>Example</b>	<pre> &lt;LandXML ... &gt; ...   &lt;CgPoints     zoneNumber="56"&gt; ...     &lt;CgPoint ... &gt; ... &lt;/CgPoint&gt; ...   &lt;/CgPoints&gt; ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>CgPoint</i>			1 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
zoneNumber	<i>zoneNumberType</i>	R	The MGA Zone No is mandatory for all plans, including plans on MM orientation

### 3.11 CgPoint

<b>Description</b>	A <b>CgPoint</b> represents a point in the CIF. They may represent boundary points, traverse points, reference marks, permanent survey marks and various administrative points. The datum for these points is specified by <b>CoordinateSystem@horizontalDatum</b> , which is set to <b>Local</b> for NSW plans.		
<b>Example</b>	<pre> ... &lt;CgPoints ... &gt;   &lt;CgPoint     name="822" desc="A" state="existing"     pntSurv="control" oID="22126"&gt;       6257928.410000 333988.599000 78.7360     &lt;/CgPoint&gt;   &lt;/CgPoints&gt; ... </pre>		
<b>Element Content</b>	Coordinate values for the point. Two dimensional coordinates are a coordinate pair of the Northing followed by Easting. Three dimensional coordinates are a coordinate triplet: Northing, Easting and Height. Coordinates are separated by a single space.		
<b>Parent Elements</b>	<i>CgPoints</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier for the point.
oID	string	CR	Required for Survey Control points. Value is the mark number from SCIMS
desc	string	CR	This is mainly used for labelling the datum terminal points. Two points must have this attribute one must be labelled "A" and the other "B".  Other alphanumeric starting from "C" can also be used to label specific points for other purposes.
state	<i>stateType</i>	R	The state of the CgPoint in the context of other CgPoints in the CIF. "proposed" or "existing" are the only state that can be used in NSW
pntSurv	<i>survPntType</i>	R	This is to specify the point type and following types can be used in NSW. <ul style="list-style-type: none"> <li>• <b>"boundary"</b> for all boundary points of all parcels (regardless of <b>Parcel@state</b>)</li> <li>• <b>"control"</b> points for control marks</li> <li>• <b>"reference"</b> points for reference marks</li> <li>• <b>"sideshot"</b> points for parcel centre, curve centre, occupation points and diagram only points.</li> <li>• <b>"traverse"</b> for all other points</li> </ul>

code	string	R for SP's	Location Plan or Floor Plan Level on which the point exists – see Section 5 for instructions on code value requirements  Will be the same as the Parcel@BuildingLevelNo attribute for boundary points.
------	--------	------------	--

### 3.12 Monuments

<b>Description</b>	The <b>Monuments</b> element is a container <b>Monument</b> element, which contains details for boundary, reference and control marks as well as offsets of occupations.		
<b>Example</b>	<pre> &lt;LandXML ... &gt;   ...   &lt;Monuments&gt;     ...     &lt;Monument ... &gt;&lt;/Monument&gt;     ...   &lt;/Monuments&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>Monument</i>			1 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None

### 3.13 Monument

<b>Description</b>	The <b>Monument</b> element defines the physical attributes of all survey marks on the plan including boundary, reference and control marks as well as offsets of occupations. A <b>Monument</b> must be linked to a <b>CgPoint</b> using the <b>pntRef</b> attribute. The <b>CgPoint</b> defines the survey mark's relational position against all other points and identification.		
<b>Example</b>	<pre> ... &lt;Monuments&gt;   ...   &lt;Monument     name="1" pntRef="5" type="Peg" state="Found"     desc="Original lot peg" condition="Remains"     originSurvey="DP654321"   &lt;/Monument&gt;   ... &lt;/Monuments&gt; ... </pre>		
<b>Parent Elements</b>	<i>Monuments</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier for the point. Can be a sequence starting at "1"
pntRef	pointNameRef (string)	R	Reference to the <b>name</b> attribute of the linked <b>CgPoint</b> .
type	<i>monumentType</i>	CR	Jurisdictional list of monument types – see <i>monumentType</i> list in NSW enumerations schema e.g. "Peg", "GIP", "DH&W", etc.  Required for all marks except for marks with a state of "Gone" or "Not Found"

state	<i>monumentState</i>	R	Jurisdictional list of monument states – see <i>monumentState</i> list in NSW enumerations schema This is the state of the mark itself and required for all marks e.g. "Found", "Placed", etc.
desc	string	CR	Surveyor's description of the monument.  Required if the monumentType does not fully describe the monument.  <i>If the monument is a SCIMS mark and used as a reference mark as well, then desc should state "used as reference mark"</i>
condition	<i>monumentCondition</i>	O	<i>Only used for Control Marks if applicable.</i> Jurisdictional list of monument condition – see <i>monumentCondition</i> list in NSW enumerations schema e.g. "Destroyed", "Subsidence Area", etc. <i>Note:For Bounday and Reference Marks use the desc attribute</i>
originSurvey	string	CR	This is the plan number that physically placed the mark and required for all found marks with exception of SCIMS and boundary marks. e.g. "DP1145678", "16.789", "Origin unknown", etc.

### 3.14 Parcels

<b>Description</b>	The <b>Parcels</b> element is a container for individual <b>Parcel</b> elements. <b>Parcels</b> containers can be nested within <b>Parcel</b> elements to capture parcel relationships.		
<b>Example</b>	<pre> &lt;LandXML ... &gt; ...   &lt;Parcels&gt;     ...     &lt;Parcel ... &gt; ... &lt;/Parcel&gt;     ...   &lt;/Parcels&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>Parcel</i>			1 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None



### 3.15 Parcel

<b>Description</b>	The <b>Parcel</b> element provides a basic unit to describe a spatial area. A <b>Parcel</b> element can contain a nested <b>Parcels</b> element that has <b>Parcel</b> child elements. There are fewer required attributes for these "sub" parcels, generally only requiring a <b>name</b> and <b>pclRef</b> .		
<b>Example</b>	<pre> ... &lt;Parcels&gt;   ...   &lt;Parcel     name="1" area="3225.6" parcelType="Single"     state="proposed" class="Lot"     useOfParcel="Public Reserve" parcelFormat="Standard"&gt;     &lt;Center ... /&gt;     &lt;CoordGeom ... &gt; ... &lt;/CoordGeom&gt;     &lt;LocationAddress ... &gt; ... &lt;/LocationAddress&gt;   &lt;/Parcel&gt;   &lt;Parcel     name="2" parcelType="Multipart" ... &gt;     &lt;Parcels&gt;       &lt;Parcel name="A" pclRef="2A"/&gt;       &lt;Parcel name="B" pclRef="2B"/&gt;     &lt;/Parcels&gt;   &lt;/Parcel&gt;   &lt;Parcel name="2A" parcelType="Part" ... &gt; ... &lt;/Parcel&gt;   &lt;Parcel name="2B" parcelType="Part" ... &gt; ... &lt;/Parcel&gt;   &lt;Parcel     name="E1" class="Easement"     desc="Right of Carriageway Variable Width" ... &gt;     &lt;CoordGeom ... &gt; ... &lt;/CoordGeom&gt;   &lt;/Parcel&gt;   &lt;Parcel     name="R1" class="Road"     desc="NICHOLSONS LANE (20.115 WIDE)" ... &gt;     &lt;Center ... /&gt;     &lt;CoordGeom ... &gt; ... &lt;/CoordGeom&gt;   &lt;/Parcel&gt;   ... &lt;/Parcels&gt; ... </pre>		
<b>Parent Elements</b>	<i>Parcels</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>Center</i>	0 - 1		
<i>CoordGeom</i>	0 - 1		
<i>Parcels</i>	0 - 1		
<i>LocationAddress</i>	0 - *		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>

name	string	R	<ul style="list-style-type: none"> <li>Lot number for new lots e.g. "1", "2", etc.</li> <li>Lot/plan for adjoining lots. e.g. "1/DP123456", "A/DP235", etc.</li> </ul> <p><i>Note: any string combination of alpha/numeric characters can be used for adjoining parcels</i></p> <ul style="list-style-type: none"> <li>All Road ,Secondary Interest (including Easement) and Hydrography parcels must start with prefix 'R' , 'E' and "H" respectively followed by integers. i.e.</li> <li>"R1", "R2", etc. for Roads</li> <li>"E1", "E2", etc. for Secondary Interests</li> <li>"H1", "H2", etc. for Hydrography parcels</li> <li>For actual Road, Easement and water body names please refer to desc attribute</li> </ul>
area	double	CR	The legal area. Required for new lots. Must be in units as specified in <b>Units</b> element. ( <i>set to m<sup>2</sup> in NSW</i> )
parcelType	<i>parcelTypeType</i>	R	Jurisdictional list of the parcel construction type – see <i>parcelTypeType</i> list in NSW enumerations schema e.g. "Single", "Multipart", etc. <i>Note: First letter must be upper case.</i>
state	<i>parcelStateType</i>	R	The state of the parcel in the context of other parcels on the plan and only the following three states can be used. <ul style="list-style-type: none"> <li>"proposed" - for all subject parcels</li> <li>"adjoining" - for all other parcels outside the subject parcels</li> <li>"existing" - for all existing parcels within the boundaries of subject parcels e.g. an existing easement within a new lot</li> <li>"affected" for SP base parcel</li> </ul>
class	<i>parcelClass</i>	R	In the context of the survey plan, the class that a parcel belongs to i.e. its grouping. See <i>parcelClass</i> list in NSW enumerations schema e.g. "Lot", "Road", "Easement", etc.
desc	string	CR	Required, if the parcel class="Road", "Easement" , any secondary interest or Hydrography parcels. For a Road, it should have Road name, type, width and/or alignment details For a new Easement, it should be easement name and/or width as per 88B instrument. e.g. "Easement to Drain Water 0.5 wide" For an existing Easement, it should also contain the creating instrument as well as easement name and/or width. e.g. "Easement for Drainage 1 wide - vide DP13" All Secondary Interest parcels should have appropriate description/name in this attribute <ul style="list-style-type: none"> <li>For Hydrography parcels this attribute records the name of the water body e.g. "Pioneer River</li> </ul>

useOfParcel	<i>useOfParcelType</i>	O	Jurisdictional list of the use of a parcel that further defines the specific use – see <i>useOfParcelType</i> list in NSW enumerations schema e.g. "Public Reserve", etc.
parcelFormat	<i>parcelFormat</i>	R	Jurisdictional list of the physical format of a parcel – see <i>parcelFormat</i> list in NSW enumerations schema e.g. "Standard", "Stratum", etc.
buildingNo	string	CR	Required for the parcel defining the Building(s) with the Street No(s) on the location plan This is the street No for the strata scheme
buildingLevelNo	string	CR	Required where parcelFormat="Strata" This is used to indicate the level on which the strata lot or CP parcels exist. It is also used to indicate the base parcel that is on the Location Plan
pclRef	parcelNameRef (string)	CR	Reference identifier used to link the parts of multipart lots – see <i>section 4.1</i> of this document

### 3.16 LocationAddress

<b>Description</b>	The <b>LocationAddress</b> element contains street address information for its parent element.		
<b>Example</b>	<pre> ... &lt;Parcel ... &gt;   ...   &lt;LocationAddress     addressType="..." flatType="..." flatNumber="..." floorLevelType="..."     "floorLevelNumber="..." numberFirst="..." numberSuffixFirst="..."     numberLast="..."     numberSuffixLast="..."&gt;     &lt;ComplexName ... &gt;&lt;ComplexName/&gt;     &lt;RoadName ... &gt;&lt;RoadName/&gt;     &lt;AdministrativeArea ... &gt;&lt;AdministrativeArea/&gt;     &lt;AddressPoint ... &gt;&lt;AddressPoint &gt;   &lt;/LocationAddress&gt;   ... &lt;/Parcel&gt; ... </pre>		
<b>Parent Elements</b>	<i>Parcel</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>ComplexName</i>			0 - *
<i>RoadName</i>			1 - *
<i>AdministrativeArea</i>			1 - *
<i>AddressPoint</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
addressType	<i>addressTypeType</i>	R	The type of the address. A Parcel could have many addresses as it could have several frontages and be used for different purposes. For example it may have a primary address and several aliases.
flatType	<i>flatTypeType</i>	O	Jurisdictional list of the flat type – see <i>flatTypeType</i> list in NSW enumerations schema e.g. "Unit", "Townhouse", etc.
flatNumber	string	O	The number of the flat
floorLevelType	<i>floorLevelTypeType</i>	O	Jurisdictional list of the floor level type – see <i>floorLevelTypeType</i> list in NSW enumerations schema e.g. "Basement", "Ground", etc.

floorLevelNumber	string	O	The number of the floor level
numberFirst	int	O	The street address number or the first street address number in a range of numbers
numberSuffixFirst	string	O	The alpha suffix of the first street address number e.g. "A"
numberLast	int	O	The last street address number in a range of numbers.
numberSuffixLast	string	O	The alpha suffix of the last street address number e.g. "B"

### 3.17 ComplexName

<b>Description</b>	The <b>ComplexName</b> element is used to store the site name and building name.		
<b>Example</b>	<pre> ... &lt;LocationAddress ... &gt;   ...   &lt;ComplexName     desc="Riverview" priority="1"&gt;   &lt;ComplexName/&gt;   ... &lt;/LocationAddress&gt; ... </pre>		
<b>Parent Elements</b>	<i>LocationAddress</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
desc	string	R	The site name, building name or other name.
priority	int	R	The priority of the <b>ComplexName</b> is relation to other <b>ComplexName</b> being defined in the <b>LocationAddress</b> .

### 3.18 RoadName

<b>Description</b>	The <b>RoadName</b> element is used to store the details of the road fronted by the property.		
<b>Example</b>	<pre> ... &lt;LocationAddress ... &gt;   ...   &lt;RoadName     roadNameType="Street" roadName="Smith"     roadNameSuffix=" ..." roadType="Public Highway" pciRef=" ..." &gt;   &lt;RoadName/&gt;   ... &lt;/LocationAddress&gt; ... </pre>		
<b>Parent Elements</b>	<i>LocationAddress</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
roadNameType	<i>roadNameTypeType</i>	R	Jurisdictional list of the road name type – see <i>roadNameTypeType</i> list in NSW enumerations schema e.g. "Street", "Lane", etc.
roadName	string	R	The name of the road (without Type or Suffix)
roadNameSuffix	<i>roadNameSuffixType</i>	O	Jurisdictional list of the suffix type of the road name – see <i>roadNameSuffixType</i> list in NSW enumerations schema e.g. "East", "West", etc. Any prefix is also recorded in this attribute

roadType	<i>roadTypeType</i>	R	Jurisdictional list of the road type – see <i>roadTypeType</i> list in NSW enumerations schema e.g. "Public" or "Private"
pclRef	parcelNameRefs (string)	O	Reference to physical road parcel.

### 3.19 AddressPoint

<b>Description</b>	The <b>AddressPoint</b> element describes the geographic location of an address using coordinates either contained in a linked <b>CgPoint</b> element or as a space delimited list inside the element.		
<b>Example</b>	<pre> ... &lt;LocationAddress ... &gt;   ...   &lt;AddressPoint     addressPointType="Access Point" pntRef="1004"&gt;   &lt; /AddressPoint/&gt;   ... &lt;/LocationAddress&gt; ... </pre>		
<b>Parent Elements</b>	<i>LocationAddress</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
addressPointType	<i>addressPointTypeType</i>	R	Jurisdictional list of address point type – see <i>addressPointTypeType</i> list in NSW enumerations schema e.g. "Access Point" or "Centroid of Parcel"
pntRef	pointNameRef (string)	R	The <b>CgPoint</b> representing the location of the address point. Value must be a <b>CgPoint@name</b> attribute in the CIF.

### 3.20 Center

<b>Description</b>	<p>The <b>Center</b> element represents either:</p> <ul style="list-style-type: none"> <li>• A nominal centre point for a <b>Parcel</b> element, or</li> <li>• The centre point of the <b>Curve</b> element</li> </ul> <p>The <b>pntRef</b> attribute references the <b>CgPoint@name</b> attribute.</p>		
<b>Example</b>	<pre> ... &lt;Parcel ... &gt;   &lt;Center pntRef="108"/&gt;   ...   &lt;CoordGeom ... &gt;     ...     &lt;Curve ... &gt;       ...       &lt;Center pntRef="23"/&gt;       ...     &lt;/Curve&gt;     ...   &lt;/CoordGeom&gt; &lt;/Parcel&gt; ... </pre>		
<b>Parent Element</b>	<i>Parcel, Curve</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			

Attribute	Type	Required	Description
pntRef	pointNameRef (string)	R	Value must be a <b>CgPoint@name</b> attribute in the CIF.

### 3.21 CoordGeom

<b>Description</b>	<p>The <b>CoordGeom</b> element is a container for the spatial components of its parent element.</p> <p>This section defines the lines that form each parcel or a feature in a clockwise sequence.</p>		
<b>Example</b>	<pre> ... &lt;Parcel ... &gt;   ...   &lt;CoordGeom     name="189857-1-60" desc=" ..." &gt;     ...     &lt;Line ... &gt; ... &lt;/Line&gt;     &lt;Curve ... &gt; ... &lt;/Curve&gt;     &lt;IrregularLine ... &gt; ... &lt;/IrregularLine&gt;     ...   &lt;/CoordGeom&gt;   ... &lt;/Parcel&gt; ... &lt;PlanFeature ... &gt;   ...   &lt;CoordGeom     name="Building-1" desc="DBL BK HOUSE" &gt;     ...     &lt;Line ... &gt; ... &lt;/Line&gt;     &lt;Curve ... &gt; ... &lt;/Curve&gt;     &lt;IrregularLine ... &gt; ... &lt;/IrregularLine&gt;     ...   &lt;/CoordGeom&gt;   ... &lt;/PlanFeature&gt; ... </pre>		
<b>Parent Elements</b>	<i>Parcel, PlanFeature</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
<i>Line</i>		0 - *	
<i>Curve</i>		0 - *	
<i>IrregularLine</i>		0 - *	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier.
desc	string	O	Free text description of the <b>CoordGeom</b> element. e.g. description of occupation such as, "DBL BK HOUSE", etc.

### 3.22 Line

<b>Description</b>	The <b>Line</b> element represents a straight line between two points. The line may be used to construct a 2D or 3D object.		
<b>Example</b>	<pre> ... &lt;CoordGeom ... &gt;   ...   &lt;Line     desc=" ... " note=" ... "&gt;     &lt;Start ... /&gt;     &lt;End ... /&gt;   &lt;/Line&gt;   ... &lt;/CoordGeom&gt; ... </pre>		
<b>Parent Elements</b>	<i>CoordGeom</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
<i>Start</i>		1	
<i>End</i>		1	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
desc	string	O	Free text description of the line.
note	string	O	For annotation purposes- used to annotate what a structural boundary in a SP is defined by e.g. Edge of concrete. Would usually be noted with an designation such as C with an Annotation@type= Plan Note to identify what the designation represents e.g. "C-EDGE OF CONCRETE"

### 3.23 Curve

<b>Description</b>	A <b>Curve</b> is a specific type of regular line between two points. It is defined by its start and end points, its radius, direction of rotation and centre point (i.e. radius point).		
<b>Example</b>	<pre> ... &lt;CoordGeom ... &gt;   ...   &lt;Curve     rot="ccw" radius="122.900" note=" ... "&gt;     &lt;Start ... /&gt;     &lt;Center ... /&gt;     &lt;End ... /&gt;   &lt;/Curve&gt;   ... &lt;/CoordGeom&gt; ... </pre>		
<b>Parent Elements</b>	<i>CoordGeom</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
<i>Start</i>		1	
<i>End</i>		1	
<i>Center</i>		1	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
radius	double	R	The radius of the curve
rot	<i>clockwise</i>	R	Direction from <b>Start</b> to <b>End</b> Value will be either "cw" for clockwise or "ccw" for counter clockwise

note	string	O	For annotation purposes- used to annotate what a structural boundary in a SP is defined by e.g. Edge of concrete. Would usually be noted with an designation such as C with an Annotation@type= Plan Note to identify what the designation represents e.g. "C-EDGE OF CONCRETE"
------	--------	---	---

### 3.24 IrregularLine

<b>Description</b>	Irregular lines are used to capture non-surveyed lines (e.g. river boundary). An <b>IrregularLine</b> must have a <b>CgPoint</b> as its start and end point and a point list to define the line between the start and end points.		
<b>Example</b>	<pre> ... &lt;CoordGeom ... &gt; ...   &lt;IrregularLine     desc="Left Bank of Darling River" source="DP1234" note=" ... "&gt;     &lt;Start ... /&gt;     &lt;End ... /&gt;     &lt;PntList2D&gt; ... &lt;/PntList2D&gt;   &lt;/IrregularLine&gt; ...   &lt;IrregularLine     desc=" ... " &gt;     &lt;Start ... /&gt;     &lt;End ... /&gt;     &lt;PntList3D&gt; ... &lt;/PntList3D&gt;   &lt;/IrregularLine&gt; ... &lt;/CoordGeom&gt; ... </pre>		
<b>Parent Elements</b>	<i>CoordGeom</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>Start</i>	1		
<i>End</i>	1		
<i>PntList2D</i> or <i>PntList3D</i>	1		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
desc	string	R	Free text description of the irregular line. e.g. "Left Bank of Darling River"
source	string	O	Required if the line has been adopted from another source. e.g. "DP1234"
note	string	O	For annotation purposes- used to annotate what a structural boundary in a SP is defined by e.g. Edge of concrete. Would usually be noted with an designation such as C with an Annotation@type= Plan Note to identify what the designation represents e.g. "C-EDGE OF CONCRETE"



### 3.25 Start

<b>Description</b>	The <b>Start</b> element represents the 'from' point of linear elements such as <b>Curve</b> , <b>Line</b> , <b>IrregularLine</b> (cf. <b>End</b> ).		
<b>Example</b>	<pre> ... &lt;Line ... &gt;     ...     &lt;Start pntRef="214"/&gt;     ... &lt;/Line&gt; &lt;Curve ... &gt;     ...     &lt;Start pntRef="224"/&gt;     ... &lt;/Curve&gt; &lt;IrregularLine ... &gt;     ...     &lt;Start pntRef="234"/&gt;     ... &lt;/IrregularLine&gt; ... </pre>		
<b>Parent Elements</b>	<i>Line, Curve, IrregularLine</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
pntRef	pointNameRef (string)	R	Value must be a <b>CgPoint@name</b> attribute in the CIF.

### 3.26 End

<b>Description</b>	The <b>End</b> element represents the 'to' point of linear elements such as <b>Curve</b> , <b>Line</b> , <b>IrregularLine</b> (cf. <b>Start</b> ).		
<b>Example</b>	<pre> ... &lt;Line ... &gt;     ...     &lt;End pntRef=" 215"/&gt;     ... &lt;/Line&gt; &lt;Curve ... &gt;     ...     &lt;End pntRef="225"/&gt;     ... &lt;/Curve&gt; &lt;IrregularLine ... &gt;     ...     &lt;End pntRef="235"/&gt;     ... &lt;/IrregularLine&gt; ... </pre>		
<b>Parent Elements</b>	<i>Line, Curve, IrregularLine</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
pntRef	pointNameRef (string)	R	Value must be a <b>CgPoint@name</b> attribute in the CIF.

### 3.27 PntList2D

<b>Description</b>	<p>The <b>PntList2D</b> element is used with associated <b>Start</b> and <b>End</b> elements to define a two dimensional line using a sequence of space separated (y, x) or (northing, easting) coordinate pairs that are the content of the element.</p> <p>The first and last coordinate pair must match the associated <b>Start</b> and <b>End</b> points coordinate pairs respectively (therefore the element must contain at least two coordinate pairs).</p>		
<b>Example</b>	<pre> ... &lt;IrregularLine ... &gt;   ...   &lt;PntList2D&gt;     6263281.740730 287046.916070     6263280.340620 287047.461040     ...     6263260.670370 287028.817030     6263257.385810 287025.211110   &lt;/PntList2D&gt; &lt;/IrregularLine&gt; ... </pre>		
<b>Element Content</b>	<p>A space delimited list of coordinate values in Northing Easting pairing.</p> <p><b>&lt;PntList2D&gt;</b>N<sub>0</sub> E<sub>0</sub> N<sub>1</sub> E<sub>1</sub> ... N<sub>n</sub> E<sub>n</sub><b>&lt;/PntList2D&gt;</b></p>		
<b>Parent Elements</b>	<i>IrregularLine</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None

### 3.28 PntList3D

<b>Description</b>	<p>The <b>PntList3D</b> element is used with associated <b>Start</b> and <b>End</b> elements to define a three dimensional line using a sequence of space separated (y, x, z) or (northing, easting, height) coordinate sets that are the content of the element.</p> <p>The first and last coordinate set must match the associated <b>Start</b> and <b>End</b> points coordinate sets respectively (therefore the element must contain at least two coordinate sets).</p>		
<b>Example</b>	<pre> ... &lt;IrregularLine ... &gt;   ...   &lt;PntList3D&gt;     6263281.740730 287046.916070 27.780     6263280.340620 287047.461040 26.880     ...     6263260.670370 287028.817030 28.489     6263257.385810 287025.211110 28.597   &lt;/PntList3D&gt; &lt;/IrregularLine&gt; ... </pre>		
<b>Element Content</b>	<p>A space delimited list of coordinate values in Northing Easting Height.</p> <p><b>&lt;PntList3D&gt;</b>N<sub>0</sub> E<sub>0</sub> H<sub>0</sub> N<sub>1</sub> E<sub>1</sub> H<sub>1</sub> ... N<sub>n</sub> E<sub>n</sub> H<sub>n</sub><b>&lt;/PntList3D&gt;</b></p>		
<b>Parent Elements</b>	<i>IrregularLine</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None

### 3.29 PlanFeatures

<b>Description</b>	A container for <b>PlanFeature</b> elements. In NSW this element is used for occupations being walls, fences, buildings, etc. or extremity of transmission line easements.		
<b>Example</b>	<pre> &lt;LandXML ... &gt; ...   &lt;PlanFeatures     name="Occupation"&gt; ...     &lt;PlanFeature ... &gt; ... &lt;/PlanFeature&gt; ...   &lt;/PlanFeatures&gt; ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>PlanFeature</i>			1 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Set to: <i>Occupation</i>

### 3.30 PlanFeature

<b>Description</b>	The <b>PlanFeature</b> element is used to define and facilitate rendering of occupations on the plan including walls, fences, buildings, kerbs, etc. as well as extremity of transmission line easements.		
<b>Example</b>	<pre> ... &lt;PlanFeatures ... &gt; ...   &lt;PlanFeature     name="Wall-1" desc="Retaining Wall"&gt; ...     &lt;CoordGeom ... &gt; ... &lt;/CoordGeom&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt; ...   &lt;/PlanFeature&gt; ... &lt;/PlanFeatures&gt; ... </pre>		
<b>Parent Elements</b>	<i>PlanFeatures</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>CoordGeom</i>			0-1
<i>FieldNote</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Must have a prefix of "Building", "Wall", "Fence", "Kerb" or "Offset" to facilitate the correct line style for the rendering
desc	string	R	Free text description of the <b>PlanFeature</b> element is required. <i>Note: Where this element is used for the perimeter boundary of transmission line easements the "desc" attribute should have a prefix of "DNR"– see Section 4.13 of this document</i>

### 3.31 Survey

<b>Description</b>	The <b>Survey</b> element contains the survey components of the ePlan.		
<b>Example</b>	<pre> &lt;LandXML ... &gt;   ...   &lt;Survey&gt;     ...     &lt;SurveyHeader ... &gt; ... &lt;/SurveyHeader&gt;     &lt;InstrumentSetup ... &gt; ... &lt;/InstrumentSetup&gt;     &lt;ObservationGroup ... &gt; ... &lt;/ObservationGroup&gt;     ...   &lt;/Survey&gt;   ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>SurveyHeader</i>	1		
<i>InstrumentSetup</i>	1 - *		
<i>ObservationGroup</i>	1		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
			None

### 3.32 SurveyHeader

<b>Description</b>	The <b>SurveyHeader</b> element contains administrative information about the survey.		
<b>Example</b>	<pre> ... &lt;Survey&gt;   ...   &lt;SurveyHeader     name="1189857"     desc="Plan of SUBDIVISION OF LOT 1343 DP1171493"     jurisdiction="New South Wales" surveyFormat="Standard"     type="surveyed" surveyorFirm="CRAIG &amp; RHODES"     surveyorReference="72-10-1343"&gt;     ...     &lt;Personnel ... /&gt;     &lt;PurposeOfSurvey ... /&gt;     &lt;Annotation ... /&gt;     &lt;AdministrativeArea ... /&gt;     &lt;AdministrativeDate ... /&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt;     ...   &lt;/SurveyHeader&gt;   ... &lt;/Survey&gt; ... </pre>		
<b>Parent Elements</b>	<i>Survey</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>Personnel</i>	1		
<i>PurposeOfSurvey</i>	1		
<i>Annotation</i>	1 - *		
<i>AdministrativeArea</i>	0 - *		
<i>AdministrativeDate</i>	1 - *		
<i>FieldNote</i>	0 - *		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Should be the DP No. without the DP" prefix. e.g. "DP12345" to be recorded as "12345"
desc	string	R	This is the plan heading e.g. "Plan of subdivision of ... "

jurisdiction	<i>jurisdictionType</i>	R	Set to: <i>New South Wales</i>
surveyorFirm	string	O	The name of the surveying firm
surveyorReference	string	R	Surveying firms internal reference ID
surveyFormat	<i>surveyFormatType</i>	R	Jurisdictional list of the survey format type – see <i>surveyFormatType</i> list in NSW enumerations schema e.g. "Standard", "Stratum", "Strata", etc.
type	<i>surveyType</i>	R	This is plan survey type, which is either "compiled" or "surveyed" for NSW plans. If the plan is partially surveyed then it should be "surveyed"

### 3.33 AdministrativeArea

<b>Description</b>	The <i>AdministrativeArea</i> element contains the administrative areas relevant to this survey. It defines a number of different types of administrative areas such as local government and locality. Each entry can link to a parcel element that defines the boundaries of the administrative area.		
<b>Example</b>	<pre> ... &lt;SurveyHeader ... &gt; ...   &lt;AdministrativeArea     adminAreaType="Locality" adminAreaName="PENRITH"     adminAreaCode="2750" pclRef="PENRITH"/&gt;   &lt;AdministrativeArea     adminAreaType="Local Government Area"     adminAreaName="PENRITH"/&gt;   &lt;AdministrativeArea     adminAreaType="Parish" adminAreaName="CASTLEREAGH"/&gt;   &lt;AdministrativeArea     adminAreaType="County" adminAreaName="CUMBERLAND"/&gt;   &lt;AdministrativeArea     adminAreaType="Survey Region" adminAreaName="Urban"/&gt;   &lt;AdministrativeArea     adminAreaType="Terrain" adminAreaName="Level-Undulating"/&gt; ... &lt;/SurveyHeader&gt; ... </pre>		
<b>Parent Elements</b>	<i>SurveyHeader, LocationAddress</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
adminAreaType	<i>adminAreaTypeType</i>	R	Jurisdictional list of administrative area types – see <i>adminAreaTypeType</i> list in NSW enumerations schema e.g. "Locality", "Parish", "County", etc.
		CR	<b>This will also be used;</b> <ul style="list-style-type: none"> <li>to identify if the surveyed area is "Urban" or "Rural" area, adminAreaType is set to "Survey Region" – Not required for compiled plan</li> <li>to identify if the terrain type of surveyed area is "Level-Undulating" or "Steep-Mountainous", adminAreaType is set to "Terrain" – Required for partially compiled plan</li> </ul>
		CR	

adminAreaName	string	R  CR  CR	The full name of the administrative area (County, Parish, Locality, LGA). e.g. "PENRITH", "CUMBERLAND" or If <b>adminAreaType</b> ="Survey Region", it should be populated with either "Urban" or "Rural" or If <b>adminAreaType</b> ="Terrain", it should be populated with either "Level-Undulating" or "Steep-Mountainous"
adminAreaCode	string	O	The code or identifier of the administrative area. e.g. "2750" (Post Code for a Locality)
pclRef	parcelNameRefs (string)	O	A reference to the <b>name</b> of a parcel element representing the corresponding administrative area.

### 3.34 AdministrativeDate

<b>Description</b>	The <b>AdministrativeDate</b> element captures a list of relevant administrative dates used in the jurisdictions' plan lodgement process. This element is used to record the date of survey for lodged plans in NSW. Plans disseminated from LRS may have another instance of this element, such as recording the date of registration of the plan.		
<b>Example</b>	<pre> ... &lt;SurveyHeader ... &gt;   ...   &lt;AdministrativeDate     adminDateType="Date Of Survey" adminDate="2013-10-02"/&gt;   ... &lt;/SurveyHeader&gt; ... </pre>		
<b>Parent Elements</b>	<i>SurveyHeader</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
adminDateType	<i>adminDateTypeType</i>	R	Jurisdictional list of the date types – see <i>adminDateTypeType</i> list in NSW enumerations schema "Date of Survey" is required for all surveyed plans "Date of Compilation" is required for all compiled plans
adminDate	date	R	Date according to the adminDateType in ISO 8601 format (yyyy-mm-dd). e.g. "2013-10-02"

### 3.35 PurposeOfSurvey

<b>Description</b>	The <b>PurposeOfSurvey</b> element describes the purpose of the survey.		
<b>Example</b>	<pre> ... &lt;SurveyHeader ... &gt;   ...   &lt;PurposeOfSurvey     name="Subdivision"/&gt;   ... &lt;/SurveyHeader&gt; ... </pre>		
<b>Parent Elements</b>	<i>SurveyHeader</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	<i>purpSurvType</i>	R	Jurisdictional list of purpose of survey types – see <i>purpSurvType</i> list in NSW enumerations schema e.g. "Subdivision", "Easement", etc.

### 3.36 Personnel

<b>Description</b>	The <b>Personnel</b> element captures information about the personnel who participated in the survey and the surveyor who endorsed the survey.		
<b>Example</b>	<pre> ... &lt;SurveyHeader ... &gt;   ...   &lt;Personnel     name="JOHN DOE" role="Signing Surveyor" regType="Registered"     regNumber="1004"/&gt;   ... &lt;/SurveyHeader&gt; ... </pre>		
<b>Parent Elements</b>	<i>SurveyHeader</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Full name of the surveyor as registered.
role	<i>surveyorRoleType</i>	O	Set to: "Signing Surveyor"
regType	<i>registrationType</i>	O	Set to: "Registered"
regNumber	string	O	Surveyor's board registration number

### 3.37 Annotation

<b>Description</b>	The <b>Annotation</b> element is used for rendering purposes in NSW and type of "Plans Used" is the only type that is compulsory.		
<b>Example</b>	<pre> ... &lt;SurveyHeader ... &gt; ...   &lt;Annotation     type="Plans Used" name="1"     desc="DP12345, DP378910, DP524789, C5697.2103"/&gt;   &lt;Annotation     type="Subdivision Number" name="s1" desc="015/14"/&gt;   &lt;Annotation     type="Plan Note" name="n1" desc="All areas shown are approximate"/&gt;   &lt;Annotation     type="Parcel Note" name="n2" desc="Limited to 20.195m in depth"     pclRef="1, 2, 3"/&gt;   &lt;Annotation     type="Diagram Lots" name="d1" desc="25, 43, 62, 85"/&gt;   &lt;Annotation     type="Diagram Occupations " name="d2" desc="25, 43, 62, 85"/&gt;   &lt;Annotation     type="Direction of Flow Non Tidal" name="f1" desc="58, 69"/&gt;   &lt;Annotation     type="Combined Scale Factor" name="c1" desc="0.999978"/&gt;   &lt;Annotation     type="LRS File Ref" name="r1" desc="2015M7100 (1404)Comp"/&gt; ... &lt;/SurveyHeader&gt; ... </pre>		
<b>Parent Elements</b>	<i>SurveyHeader</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
type	<i>annotationType</i>	R	<p>This is a category of annotations that are used in NSW – see <i>annotationType</i> list in NSW enumerations schema for full list of types that can be used in NSW.</p> <p>An Annotation could be based on the plan as a general statement, or specific to a parcel or number of parcels.</p> <p>e.g.</p> <ol style="list-style-type: none"> <li>AnnotationType "Plans Used" is used to record the plans used by the surveyor in preparing the plan and this is the only mandatory Annotation Type in NSW</li> <li>AnnotationType "Diagram", "Diagram Lots", "Diagram Secondary Interests", "Diagram Occupations" can be used to define the area to be in the sub-diagram on the rendering of the file</li> <li>AnnotationType "Subdivision Number" is used to record the subdivision certificate number for plan of subdivision, etc.</li> <li>AnnotationType "Plan Note" can be used to give information relating to whole of the plan, such as <code>desc="All areas shown are approximate"</code></li> <li>AnnotationType "Parcel Note" can be used for specific parcel(s) to give information relating to particular parcel(s), such as <code>desc="Limited to 20.195m in depth"</code></li> </ol>



			<p>6. AnnotationType "Direction of Flow Tidal" and "Direction of Flow Non Tidal" are used in rendering of 'flow direction arrow' in water course(s)</p> <p>7. AnnotationType "Combined Scale Factor" is used to render combined scale factor in the schedule of control (SCIMS) marks</p> <p>8. AnnotationType "LRS File Ref" is used to render LRS file (M-file) reference.</p> <p>9. AnnotationType "Scale" use in SP's</p>
name	string	R	This is the unique identifier for the Annotation and is used to cross reference and track the amendments.
desc	string	R	<p>This can be textual description or related <b>CgPoint@name</b> depends on <b>Annotation@type</b>.</p> <p>e.g.</p> <p>1. <b>Annotation@type="Parcel Note"</b> will have textual description such as "Limited to 20.195m in depth"  where as</p> <p>2. <b>Annotation@type="Diagram"</b> will have comma separated <b>CgPoint@name</b> such as "25, 43, 62, 85"</p>
pclRef	parcelNameRefs (string)	CR	<p>Required if the annotation refers to the parcel(s).</p> <p>The <b>pclRef</b> attribute allows referencing the annotation(s) to a specific parcel(s). A list of one or more comma separated <b>Parcel@name</b> are used.</p> <p>e.g. <b>Annotation@type="Parcel Note"</b> is likely to refer to particular parcel(s). For example, with <b>desc="Limited to 20.195m in depth"</b> and <b>pclRef="1, 2, 3"</b> can be used to inform that the depth limitation only applies to parcels 1, 2 and 3.</p>

### 3.38 FieldNote

<b>Description</b>	Notes are added as content of the <b>FieldNote</b> element. Plain text or any valid XML structure may be placed inside this element.		
<b>Example</b>	<pre> ... &lt;Survey&gt; ...   &lt;SurveyHeader ... &gt;     ...     &lt;FieldNote&gt; This is a field note &lt;/FieldNote&gt;     ...   &lt;/SurveyHeader&gt; ...   &lt;ObservationGroup ... &gt;     ...     &lt;ReducedObservation ... &gt;       &lt;FieldNote&gt;This is a field note&lt;/FieldNote&gt;     &lt;/ReducedObservation&gt;     &lt;ReducedArcObservation ... &gt;       &lt;FieldNote&gt;This is a field note&lt;/FieldNote&gt;     &lt;/ReducedArcObservation&gt;     &lt;RedHorizontalPosition ... &gt;       &lt;FieldNote&gt;This is a field note&lt;/FieldNote&gt;     &lt;/RedHorizontalPosition&gt;     &lt;RedVerticalObservation ... &gt;       &lt;FieldNote&gt;This is a field note&lt;/FieldNote&gt;     &lt;/RedVerticalObservation&gt;     ...   &lt;/ObservationGroup&gt; ... &lt;/Survey&gt; ... &lt;PlanFeatures... &gt; ...   &lt;PlanFeature ... &gt;     ...     &lt;FieldNote&gt; This is a field note &lt;/FieldNote&gt;     ...   &lt;/PlanFeature&gt; ... &lt;/PlanFeatures&gt; ... </pre>		
<b>Element Content</b>	Free text or any valid XML structure representing the field note information.		
<b>Parent Elements</b>	<i>SurveyHeader</i> <i>PlanFeature</i> <i>ReducedObservation</i> <i>ReducedArcObservation</i> <i>RedHorizontalPosition</i> <i>RedVerticalObservation</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
None (If custom XML is used, child elements of the custom XML will be shown.)			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
None			

### 3.39 ObservationGroup

<b>Description</b>	The <b>ObservationGroup</b> element is a container element for all types of observation elements.		
<b>Example</b>	<pre> ... &lt;Survey&gt; ...   &lt;ObservationGroup     id="OG-1"&gt; ...     &lt;ReducedObservation ... /&gt;     &lt;ReducedArcObservation ... /&gt;     &lt;RedHorizontalPosition ... /&gt;     &lt;RedVerticalObservation ... /&gt;   &lt;/ObservationGroup&gt; ... &lt;/Survey&gt; ... </pre>		
<b>Parent Elements</b>	<i>Survey</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>ReducedObservation</i>			0 - *
<i>ReducedArcObservation</i>			0 - *
<i>RedHorizontalPosition</i>			0 - *
<i>RedVerticalObservation</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
id	ID (string)	R	As LandXML allows multiple observation groups, each observation group has an "id". For ePlan there will be only one observation group per file. ID value should be unique within the file and must start with an alpha character and may not contain spaces.

### 3.40 ReducedObservation

<b>Description</b>	The <b>ReducedObservation</b> element contains a reduced horizontal measurement being the bearing and distance. The measurement is related to <b>CgPoint</b> elements using references to <b>InstrumentSetup</b> elements for the <b>setupID</b> and <b>targetSetupID</b> attributes. (See <i>InstrumentSetup</i> for details.)		
<b>Example</b>	<pre> ... &lt;ObservationGroup ...&gt; ...   &lt;ReducedObservation     name="15" desc="Connection"     setupID="IS14" targetSetupID="IS15"     azimuth="59.3032" horizDistance="324.525"     distanceType="Measured"     azimuthType="Measured"     distanceAdoptionFactor="1.00024000"     coordGeomRefs="LOT-103"&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt;   &lt;/ReducedObservation /&gt; ... &lt;/ObservationGroup&gt; ... </pre>		
<b>Parent Elements</b>	<i>ObservationGroup</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>FieldNote</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier.

desc	<i>purposeType</i>	R	<p>Jurisdictional list of the purpose types – see <i>purposeType</i> in NSW enumerations schema.</p> <p>This is the equivalent of a line type in NSW and values to be set as follows:</p> <p><b>Boundary:</b> all boundaries of new parcels with the exception of boundaries of new lots that abut a road and boundaries of new road parcels that abut a lot parcel of any state.</p> <p><b>Road:</b> boundaries of new lots that abut a road and boundaries of new road that abut a lot parcel of any state.</p> <p><b>Road Extent:</b> Boundaries of new road widening or splays abutting existing road parcels</p> <p><b>Reference:</b> Reference Mark connections from marks to the referencing corner</p> <p><b>Connection:</b> all other measured lines in the plan</p>
coordGeomRefs	coordGeomNameRefs (string)	O	A space delimited list of the <b>CoordGeom @ name</b> values this measurement is used in
setupID	IDREF (string)	R	A reference to the <b>InstrumentSetup @ id</b> that this measurement is made from
targetSetupID	IDREF (string)	R	A reference to the <b>InstrumentSetup @ id</b> that this measurement is made to
azimuth	direction (double)	CR	This is the bearing of <b>ReducedObservation</b> and required for all observations with exception of compiled residue parcel boundaries where bearing is optional <b>and boundaries in Strata Plans</b>
horizDistance	double	CR	This is the horizontal distance of <b>ReducedObservation</b> and required for all observations with exception of connections to Trig. stations
distanceType	<i>observationType</i>	CR	<p>Jurisdictional list of the observation types – see <i>observationType</i> in NSW enumerations schema.</p> <p>It is required if the method of observation is other than measured.</p>
azimuthType	<i>observationType</i>	CR	<p>Jurisdictional list of the observation types – see <i>observationType</i> in NSW enumerations schema.</p> <p>It is required if the method of observation is other than measured.</p>

distanceAccClass	distanceAccType	CR	Jurisdictional list of states for reference lines from survey marks– see <i>distanceAccType</i> in NSW enumerations schema.  This is the state of the reference line and It is required if the ReducedObservation@desc="Reference"
adoptedDistanceSurvey	string	CR	Required if the observation is adopted from a previous survey or for found marks (reference lines). Value is the plan number it was adopted from.  "Origin unknown" may be the value where applicable.
distanceAdoptionFactor	double	CR	This is the scale factor used for conversion between grid and ground distance. Ground distance should be given in the <i>horizDistance</i> .  It is required for connections between survey control marks.
vertDistance	double	CR	Used to record the height difference between Control Marks for the Height Difference Schedule required in CI 69 SSI Reg 2017
MSLDistance	HeightMethodType	CR	Used to record the surevy "Method" used to determine the Height difference between Control Marks for the Height Difference Schedule required in CI 69 SSI Reg 2017

### 3.41 ReducedArcObservation

<b>Description</b>	The <i>ReducedArcObservation</i> element contains a horizontal arc measurement. There can be multiple <i>ReducedArcObservation</i> over same two points as long as radii are different.		
<b>Example</b>	<pre> ... &lt;ObservationGroup ...&gt; ...   &lt;ReducedArcObservation     name="329" desc="Boundary"     setupID="S-132" targetSetupID="S-130"     chordAzimuth="124.3035" radius="930.570"     length="47.145" rot="cw"     arcType="Compiled" coordGeomRefs="XSTG12-1-1260"&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt;   &lt;/ReducedArcObservation /&gt; ... &lt;/ObservationGroup&gt; ... </pre>		
<b>Parent Elements</b>	<i>ObservationGroup</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>FieldNote</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier

desc	<i>purposeType</i>	R	<p>Jurisdictional list of the purpose types – see <i>purposeType</i> in NSW enumerations schema.</p> <p>This is the equivalent of a line type in NSW and values to be set as follows:</p> <p><b>Boundary:</b> all boundaries of new parcels with the exception of boundaries of new lots that abut a road and boundaries of new road parcels that abut a lot parcel of any state.</p> <p><b>Road:</b> boundaries of new lots that abut a road and boundaries of new road that abut a lot parcel of any state.</p> <p><b>Road Extent:</b> Boundaries of new road widening or splays abutting existing road parcels</p> <p><b>Connection:</b> all other measured lines in the plan</p> <p><b>Reference:</b> Not used for arcs</p>
coordGeomRefs	coordGeomNameRefs (string)	O	A space delimited list of the <b>CoordGeom @ name</b> values this measurement is used in
setupID	IDREF (string)	R	A reference to the <b>InstrumentSetup @ id</b> that this measurement is made from
targetSetupID	IDREF (string)	R	A reference to the <b>InstrumentSetup @ id</b> that this measurement is made to
chordAzimuth	direction (double)	R	The chord bearing of the arc and it is required for all observations including compiled parcels
radius	double	R	Radius of the arc and it is required for all observations including compiled parcels
length	double	R	Length of the arc and it is required for all observations including compiled parcels
rot	<i>clockwise</i>	R	Direction of the arc from the <b>setupID</b> to the <b>targetSetupID</b> . Value will be either "cw" for clockwise or "ccw" for counter clockwise
arcType	<i>observationType</i>	CR	<p>Jurisdictional list of the observation types – see <i>observationType</i> in NSW enumerations schema.</p> <p>It is required if the method of observation is other than measured.</p>
adoptedSurvey	string	CR	Required if the observation is adopted from a previous survey, this is the identity (e.g. plan number) of the survey it was adopted from

### 3.42 RedHorizontalPosition

<b>Description</b>	The <b>RedHorizontalPosition</b> element contains horizontal details of the survey control marks in the plan. For all established control marks (with <b>class="D"</b> or better & <b>order="3"</b> or better), details must match SCIMS database.		
<b>Example</b>	<pre> ... &lt;ObservationGroup ...&gt; ...   &lt;RedHorizontalPosition     name="172475" setupID="S-31"     latitude="6363006.080" longitude="373418.490"     class="U" order="U" currencyDate="2015-07-27"     horizontalFix="Traverse" horizontalDatum="MGA"&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt;   &lt;/RedHorizontalPosition/&gt; ... &lt;/ObservationGroup&gt; ... </pre>		
<b>Parent Elements</b>	<i>ObservationGroup</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>FieldNote</i>			0 - *
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier.
setupID	IDREF (string)	R	A reference to the <b>InstrumentSetup</b> @ <b>id</b> where the point is a survey control point.  There must be at least one <b>ReducedObservation</b> associated with same id.
horizontalDatum	<i>horzDatumType</i>	R	Jurisdictional list of the horizontal datum types – see <i>horzDatumType</i> in NSW enumerations schema.
latitude	string	R	SCIMS northing coordinate for the control mark
longitude	string	R	SCIMS easting coordinate for the control mark.
horizontalFix	<i>horzFixType</i>	R	Jurisdictional list of the horizontal fix types – see <i>horzDatumType</i> in NSW enumerations schema.  This is the method used to determine the position of the mark and it should be "SCIMS" for all established marks. Different methods can be used for unestablished marks.  Police 3 plans will record "Policy 3"
currencyDate	string	R	This is the date the survey control mark information was obtained from SCIMS or by other method in ISO 8601 format (yyyy-mm-dd). e.g. "2014-06-13"
class	<i>horzClassType</i>	R	Jurisdictional list of the horizontal class types – see <i>horzClassType</i> in NSW enumerations schema.  This must match order in SCIMS database for found established marks.
order	<i>horzOrderType</i>	R	Jurisdictional list of the horizontal order types – see <i>horzOrderType</i> in NSW enumerations schema.  This must match order in SCIMS database for found marks.

### 3.43 RedVerticalObservation

<b>Description</b>	<p>The <b>RedVerticalObservation</b> element contains vertical information of the survey control marks in the plan. For all established control marks, details must match SCIMS database.</p> <p>These are in additional information to the details provided for the control mark in the <b>RedHorizontalPosition</b> Section above.</p> <p><b>The additional information is only mandatory for plans defining stratum boundaries that use a survey control mark as one of the required bench marks</b></p>		
<b>Example</b>	<pre> ... &lt;ObservationGroup ...&gt;   ...   &lt;RedVerticalObservation     name="172475" setupID="S-31"     height="20.200" verticalDatum="AHD"     class="LC" order="L3"&gt;     &lt;FieldNote&gt; ... &lt;/FieldNote&gt;   &lt;/RedVerticalObservation/&gt;   ... &lt;/ObservationGroup&gt; ... </pre>		
<b>Parent</b>	<i>ObservationGroup</i>		
<b>Child elements</b>		<b>Cardinality</b>	
<i>FieldNote</i>		0 - *	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
name	string	R	Unique ePlan identifier
setupID	IDREF (string)	R	<p>A reference to the <b>InstrumentSetup @ id</b> where the point is a survey control point.</p> <p>There must be a <b>RedHorizontalPosition</b> with same <b>setupID</b>.</p>
height	double	R	This is the reduced level value for the control mark.
verticalDatum	<i>vertDatumType</i>	R	<p>Jurisdictional list of the vertical datum types – see <i>vertDatumType</i> in NSW enumerations schema.</p> <p>This is the vertical datum used for the <b>height</b> and it is set to: <b>AHD</b> in NSW.</p>
class	<i>vertClassType</i>	R	<p>Jurisdictional list of the vertical class types – see <i>vertClassType</i> in NSW enumerations schema.</p> <p>This must match class in SCIMS database for found established marks</p>
order	<i>vertOrderType</i>	R	<p>Jurisdictional list of the vertical order types – see <i>vertOrderType</i> in NSW enumerations schema.</p> <p>This must match order in SCIMS database for found marks.</p>



verticalFix	vertFixType	CR	Height Datum Validation for Height Schedule for marks that have an accurate AHD value, <b>Notes.</b> - The single mark adopted to define the height datum for the survey is to be described as "SCIMS adopted" and the mark or marks used to validate the height datum adopted are to be described as "from SCIMS-datum validation". - Enumeration of "Null" will provide blank in the Height Datum Validation table next to heights determined for marks placed/found by the survey.
date	date	CR	The date on which the AHD values were obtained from SCIMS- <b>Note can only be one date</b>

### 3.44 InstrumentSetup

<b>Description</b>	The <b>InstrumentSetup</b> element links observation setup points to a <b>CgPoint</b> . This is purely a structural requirement of LandXML to link observation start and end points to a physical location. See example below.		
<b>Example</b>	<pre> ... &lt;Survey&gt;   ...   &lt;InstrumentSetup     id="S-4" stationName="4" instrumentHeight="0"&gt;     &lt;InstrumentPoint ... /&gt;   &lt;/InstrumentSetup&gt;   ... &lt;/Survey&gt; ... </pre>		
<b>Parent Elements</b>	<i>Survey</i>		
<b>Child Elements</b>	<b>Cardinality</b>		
<i>InstrumentPoint</i>	1		
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
id	ID	R	ID value should be unique within the document. Must start with an alpha character and may not contain spaces.
stationName	string	R	Required by LandXML but optional for ePlan.
instrumentHeight	double	R	Required by LandXML but optional for ePlan. If not needed should be Set to: 0

### 3.45 InstrumentPoint

<b>Description</b>	The <b>InstrumentPoint</b> element contains the reference to the <b>CgPoint</b> for the <b>InstrumentSetup</b> .		
<b>Example</b>	<pre> ... &lt;InstrumentSetup ... &gt;   &lt;InstrumentPoint pntRef="4"/&gt; &lt;/InstrumentSetup&gt; ... </pre>		
<b>Parent Elements</b>	<i>InstrumentSetup</i>		
<b>Child Elements</b>			<b>Cardinality</b>
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
pntRef	pointNameRef	R	Reference to the <b>CgPoint</b> for this <b>InstrumentPoint</b> .

### 3.46 Amendment

<b>Description</b>	The <b>Amendment</b> element is used to record amendments made to the file. This element would not normally be used by the surveyor creating the file, but by LRS to record a post registration amendment requested by the surveyor or required by LRS. The information recorded in this element will be shown on the rendering of the LXML done by LRS.		
<b>Example</b>	<pre> &lt; LandXML ... &gt; ...   &lt;Amendment     dealingNumber="Amendment File 2013-1174"     amendmentDate="2013-08-26"     comments="Connections to easement E5 in lot 6 amended from 0.5 to     0.6"&gt;     &lt;AmendmentItem ... /&gt;   &lt;/Amendment&gt; ... &lt;/LandXML&gt; </pre>		
<b>Parent Elements</b>	<i>LandXML</i>		
<b>Child Elements</b>			<b>Cardinality</b>
<i>AmendmentItem</i>		1 - *	
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
dealingNumber	string	CR	This is the LRS amendment file No
amendmentDate	date	R	The date that the amendment was made.
comments	string	R	Description of the amendment e.g. "Connections to easement E5 in lot 6 amended from 0.5 to 0.6"

### 3.47 AmendmentItem

<b>Description</b>	The <b>AmendmentItem</b> element contains name of each element that has been amended. It is only recorded in the LXML file and will not be shown on the plan when rendered.		
<b>Example</b>	<pre> ... &lt;Amendment ... &gt;   &lt;AmendmentItem     elementName=" ReducedObservation 244"/&gt; ... &lt;/Amendment&gt; ... </pre>		
<b>Parent Elements</b>	<i>Amendment</i>		
<b>Child Elements</b>		<b>Cardinality</b>	
None			
<b>Attribute</b>	<b>Type</b>	<b>Required</b>	<b>Description</b>
elementName	string	R	The name of the element being amended. e.g. If a <b>ReducedObservation</b> element is amended then the value of <b>elementName</b> is <b>ReducedObservation @ name</b> in the file.


DRAFT

## 4. COMPLEX SCENARIO DESCRIPTIONS

This section of the document specifies LXML structural requirements that are to be used in the construction of a CIF where necessary to handle scenarios that require LXML to be structured in a certain way to correctly capture the data. It also explains in NSW specific terms some of the scenarios described in the ICSM National level document titled – “ePlan Protocol LandXML Structural Requirements”

### 4.1 Multipart Lots

Multipart lots consist of multiple parts linked to form a single cadastral entity. This is achieved using one parcel with a **parcelType** of "multipart" with linkages to several parcels with a **parcelType** of "part".

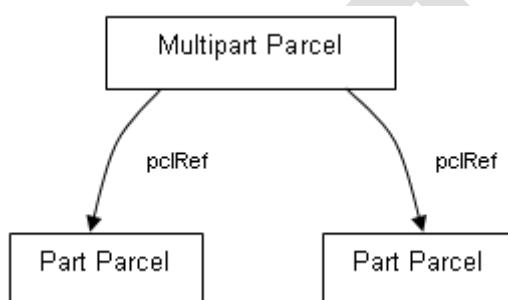

**Figure 1 – Multipart parcel structure**

A multipart lot has the following structural features:

- The "multipart" parcel contains parcel linkages to all the "part" parcels.
- The "multipart" parcel does not contain the **CoordGeom** and **Center** elements. Only the "part" parcels contain coordinate geometry.
- The "multipart" parcel specifies the total area in its **area** attribute. All part parcels must specify their respective area in their **area** attribute.
- For a lot with multiple parts, the “multipart” parcel name is the lot number and the “part” lot parcel name is the lot number followed by a an alpha suffix starting with “A”.

For example, if Lot 101 has two parts the parcel name of the multipart parcel is “101” and two part parcels are “101A” and “101B”.

**NB:** the suffix is required in LandXML file as each name should be unique, however the lot number is rendered as Pt 101.

The following is an example implementation of a multipart parcel in LandXML file. The element names are arbitrary and used for demonstration purposes only.

```
<Parcel name="101" class="Lot" state="proposed" parcelType="Multipart" parcelFormat="Standard" area="6685">
  <!-- Linkage to parts -->
  <Parcels>
    <Parcel name="A" pclRef="101A"/>
    <Parcel name="B" pclRef="101B"/>
  </Parcels>
</Parcel>
```

```

<Parcel name="101A" class="Lot" state="proposed" parcelType="Part" parcelFormat="Standard"
area="1206">
  <Center ... />
  <CoordGeom ... >
    ...
  </CoordGeom>
</Parcel>
<Parcel name="101B" class="Lot" state="proposed" parcelType="Part" parcelFormat="Standard"
area="5479">
  <Center ... />
  <CoordGeom ... >
    ...
  </CoordGeom>
</Parcel>

```

## 4.2 Subdivision Number

The Subdivision Number issued by the Council in the Subdivision Certificate is also recorded on the plan drawing sheet. This is recorded in the LXML file by the use of the Annotation element.

Surveyor: Date of Survey: Surveyor's Ref:	PLAN OF SUBDIVISION OF LOT IN DP	L.G.A.: Locality: Subdivision No: SC/14/2010/529/1 Lengths are in metres. Reduction Ratio: 100	Registered:   D.P.
---	-------------------------------------	---	-----------------------------

```

<SurveyHeader ... >
  <Annotation type="Subdivision Number" name="s1" desc="SC/14/2010/529/1"/>
  ...
</SurveyHeader>

```

## 4.3 Plan Note

To apply a note (annotation) to a plan that is about the whole plan you use the **Annotation** Element as a child of the **SurveyHeader** element with **Annotation@type="Plan Note"**. See example below.

```

<SurveyHeader ... >
  <Annotation type="Plan Note" name="n1" desc="All areas are approximate"/>
  ...
</SurveyHeader>

```

## 4.4 Parcel Note

To apply a note (annotation) to a specific parcel or number of parcels you use the **Annotation** Element as a child of the **SurveyHeader** element with **Annotation@type="Parcel Note"**. See example below.

```

<SurveyHeader ... >
  <Annotation type="Parcel Note" name="n2" desc="Unformed Road" pclRef="R1, R2"/>
  ...
</SurveyHeader>

```


## 4.5 Line Note

To apply a note to a specific line you use the FieldNote element as a child of the ReducedObservation element. See following examples:

- Showing a dimension as “by me”

```
<ReducedObservation name="75" desc="Connection" setupID="IS84" targetSetupID="IS83"
azimuth="189.04" horizDistance="6.320">
  <FieldNote>by me</FieldNote>
</ReducedObservation>
```

- Showing measurements between occupations

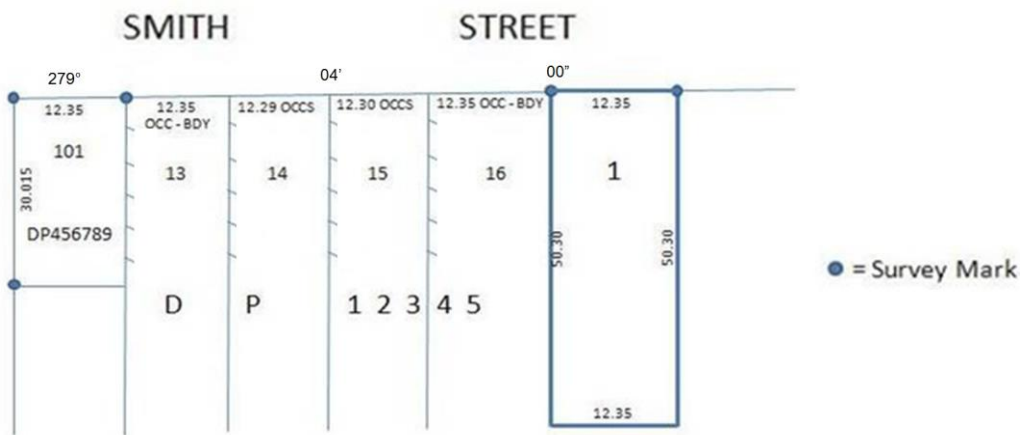

```
...
<ReducedObservation name="75" desc="Connection" setupID="IS84" targetSetupID="IS83"
azimuth="279.04" horizDistance="12.35">
  <FieldNote>OCC-BDY</FieldNote>
</ReducedObservation>
<ReducedObservation name="76" desc="Connection" setupID="IS83" targetSetupID="IS82"
azimuth="279.04" horizDistance="12.30">
  <FieldNote>OCCS</FieldNote>
</ReducedObservation>
...
```

## 4.6 Control marks used as reference marks

A Control Mark (PM, SSM, etc.) can also be used as a reference mark. This is recorded by using following convention in LXML:

```
At CgPoint;
<CgPoint name="3" state="existing" pntSurv="control" oID="168718">6110668.110000
534471.312000</CgPoint>

At ReducedObservation;
<ReducedObservation name="30" desc="Reference" setupID="IS3" targetSetupID="IS2"
azimuth="265.3700" horizDistance="3.945" distanceAccClass="Placed"/>

At RedHorizontalPosition;
<RedHorizontalPosition name="61" setupID="IS3" latitude="6263432.521" longitude="287064.951"
class="C" order="3" currencyDate="2014-01-29" horizontalFix="SCIMS" horizontalDatum="MGA"/>
```

```
At Monument;  
<Monument name="10" pntRef="3" type="SSM" state="Found"/>
```

#### 4.7 “Not Marked” boundary corners

Where a surveyor does not place a boundary mark (such as a peg) at the corner of a new lot, they are required to record the corner as "Not Marked" and place a reference mark in a suitable location remote from the corner.

In order to record a corner which is "Not Marked", **CgPoint** and **Monument** elements should be populated as per below example.

```
At CgPoint;  
<CgPoint state="proposed" pntSurv="boundary" name="79">6390231.696689  
741645.430913</CgPoint>  
  
At Monument;  
<Monument name="27" pntRef="79" type="Not Marked" state="Not Marked" condition="Inaccessible"/>
```

#### 4.8 RM gone

##### 4.8.1 with boundary mark

Where a surveyor finds or places a boundary mark (such as a peg) on a corner of an adjoining or proposed parcel and there was a RM that was connected to the same corner which is now gone, they are required to record boundary mark information as well as RM gone.

In order to record this information, **CgPoint** and **Monument** elements should be populated as per below example.

```
At CgPoint;  
<CgPoint state="existing" pntSurv="boundary" name="79">6390231.696689 741645.430913</CgPoint>  
  
At Monument;  
<Monument name="2" pntRef="16" type="Peg" state="Found" desc="RM Gone (DP220102)"/>
```

##### 4.8.2 without boundary mark

###### New lot corners

Where surveyor cannot place a boundary mark on a new lot corner and there was a RM that was connected to the same corner which is now gone, they must record the corner as "Not Marked" and place a reference mark in a suitable location remote from the corner as per section 4.7 of this document. They must also record RM gone in the file.

In order to record this information, **CgPoint** and **Monument** elements should be populated as per below example.

```
At CgPoint;  
<CgPoint state="proposed" pntSurv="boundary" name="79">6390231.696689  
741645.430913</CgPoint>  
  
At Monument;  
<Monument name="2" pntRef="16" type="Not Marked" state="Not Marked" condition="Inaccessible"  
desc="RM Gone (DP220102)"/>
```

Where there is no boundary mark on an adjoining lot corner and there was a RM that was connected to the same corner which is now gone, they must record RM gone detail on the corner it was referencing.

In order to record this information, **CgPoint** and **Monument** elements should be populated as per below example.

```

At CgPoint;
<CgPoint state="existing" pntSurv="boundary" name="79">6390231.696689
741645.430913</CgPoint>

At Monument;
<Monument name="2" pntRef="16" state="Gone" desc="RM Gone (DP220102)"/>
    
```

#### 4.9 Plans Used

The list of plans used by the surveyor in the preparation of the plan is recorded using the **Annotation@type** of "Plans Used" in the NSW enumerations schema. Plan numbers or names are recorded in a comma delimited list in the **Annotation@desc** attribute. See example below.

```

<SurveyHeader ...>
  <Annotation type="Plans Used" name="1" desc="DP378910, DP524789, 5697.2103"/>
  ...
</SurveyHeader>
    
```


**NB:** This is a mandatory element required for all plans.

#### 4.10 Irregular Lines

Irregular line boundaries such as creeks, etc. are defined differently depending on if the plan is surveyed or compiled.

##### 4.10.1 Surveyed plans

For surveyed plans, the irregular line boundary (e.g. natural boundary) of a lot is to be defined using **IrregularLine** element and the traverse information in LandXML. The **IrregularLine** element is for the rendering of the legal boundary together with the description of the feature (e.g. Right bank of Pioneer River) and the traverse information is for mathematical closure of the lot and will be rendered separately in a short right lines table to represent a traverse along the boundary.

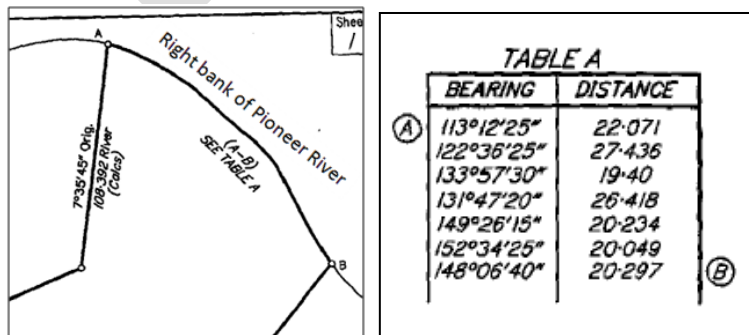

Diag. Surveyed Irregular line boundary

#### IrregularLine element



The shape of the irregular line is visualized using the `PntList2d` element under `IrregularLine` element in LXML using a set of northing and easting coordinate pairs

The information used to render the irregular line and description of the boundary is as follows:

- `IrregularLine@desc` records the location of the legal boundary (e.g. "Right bank of Pioneer Creek")
- The `Start` and `End` points (`pntRefs`) of the irregular line should be from `CgPoints`
- The coordinate pairs of the points representing the irregular line between the `Start` and `End` points. The first and last pairs of coordinates in the list must match the `CgPoint` coordinates of `Start` and `End` points.

**NB:** Some of the coordinate pairs in the list can be same as the `CgPoint` coordinates that are used in traverse

```
<IrregularLine desc="Right bank of Pioneer River" >
  <Start pntRef="217"/>
  <End pntRef="234"/>
  <PntList2D>1322.137070 897.047360 1315.916630 896.467670 1310.226980 897.991240
  1303.757680 903.401480 1294.458130 911.729520 1206.212380 967.435920 1195.584230
  974.819390 1188.710850 975.722460 1183.368710 976.036190 1177.116210 974.874520
  1170.836800 971.127850 1162.738330 965.201400 1157.406840 961.661120 1153.054100
  958.694270 1289.443320 915.970390 1274.394860 931.130970 1268.003170
  937.445250</PntList2D>
</IrregularLine>
```

## Traverse

Bearings and distances of traverses are recorded using `ReducedObservation` element under the `ObservationGroup` element and all points used in the traverse must be in the `CgPoints` element and have corresponding `InstrumentSetup` elements. The start and end point of the traverse must match the `Start@pntRef` and `End@pntRef` of the corresponding `IrregularLine` and have `CgPoint@pntSurv` of "boundary". All other intermediate points in the traverse must have `CgPoint@pntSurv` of "natural boundary". See example below

```
At CgPoints;
<CgPoints zoneNumber="56">
  ...
  <CgPoint name="217" state="proposed" pntSurv="boundary">1322.137070 897.047360</CgPoint>
  <CgPoint name="234" state="proposed" pntSurv="boundary">1268.003170 937.445250</CgPoint>
  ...
  <CgPoint name="221" state="proposed" pntSurv="natural boundary">1310.226980
  897.991240</CgPoint>
  <CgPoint name="222" state="proposed" pntSurv="natural boundary">1188.710850
  975.722460</CgPoint>
  <CgPoint name="223" state="proposed" pntSurv="natural boundary">1183.368710
  976.036190</CgPoint>
  <CgPoint name="224" state="proposed" pntSurv="natural boundary">1177.116210
  974.874520</CgPoint>
  ...
</CgPoints>
```

### At InstrumentSetup;

```
...
<InstrumentSetup id="S-217" stationName="217" instrumentHeight="0">
  <InstrumentPoint pntRef="217" />
</InstrumentSetup>
<InstrumentSetup id="S-221" stationName="221" instrumentHeight="0">
  <InstrumentPoint pntRef="221" />
</InstrumentSetup>
...
<InstrumentSetup id="S-224" stationName="226" instrumentHeight="0">
  <InstrumentPoint pntRef="226" />
</InstrumentSetup>
<InstrumentSetup id="S-234" stationName="234" instrumentHeight="0">
  <InstrumentPoint pntRef="234" />
</InstrumentSetup>
...
```

All traverse observations should have **ReducedObservation@desc** of "Connection"

### At ObservationGroup;


```
<ObservationGroup id="OG-1">
  ...
  <ReducedObservation name="11" setupID="S-217" targetSetupID="S-221" azimuth="234.5140"
  horizDistance="13.235" desc="Connection"></ReducedObservation>
  <ReducedObservation name="12" setupID="S-221" targetSetupID="S-222" azimuth="324.5120"
  horizDistance="12.320" desc="Connection"></ReducedObservation>
  ...
  <ReducedObservation name="13" setupID="S-223" targetSetupID="S-224" azimuth="54.5145"
  horizDistance="15.450" desc="Connection"></ReducedObservation>
  <ReducedObservation name="14" setupID="S-224" targetSetupID="S-234" azimuth="144.5115"
  horizDistance="21.105" desc="Connection"></ReducedObservation>
  ...
</ObservationGroup>
```

## 4.10.2 Compiled plans

For compiled plans, the irregular line boundary (e.g. natural boundary) of a lot is to be defined using **IrregularLine** element only. See IrregularLine element under section 4.10.1 for example.

## 4.10.3 Defining Adjoining Hydrographic Parcels

To create a river (or any other water feature) as an adjoining parcel, following attributes under Parcel element should be populated as per example below. This is applicable to both Surveyed and Compiled plans.

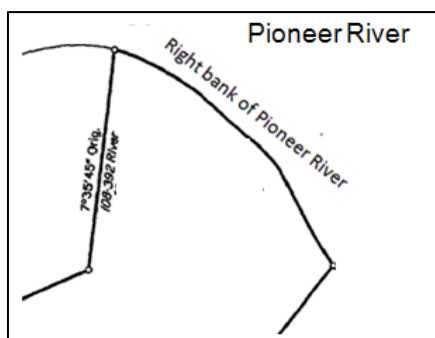

```
<Parcel name="H1" class="Hydrography"
desc="Pioneer Creek" state="adjoining"
parcelFormat="Standard" useOfParcel="River"
```

Diag. Compiled **IrregularLine** boundary with River as adjoining parcel

## 4.11 PlanFeatures

**PlanFeatures** element in LXML is used for diagrammatic features of the plan such as occupations, offsets, other features, etc. Hence, the features can be exaggerated for better visual representation, if required. The points (**CgPoint**) used to create the feature should have **pntSurv** of “sideshot” unless it is an actual boundary or reference point.


### 4.11.1 Occupations

Occupations generally have geometry (shape), description and offsets. Geometry and the description of an occupation are defined in **PlanFeature** element and all the points used in the geometry definition should have corresponding **CgPoint** elements. Offsets are generally defined using **Monument** element but it can also be defined using **PlanFeature** element in some cases.


In a special case where the occupation is a wall on the boundary the **Line@desc** attribute is also need to be populated with “Face of Wall” of the corresponding parcel geometry line.

In NSW, only the following five types of features can be used and these are only to differentiate the rendering style.

- Building : hatching inside a line



- Wall : hatching between a set of parallel lines



Wall only




Boundary in Wall




Wall on Boundary

**NB:** Boundary in Wall must indicate where the boundary is at two end points using **Monuments** element

- Fence : hatching between the broken line



Off Boundary




On Boundary

**NB:** There is slight difference in hatching between on and off boundary Fence

- Kerb : broken line



- Offset : renders only desc attribute between given two points



See following example for how each elements/attributes are populated in LXML for occupations.

All points (**CgPoint**) used to create occupations including the occupation of a point nature such as 'centre of a fence post' should be in the **CgPoints** element.

#### At CgPoints;

```
<CgPoints zoneNumber="56">
...
<CgPoint name="11" state="proposed" pntSurv="boundary">1322.137070 897.047360</CgPoint>
<CgPoint name="12" state="existing" pntSurv="boundary">1268.003170 937.445250</CgPoint>
...
<CgPoint name="35" state="existing" pntSurv="boundary">1310.226980 897.991240</CgPoint>
<CgPoint name="36" state="existing" pntSurv="boundary">1188.710850 975.722460</CgPoint>
...
<CgPoint name="3" state="existing" pntSurv="sideshot">1183.368710 976.036190</CgPoint>
<CgPoint name="4" state="existing" pntSurv="sideshot">1177.116210 974.874520</CgPoint>
<CgPoint name="5" state="existing" pntSurv="sideshot">1153.054100 958.694270</CgPoint>
<CgPoint name="6" state="existing" pntSurv="sideshot">1289.443320 915.970390</CgPoint>
<CgPoint name="7" state="existing" pntSurv="sideshot">1197.135371 977.322490</CgPoint>
<CgPoint name="8" state="existing" pntSurv="sideshot">1185.846230 964.612050</CgPoint>
<CgPoint name="9" state="proposed" pntSurv="boundary">1235.561320 944.719420</CgPoint>
...
</CgPoints>
```

**Monuments** element is generally used for mark details but it can also be used for occupation offset information. When it is used for this purpose, **type** attribute must be "Occupation".



#### At Monuments;

```
<Monuments>
...
<!--one occupation with offsets to two roads near intersection (see diagrams on next page) -->
<Monument name="30" pntRef="5" type="Occupation" state="Found" desc="1.00 Clear Smith Rd,
0.05 Clear Fred St"/>
...
<!--offsets from the occupation of a point nature (see diagrams on next page) -->
<Monument name="31" pntRef="9" type="Occupation" state=" Found " desc="Cen. Old SFP 0.24N
0.09E"/>
...
<!--offsets from the occupation of a point nature (see diagrams on page 60) -->
<Monument name="32" pntRef="3" type="Occupation" state=" Found " desc="(0.05)"/>
...
<!--offsets from the occupation of a point nature (see diagrams on page 60) -->
<Monument name="33" pntRef="6" type="Occupation" state=" Found " desc="0.04 OFF BDY"/>
...
</Monuments>
```

## How it will be rendered

## What it means

Offsets to two Roads near intersection

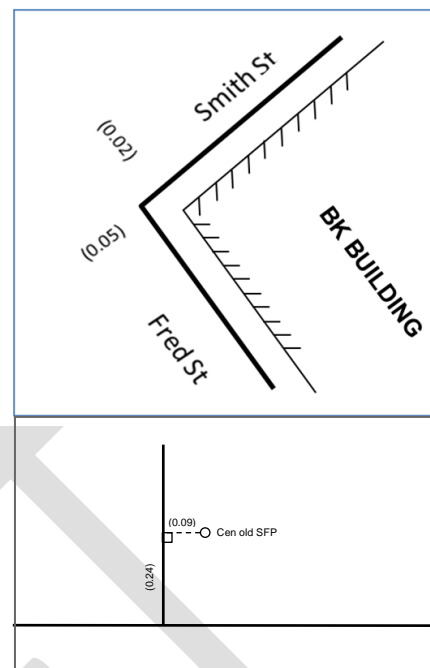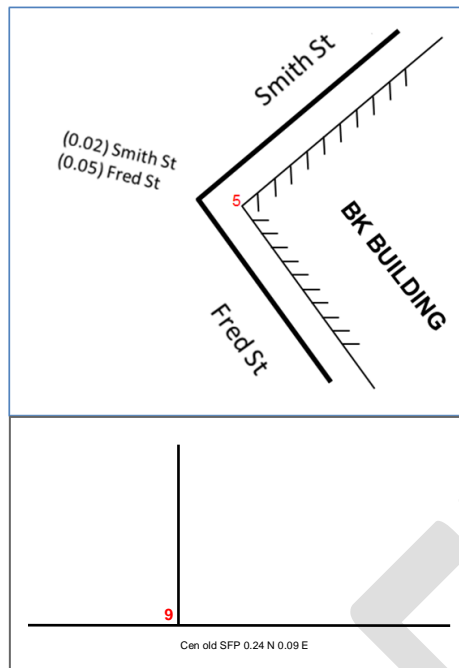

Occupation of point nature

**PlanFeatures** element is where each occupation is defined as an individual **PlanFeature** element with its geometry definition and the description of what the feature (occupation) is. The **name** attribute of a **PlanFeature** determines the rendering style. If there are two or more of same type features, numeric suffix must be used to give them the unique identity.

### At PlanFeatures;

```

<PlanFeatures name="Occupation">
  <PlanFeature name="Fence1" desc="20 YO FENCE ON BDY">
    <CoordGeom name="F1">
      <Line>
        <Start pntRef="11"/>
        <End pntRef="12"/>
      </Line>
    </CoordGeom>
  </PlanFeature>
  <PlanFeature name="Wall1" desc="Bk Wall">
    <CoordGeom name="W1">
      <Line>
        <Start pntRef="35"/>
        <End pntRef="36"/>
      </Line>
    </CoordGeom>
  </PlanFeature>
  <PlanFeature name="Kerb1" desc="Kerb Line">
    <CoordGeom name="K1">
      <Line>
        <Start pntRef="7"/>
        <End pntRef="8"/>
      </Line>
    </CoordGeom>
  </PlanFeature>

```

11 20 YO FENCE ON BDY 12

35 Bk Wall 36

7 Kerb Line 8



Cont'd to next page

Cont'd from last page

```

<PlanFeature name="Building1" desc="DBL BK HOUSE">
  <CoordGeom name="B1">
    <Line>
      <Start pntRef="3"/>
      <End pntRef="4"/>
    </Line>
    <Line>
      <Start pntRef="4"/>
      <End pntRef="5"/>
    </Line>
    <Line>
      <Start pntRef="5"/>
      <End pntRef="6"/>
    </Line>
    <Line>
      <Start pntRef="6"/>
      <End pntRef="3"/>
    </Line>
  </CoordGeom>
</PlanFeature>
<PlanFeature name="Offset1" desc="(3.66)">
  <!--desc can also have (KL-BDY 3.66), (3.66 CNR Bk), etc. -->
  <CoordGeom name="O1">
    <Line>
      <Start pntRef="12"/>
      <End pntRef="7"/>
    </Line>
  </CoordGeom>
</PlanFeature>
</PlanFeatures>

```

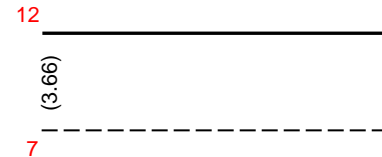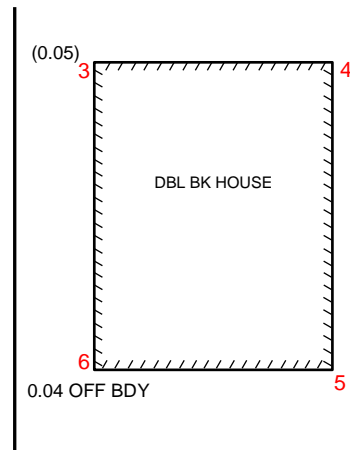

**NB:** To facilitate rendering of occupations within LXML file the coordinate geometry must be sequenced as if walking along the occupation feature with the hatching representing the substance of the occupation always on the right hand side of the occupation line being defined

In a case where the occupation is a wall on the boundary **Line@desc** attribute under Parcel element must be populated as per below example.

At Parcel;

```

<Parcel name="12" area="495.0" class="Lot" state="proposed" parcelFormat="Standard"
parcelType="Single">
  <Center pntRef="LC-137"/>
  <CoordGeom name="XSTG12-1-1205">
    ...
    <Line>
      <Start pntRef="34"/>
      <End pntRef="35"/>
    </Line>
    <Line desc="Face of Wall">
      <Start pntRef="35"/>
      <End pntRef="36"/>
    </Line>
    <Line>
      <Start pntRef="36"/>
      <End pntRef="37"/>
    </Line>
    ...
  </CoordGeom>
</Parcel>

```

**NB:**

- When using the **PlanFeature@name** of "Wall" or "Fence" the **CoordGeom** will represent the center line of the wall/fence.
- When using the **PlanFeature@name** of "Building" or "Kerb" the **CoordGeom** will represent the outside face of the building's wall or face of Kerb


#### 4.11.2 Other Types of Plan Features

Other types of plan features such as "Dam", "Cliff", "Watercourse" etc. can be created using one of the five feature types (**PlanFeature@name**) from previous section. Type should be selected to match the appropriate line style for rendering and for the description of the actual feature, **PlanFeature@desc** attribute should be used.

##### Examples


1. Use Building to render a Cliff

`<PlanFeature name="Building" desc="Top edge of cliff">`

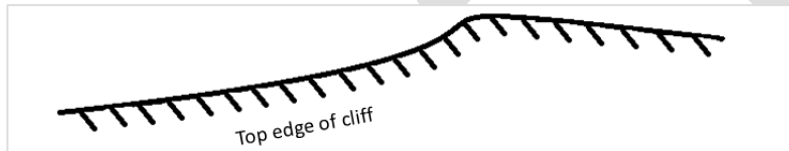

2. Use Kerb to render a Dam

`<PlanFeature name="Kerb" desc="Dam">`




3. Use Kerb to render a Tree

`<PlanFeature name="Kerb" desc="Oak Tree">`



4. Use Kerb to render a Creek


`<PlanFeature name="Kerb" desc="Creek">`

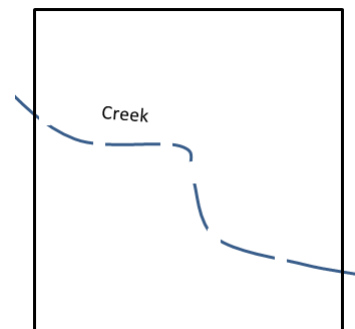

**NB:** If there is an irregular line in the shape of the watercourse the **IrregularLine** element should be used in the **CoordGeom** of the **PlanFeature**

#### 4.12 Easements over track in use or line of pipes (Approx. position)

These easements are defined using **IrregularLine** element as per section 4.10 of this document. See following example for how each elements/attributes are populated in LXML for the easement below.

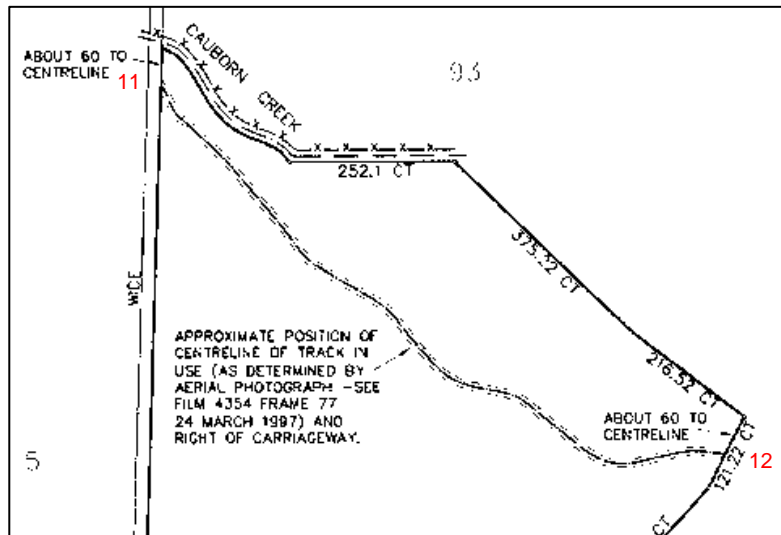

##### At CgPoints;

```
<CgPoints zoneNumber="56">
...
<CgPoint name="11" state="proposed" pntSurv="boundary">1322.137070 897.047360</CgPoint>
<CgPoint name="12" state="proposed" pntSurv="boundary">1268.003170 937.445250</CgPoint>
...
</CgPoints>
```

##### At Parcel;

```
<Parcel name="E1" class="Easement" state="proposed" parcelFormat="Standard" parcelType="Single"
desc="Right of Carriageway over track in use">
  <Center pntRef="LC-137"/>
  <CoordGeom name="E1">
    <IrregularLine desc="Approximate position of centreline of track in use" source="as determined by
    Aerial photograph – see film 4354 frame 77, 24 March 1997">
      <Start pntRef="11"/>
      <End pntRef="12"/>
      <PntList2D>1322.137070 897.047360 1315.916630 896.467670 1310.226980 897.991240
      1303.757680 903.401480 1294.458130 911.729520 1206.212380 967.435920 1195.584230
      974.819390 1188.710850 975.722460 1183.368710 976.036190 1177.116210 974.874520
      1170.836800 971.127850 1162.738330 965.201400 1157.406840 961.661120 1153.054100
      958.694270 1289.443320 915.970390</PntList2D>
    </IrregularLine>
  </CoordGeom>
</Parcel>
```



### 4.13 Transmission line easements defined by centre line traverse

These easements have two parts and they are defined separately in LXML.

- The centerline traverse : This is defined as an unclosed easement parcel.
- The extremity boundaries : This is defined as a plan feature.

See following example for how each elements/attributes are populated in LandXML for the easement below.



#### The centreline traverse

##### At CgPoints;

```
<CgPoints zoneNumber="56">
```

...

```
<CgPoint name="33" state="proposed" pntSurv="boundary">1322.137070 897.047360</CgPoint>
```

```
<CgPoint name="34" state="proposed" pntSurv="boundary">1268.003170 937.445250</CgPoint>
```

...

```
</CgPoints>
```

##### At Parcel;

```
<Parcel name="E3" class="Easement" state="proposed" parcelFormat="Standard" parcelType="Single" desc="Easement for Transmission Line 25 Wide - Defined by traverse of centreline of poles ">
```

```
<Center pntRef="LC-17"/>
```

```
<CoordGeom name="E3">
```

```
<Line>
```

```
<Start pntRef="33"/>
```

```
<End pntRef="34"/>
```

```
</Line>
```

```
</CoordGeom>
```

```
</Parcel>
```

### At InstrumentSetup;

```
...
<InstrumentSetup id="S-33" stationName="33" instrumentHeight="0">
  <InstrumentPoint pntRef="33" />
</InstrumentSetup>
<InstrumentSetup id="S-34" stationName="34" instrumentHeight="0">
  <InstrumentPoint pntRef="34" />
</InstrumentSetup>
...
```

### At ObservationGroup;

```
<ObservationGroup id="OG-1">
  ...
  <ReducedObservation name="21" setupID="S-34" targetSetupID="S-33" azimuth="8.0030"
    horizDistance="644.35" desc="Boundary"></ReducedObservation>
  ...
</ObservationGroup>
```

## The extremity boundaries

### At CgPoints;

```
<CgPoints zoneNumber="56">
  ...
  <CgPoint name="A" state="proposed" pntSurv="sideshot">1183.368710 976.036190</CgPoint>
  <CgPoint name="B" state="proposed" pntSurv="sideshot">1177.116210 974.874520</CgPoint>
  <CgPoint name="C" state="proposed" pntSurv="sideshot">1153.054100 958.694270</CgPoint>
  <CgPoint name="D" state="proposed" pntSurv="sideshot">1289.443320 915.970390</CgPoint>
  ...
</CgPoints>
```

### At PlanFeatures;

```
<PlanFeatures name="Occupation">
  ...
  <PlanFeature name="Kerb E3" desc="DNR Transmission line easement boundary">
    <CoordGeom name="E3Bdy">
      <Line>
        <Start pntRef="A"/>
        <End pntRef="B"/>
      </Line>
      <Line>
        <Start pntRef="B"/>
        <End pntRef="C"/>
      </Line>
      <Line>
        <Start pntRef="C"/>
        <End pntRef="D"/>
      </Line>
      <Line>
        <Start pntRef="D"/>
        <End pntRef="A"/>
      </Line>
    </CoordGeom>
  </PlanFeature>
  ...
</PlanFeatures>
```

#### **N.B.**

Any description with prefix 'DNR' will not be rendered from Rendering Service


#### 4.14 Definition of easement segments

##### New Easements

Where a new easement extends over multiple lots, this easement must be segmented and defined as separate easement parcels, one for each lot that it affects.

The easement parcel names (**Parcel@name**) are to be E1, E2, E3, etc. but they must have same parcel description (**Parcel@desc**). This will ensure all the parts of the easement parcels with same descriptions to be combined within the one designation as per below diagram.


Full dimensions are required for all proposed easement parcels including all '(x)' marked easement boundaries.

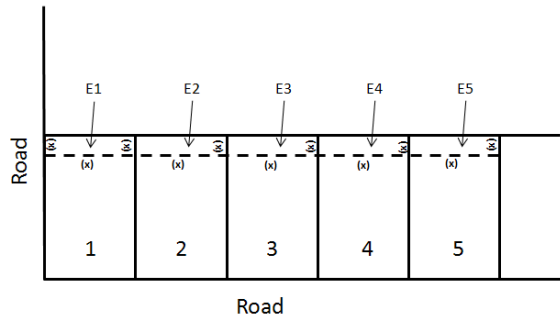

E1-E5 Easement to Drain Water 2 Wide

##### Existing Easements

Where an existing easement extends over multiple lots it is not necessary to segment the easement parcel or show dimensions.

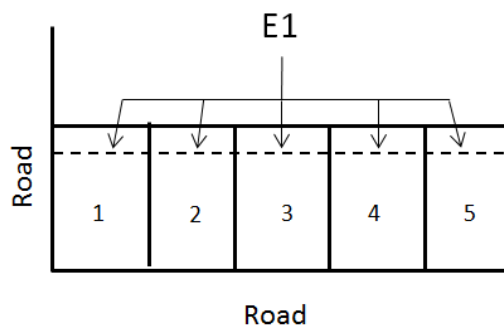


E1 - Easement to Drain Water 2 Wide – DP123456

#### 4.15 Administrative area boundaries

Where a plan crosses over multiple administrative areas such as LGA, Parish, etc., the administrative areas are defined as unclosed parcels. This method also applies to any partial parcel where the parcel cannot be shown in full either because of size or its extent is unknown.

Typically for administrative area boundaries there will be two Administrative Area parcels separated by a common boundary. These types of parcels need at least one line and a Center to identify on which side of the line the parcel is located.

The example shown below is where a plan covers 2 LGA's

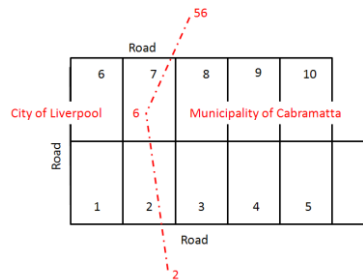

Where there are multiple administrative area types that coincide with the same dividing boundary e.g. when both Locality and LGA are different on both sides, the parcel name can combine their names e.g. name = "City Of Hay - locality of Como". The useOfParcel will be set to "Administrative Area". However there will still be a separate Administrative Area element required for each one

```

At Parcels;
<Parcels>
...
<Parcel name="City of Liverpool" class="Administrative Area" state="existing" parcelType="Single"
parcelFormat="Standard" useOfParcel="Local Government Area">
  <Center pntRef="LC-13"/>
  <CoordGeom name="LGA-1">
    <Line>
      <Start pntRef="56"/>
      <End pntRef="6"/>
    </Line>
    <Line>
      <Start pntRef="6"/>
      <End pntRef="2"/>
    </Line>
  </CoordGeom>
</Parcel>
<Parcel name="Municipality of Cabramatta" class="Administrative Area" state="existing"
parcelType="Single" parcelFormat="Standard" useOfParcel="Local Government Area">
  <Center pntRef="LC-14"/>
  <CoordGeom name="LGA-2">
    <Line>
      <Start pntRef="2"/>
      <End pntRef="6"/>
    </Line>
    <Line>
      <Start pntRef="6"/>
      <End pntRef="56"/>
    </Line>
  </CoordGeom>
</Parcel>
...

```

## 4.16 Defining diagrams (enlargements) in NSW LXML

The rendering service will provide the ability to self-nominate diagrams, including diagrams that render only specific information in the specified area. If there are no self-nominated diagrams, diagrams will be auto generated by the service.

The **Annotation** elements are used to define the self-nominated diagrams. To define the area to be shown as diagram, **Annotation@desc** attribute is used with reference to **CgPoint@name** values. The **Annotation@type** defines the type of diagrams which include the following “*annotationType*” enumerations

- “Diagram”  
: Render all information in the area defined by the **Annotation@desc**
- “Diagram Lots”  
: Render all information relating to lots only
- “Diagram Occupations”  
: Render all information relating to occupations and line work only for lots
- “Diagram Secondary Interests”  
: Render all information relating to secondary interests (e.g. easements) and line work only for lots.

See following example for how each elements/attributes are populated in LandXML to define self-nominate diagrams.

*At SurveyHeader;*

<SurveyHeader ...>

...

```
<Annotation type="Diagram" name="D1" desc="D-11, D-12, D-13, D-14"/>
<Annotation type="Diagram Secondary Interests" name="D2" desc="D-21, D-22, D-23, D-24"/>
<Annotation type="Diagram Occupations" name="D3" desc="D-31, D-32, D-33, D-34"/>
<Annotation type="Diagram" name="D4" desc="D-41, D-42, D-43, D-44"/>
<Annotation type="Diagram Lots" name="D5" desc="34, 33, 80, 83, 84, 69"/>
<Annotation type="Diagram Occupations" name="D6" desc="34, 33, 80, 83, 84, 69"/>
<Annotation type="Diagram Secondary Interests" name="D7" desc="34, 33, 80, 83, 84, 69"/>
```

...

</SurveyHeader>

**NB:** The **CgPoint** used to define the extent of the diagram can be any points that are already in the file or can be points that are created solely for the purpose of defining the diagram area. For all the **CgPoint** solely for extent of the diagram only should be defined as per below.

*At CgPoints;*

<CgPoints ...>

...

```
<CgPoint name="D-11" state="proposed" pntSurv="sideshot">303.305400 980.661530</CgPoint>
<CgPoint name="D-12" state="proposed" pntSurv="sideshot">303.305400 886.032160</CgPoint>
<CgPoint name="D-13" state="proposed" pntSurv="sideshot">276.163110 886.032160</CgPoint>
<CgPoint name="D-14" state="proposed" pntSurv="sideshot">276.163110 980.661530</CgPoint>
<CgPoint name="D-21" state="proposed" pntSurv="sideshot">293.706738 991.056130</CgPoint>
```

...

</ CgPoints>

## 4.17 Adding Direction of Flow arrow in water course

The Direction of Flow arrow can be added in LXML using the **Annotation@type** of “Direction Of Flow Tidal” or “Direction Of Flow Non Tidal”. This will allow the rendering service to render the appropriate type of arrow next to a water course. The reference (link) to the water course is done using the **desc** attribute, which is to be populated with the **Start** and **End** points of the corresponding **IrregularLine** element.

There are 2 relevant annotation types and the type of arrow will be as per below;

1. “Direction Of Flow Non Tidal” will produce a straight arrow.



2. “Direction Of Flow Tidal” will produce an “S” shaped arrow.



See following example for how each elements/attributes are populated in LandXML.

*At IrregularLine;*

```
...  
<IrregularLine desc="Right Bank of Hawkesbury River" >  
  <Start pntRef="11"/>  
  <End pntRef="14"/>  
  <PntList2D>.....</PntList2D>  
</IrregularLine>
```

```
...  
<IrregularLine desc=" Bank of Georges River" >  
  <Start pntRef="21"/>  
  <End pntRef="24"/>  
  <PntList2D>.....</PntList2D>  
</IrregularLine>
```

...

*At SurveyHeader;*

```
<SurveyHeader ...>
```

```
  ...  
  <Annotation type="Direction Of Flow Tidal" name="F1" desc="11, 14"/>  
  <Annotation type="Direction Of Flow Non Tidal" name="F2" desc="21, 24"/>  
  ...  
</SurveyHeader>
```


**NB:** The flow arrow will always render from first point to second point in the **desc** attribute regardless of **Start** and **End** of **IrregularLine**.

## 4.18 Defining Reserved Roads

When a reserved road is excluded from a lot, it should be created in the LXML file as a separate road parcel. It must have a **class** of “Reserved Road”

The boundaries of the Reserved Road do not require **ReducedObservation** and will be rendered as broken lines. If any boundary of the reserved road coincides with another parcel boundary of any other class, the line work of other parcel class will take precedence at the rendering.

See following example for how each elements/attributes should be populated in LandXML for given example.

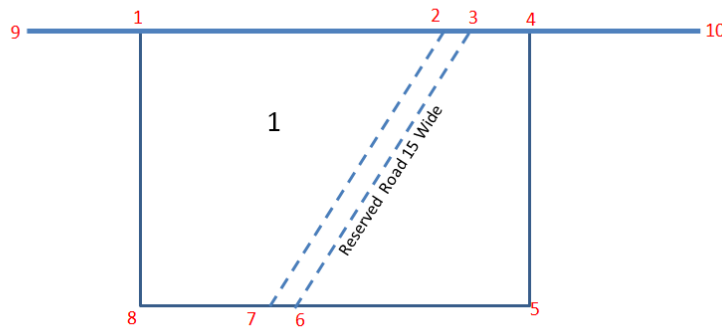


*At Parcel;*

```

<Parcel name="R11" desc="Reserved Road 15 Wide" class="Reserved Road" state="existing"
parcelFormat="Standard" parcelType="Single">
  <Center pntRef="LC-47"/>
  <CoordGeom name="R11-1">
    <Line>
      <Start pntRef="2"/>
      <End pntRef="3"/>
    </Line>
    <Line>
      <Start pntRef="3"/>
      <End pntRef="6"/>
    </Line>
    <Line>
      <Start pntRef="6"/>
      <End pntRef="7"/>
    </Line>
    <Line>
      <Start pntRef="7"/>
      <End pntRef="2"/>
    </Line>
  </CoordGeom>
</Parcel>

```

If any of the Reserved Road parcel boundaries coincide with a proposed lot boundary that has a **ReducedObservation** (boundary from point 8 to point 1 below), the **ReducedObservation@desc** should be "Boundary" and not "Road".

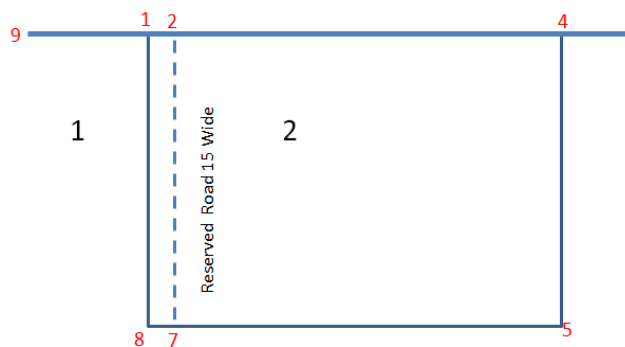


## 4.19 Defining Reference Mark (RM)

Reference marks in LXML are defined in two levels. One is using Monument element to define physical mark information and the other is to define the information in regard actual observation to referencing corner.

### 4.19.1 RM(s) referencing single corner

In most situations, there will be a double up of information in Monument and ReducedObservation elements in regard to the state of the mark and the observation (see Example 1 below). There are also cases where this information does not agree between the two elements (see Example 2 below).

Example 1: Two reference marks (points 1 & 2) were found referencing a corner 'L' (point 10) and agree with DP1171493 which is also the origin of the mark. Another mark (point 3) was placed to reference corner 'AD' (point 11).

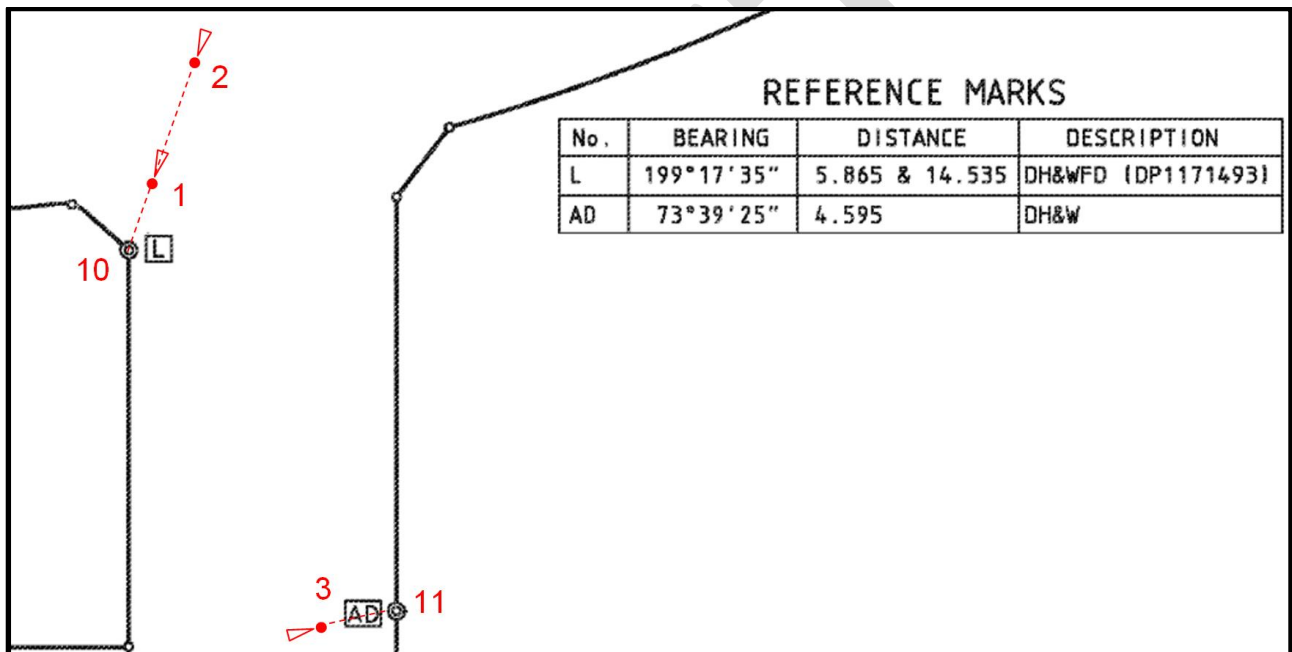

See following for how each elements/attributes should be populated in LXML for given example.

*At CgPoints;*

```
<CgPoints zoneNumber="56">
```

...

```
<CgPoint name="1" state="existing" pntSurv="reference">6110676.619 534466.481</CgPoint>
```

```
<CgPoint name="2" state="existing" pntSurv="reference">6110676.317 534462.548</CgPoint>
```

```
<CgPoint name="3" state="proposed" pntSurv="reference">6110668.110 534471.312</CgPoint>
```

...

```
<CgPoint name="10" state="proposed" pntSurv="boundary">6110671.235 534463.458</CgPoint>
```

```
<CgPoint name="11" state="proposed" pntSurv="boundary">6110665.137 534452.181</CgPoint>
```

...

```
</CgPoints>
```




*At ObservationGroup;*

```
<ObservationGroup id="OG-1">
...
<ReducedObservation name="19" desc="Reference" setupID="IS1" targetSetupID="IS10"
azimuth="199.1735" horizDistance="5.865" distanceAccClass="Found"
adoptedDistanceSurvey="DP1171493"/>
<ReducedObservation name="20" desc="Reference" setupID="IS2" targetSetupID="IS10"
azimuth="199.1735" horizDistance="14.535" distanceAccClass="Found"
adoptedDistanceSurvey="DP1171493"/>
<ReducedObservation name="21" desc="Reference" setupID="IS3" targetSetupID="IS11"
azimuth="73.3925" horizDistance="4.595" distanceAccClass="Placed"/>
...
</ObservationGroup>
```

*At Monuments;*

```
<Monuments>
...
<Monument name="21" pntRef="1" type="DH&W" state="Found" originSurvey="DP1171493"/>
<Monument name="22" pntRef="2" type="DH&W" state="Found" originSurvey="DP1171493"/>
<Monument name="23" pntRef="3" type="DH&W" state="Placed"/>
...
</Monuments>
```

Example 2: There are two reference marks (points 1 & 2) were found referencing a corner at point 31 but has been re-referenced by the survey and does not agree with the origin (DP247735) of the mark.

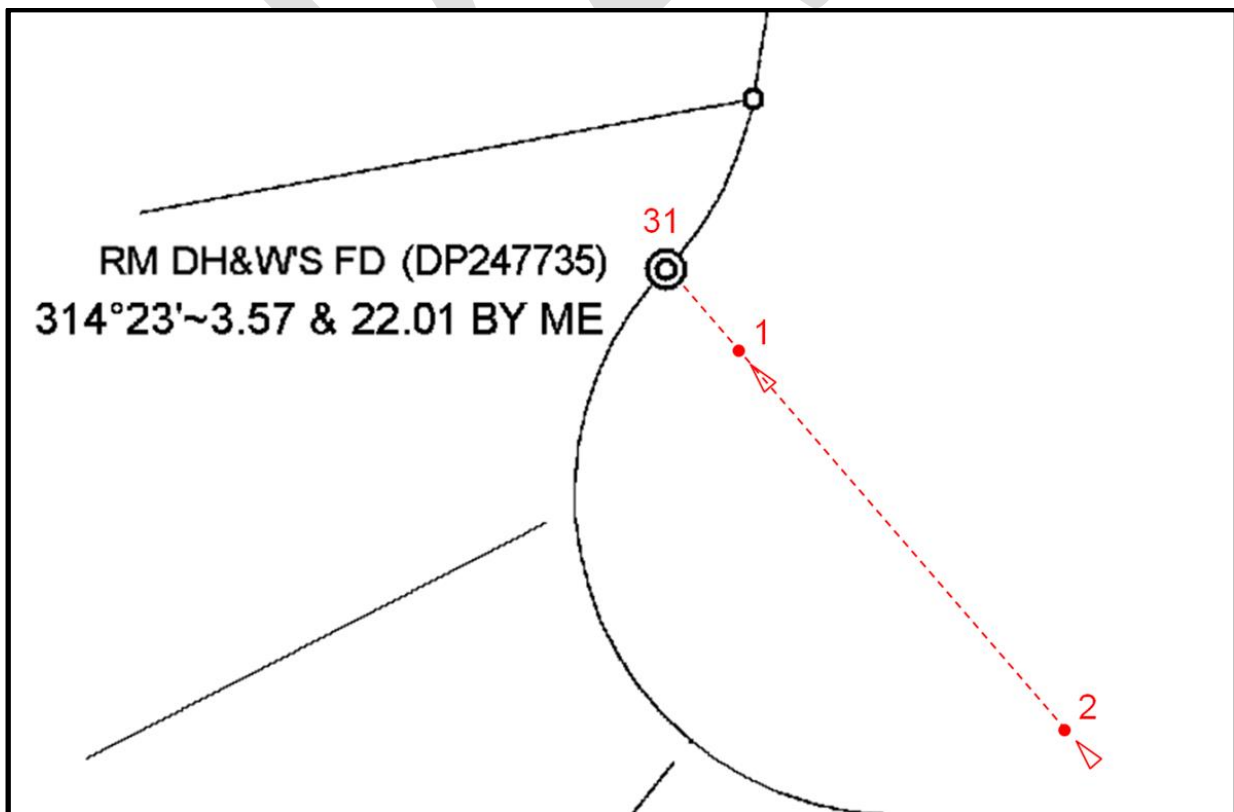

See following for how each elements/attributes should be populated in LandXML for given example.

*At CgPoints;*

```
<CgPoints zoneNumber="56">
...
<CgPoint name="1" state="existing" pntSurv="reference">6110676.619 534466.481</CgPoint>
<CgPoint name="2" state="existing" pntSurv="reference">6110676.317 534462.548</CgPoint>
...
<CgPoint name="31" state="proposed" pntSurv="boundary">6110671.235 534463.458</CgPoint>
...
</CgPoints>
```

*At Monuments;*

```
<Monuments>
...
<Monument name="21" pntRef="1" type="DH&amp;W" state="Found" originSurvey ="DP247735"/>
<Monument name="22" pntRef="2" type="DH&amp;W" state="Found" originSurvey ="DP247735"/>
...
</Monuments>
```

*At ObservationGroup;*


```
<ObservationGroup id="OG-1">
...
<ReducedObservation name="19" desc="Reference" setupID="IS1" targetSetupID="IS31"
azimuth="314.2000" horizDistance="3.570" distanceAccClass="Found By Me"
adoptedDistanceSurvey="DP247735"/>
<ReducedObservation name="20" desc="Reference" setupID="IS2" targetSetupID="IS31"
azimuth="314.2000" horizDistance="22.010" distanceAccClass="Found By Me"
adoptedDistanceSurvey="DP247735"/>
...
</ObservationGroup>
```

#### 4.19.2 When one mark references multiple corners

There have been many occasions where one physical mark is used to reference multiple corners at different times of survey. When a single mark is used to define multiple corners with different attribute values, it must be defined as follow.

1. Attributes of the physical mark will be populated in the Monument element.
2. The reference information will be populated in the ReducedObservation of each reference lines

Example: Two reference lines shown in red box below are actually connected to same reference mark, which is shown as a circle with wings. Connection to the left corner was surveyed and agrees to the found origin (DP1074678), whereas connection to the right corner is new reference using same mark.

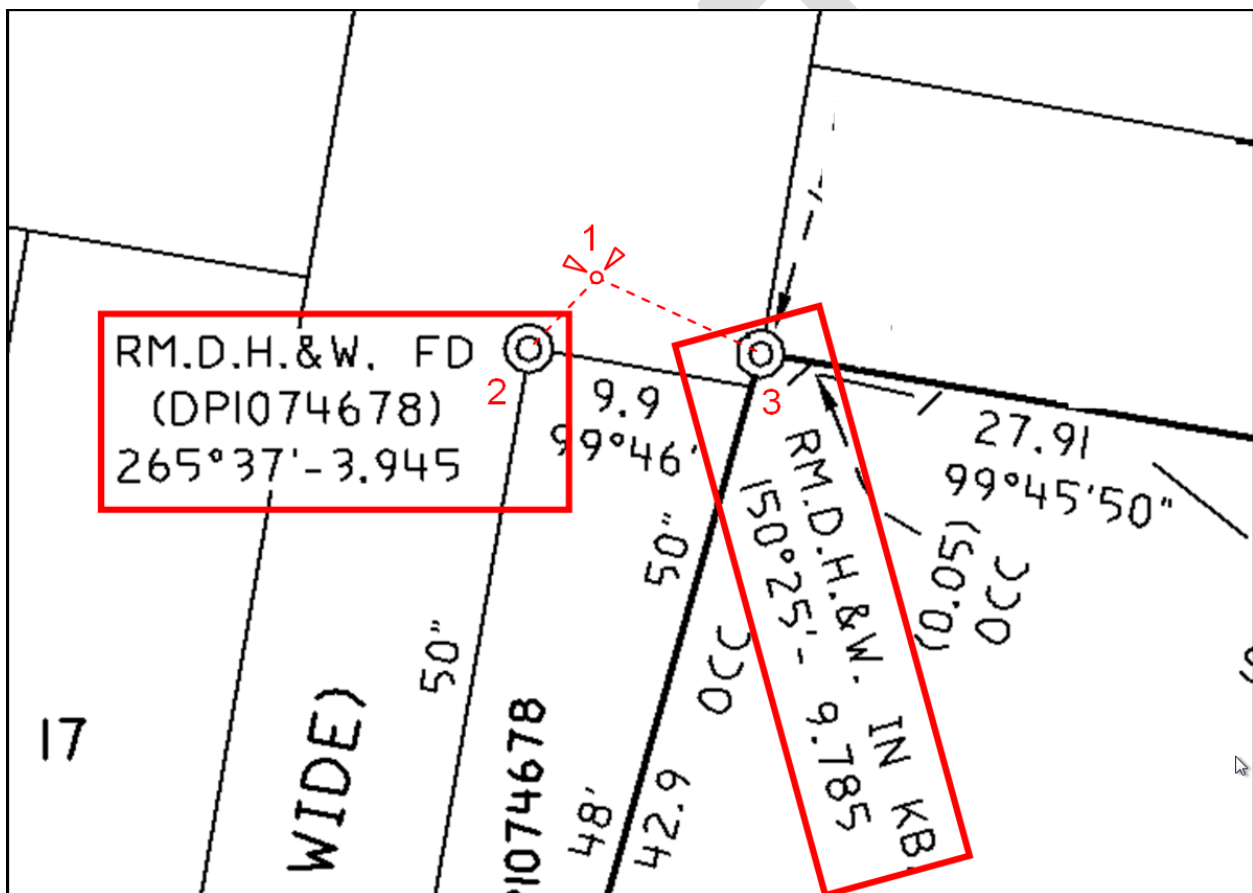

See following for how each elements/attributes should be populated in LandXML for given example.

```
At CgPoints;  
<CgPoints zoneNumber="56">  
...  
<CgPoint name="1" state="existing" pntSurv="reference">6110676.619 534466.481</CgPoint>  
<CgPoint name="2" state="existing" pntSurv="boundary">6110676.317 534462.548</CgPoint>  
<CgPoint name="3" state="proposed" pntSurv="boundary">6110668.110 534471.312</CgPoint>  
...  
</CgPoints>
```

### At ObservationGroup;

```
<ObservationGroup id="OG-1">
  ...
  <ReducedObservation name="30" desc="Reference" setupID="IS1" targetSetupID="IS2"
    azimuth="265.3700" horizDistance="3.945" distanceAccClass="Found"
    adoptedDistanceSurvey="DP1074678"/>
  <ReducedObservation name="31" desc="Reference" setupID="IS1" targetSetupID="IS3"
    azimuth="150.2500" horizDistance="9.785" distanceAccClass="Placed"/>
  ...
</ObservationGroup>
```

### At Monuments;


```
<Monuments>
  ...
  <Monument name="10" pntRef="1" type="DH&amp;W" state="Found" originSurvey="DP1074678"/>
  ...
</Monuments>
```

**NB:** The state attribute under Monument element is the physical state of the mark and the distanceAccClass attribute under ReducedObservation element is the state of the individual reference line. When these attributes are either "Found" or "Found By Me", the Monument@originSurvey attribute and ReducedObservation@adoptedDistanceSurvey attributes should be populated accordingly.

## 4.20 Defining the area 'Benefited to the Part' using Designated Area

When only part of the lot is being benefited by a secondary interest such as an easement, it is required to designate the area being benefited. The area being designated must be created as a separate parcel with a Parcel@class="Designated Area".

See next page for how each elements/attributes should be populated in LXML for example below.

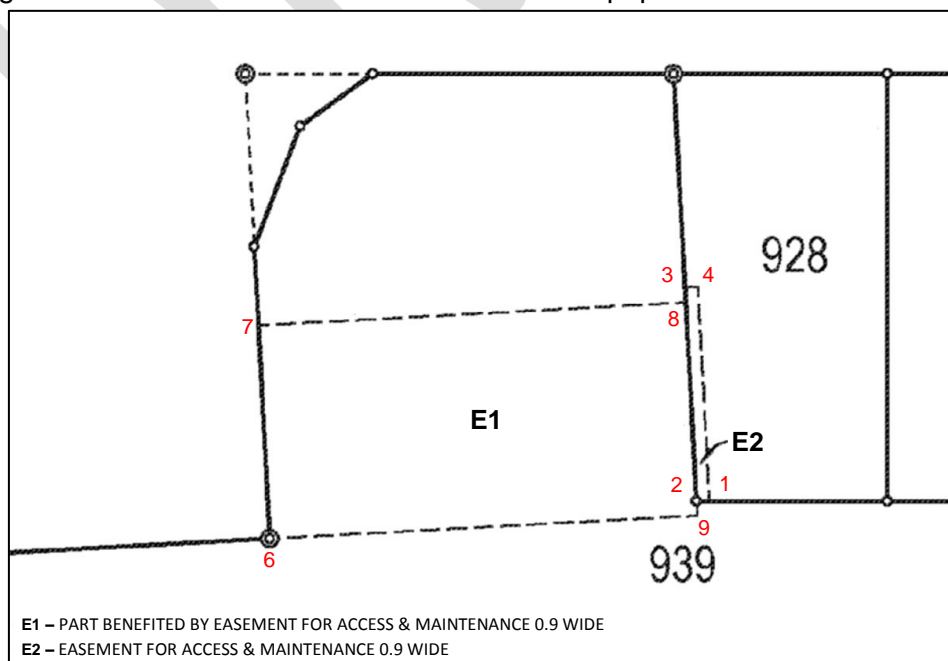

### At Parcels;

<Parcels>

...

<Parcel name="E1" desc="Part Benefited by Easement for Access and Maintenance 0.9 Wide" class="Designated Area" state="proposed" parcelType="Single" parcelFormat="Standard">

<Center pntRef="LC-14"/>

<CoordGeom name="LGA-2">

<Line>

<Start pntRef="6"/>

<End pntRef="7"/>

</Line>

<Line>

<Start pntRef="7"/>

<End pntRef="8"/>

</Line>

<Line>

<Start pntRef="8"/>

<End pntRef="9"/>

</Line>

<Line>

<Start pntRef="9"/>

<End pntRef="6"/>

</Line>

</CoordGeom>

</Parcel>

<Parcel name="E2" desc="Easement for Access and Maintenance 0.9 Wide" class="Easement" state="proposed" parcelType="Single" parcelFormat="Standard">

<Center pntRef="LC-13"/>

<CoordGeom name="LGA-1">

<Line>

<Start pntRef="1"/>

<End pntRef="2"/>

</Line>

<Line>

<Start pntRef="2"/>

<End pntRef="3"/>

</Line>

<Line>

<Start pntRef="3"/>

<End pntRef="4"/>

</Line>

<Line>

<Start pntRef="4"/>

<End pntRef="1"/>

</Line>

</CoordGeom>

</Parcel>


...

</Parcels>

## 4.21 Defining the Line PEG

When there is a Line PEG on a boundary, this can be defined using **Monument** element as per the other types of boundary marks. The difference with the Line PEG is that this point will not be part of the Coordinate Geometry of a parcel and have a **CgPoint@pntSurv="traverse"**. Instead there should be a connection to the Line PEG in the **ReducedObservation** element.

See following for how each elements/attributes should be populated in LandXML for example below.

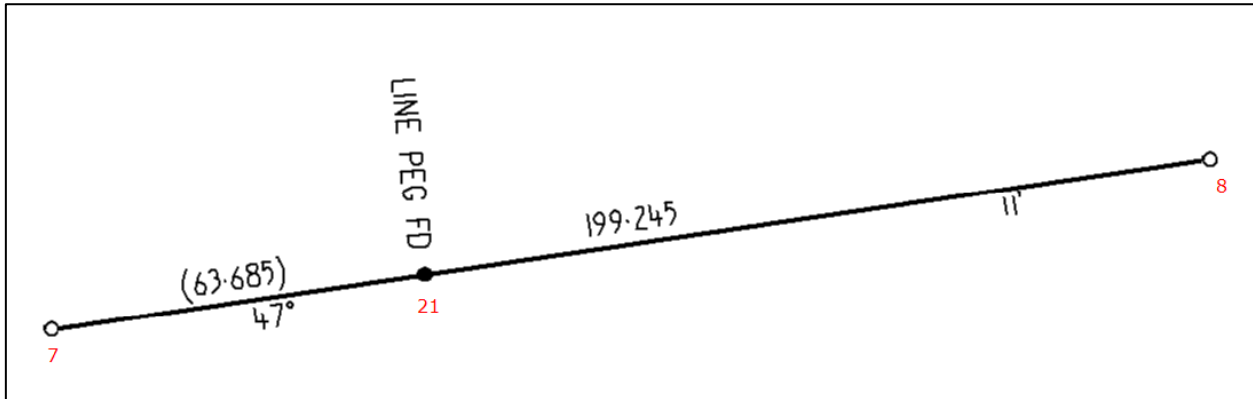

### At CgPoints;

```
<CgPoints zoneNumber="56">
...
<CgPoint name="7" state="existing" pntSurv="boundary">6110676.619 534466.481</CgPoint>
<CgPoint name="8" state="existing" pntSurv="boundary">6110696.317 534659.548</CgPoint>
...
<CgPoint name="21" state="existing" pntSurv="traverse">6110683.110 534521.312</CgPoint>
...
</CgPoints>
```

### At ObservationGroup;

```
<ObservationGroup id="OG-1">
...
<ReducedObservation name="3" desc="Boundary" setupID="IS7" targetSetupID="IS8"
azimuth="47.1100" horizDistance="199.245"/>
...
<ReducedObservation name="31" desc="Connection" setupID="IS7" targetSetupID="IS21"
azimuth="47.1100" horizDistance="63.685"/>
...
</ObservationGroup>
```

### At Monuments;

```
<Monuments>
...
<Monument name="18" pntRef="21" type="PEG" desc="LINE PEG" state="Found"/>
...
</Monuments>
```

## 4.22 Defining Obstructed Boundary Corner

When a boundary point is obstructed and is not able to be marked it is recorded as an “Obstructed boundary corner” in accordance with Clause 28(3)(b) SSI Reg, 2017. This is recorded by adding a Monument element for the relevant CgPoint with a Monument@state=“Not Marked Obstructed” and Monument@type=“Not Marked” see example below

```
<CgPoint name="1" state="proposed" pntSurv="boundary">6255430.07689 315017.37412 88.3</CgPoint>  
<Monument name="4" pntRef="1" type="Not Marked" state="Not Marked Obstructed"/>
```

This will generate a solid circle on the corner point when rendered in the Rendering service.

## 4.23 New road parcels abutting existing or other new road parcels

See diagrams below:

Road Widening and Splays: R3, R4 and R5 are existing adjoining road parcels  
R1 and R2 are new (Proposed) Road parcels

The boundary lines of new lots 1 and 2 that abut existing road parcels R3 and R5 and new road widening parcels R1 and R2 get a ReducedObservation@desc=“Road” –This will flag the marking requirements of the Regs and render the line as a solid line

The boundary lines of the new road widening parcels R1 and R2 that abut existing road parcels (shown as dashed red lines) are defined as ReducedObservation@desc=“Road Extent”


New Road Parcels abutting: the common boundary line of R1 and R2 (shown as dashed red line) is defined as ReducedObservation@desc=“Road Extent”

This method will negate the marking requirements and enable the rendering service to render the Road Extent lines as dashed lines


This will apply for plans that dedicate the new road on registration.

For plans that show the road widening as a lot for future acquisition. The normal rules will apply treating the new (future road) lot as a standard lot in a DP

**Road Widening and Splays**

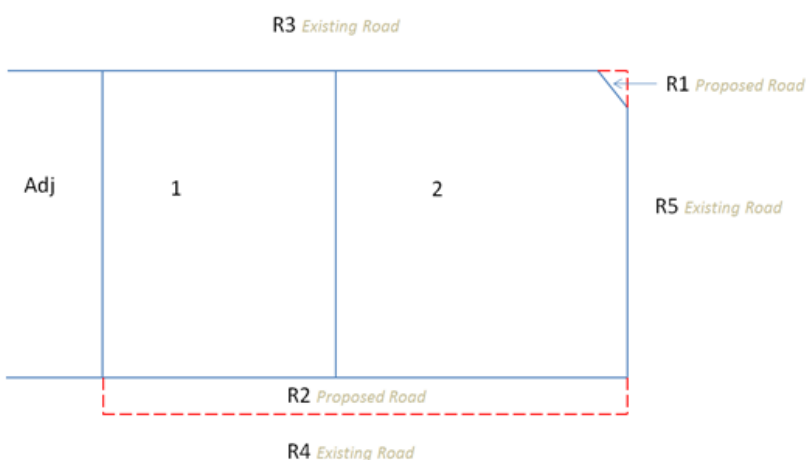


**New Road Parcels abutting**

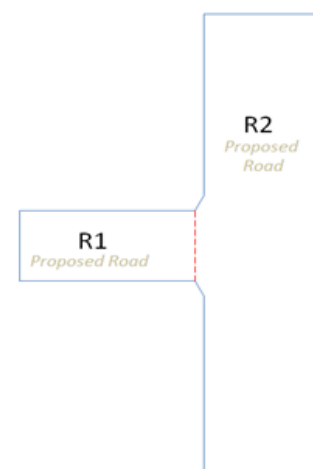

#### 4.24 Height Schedule and Height Difference Schedule

See diagram following for additional attributes used to construct the Height Schedule and Height Difference Schedule required under CI's 69 and 71 SSI Reg 2017.

All additional data required to construct the tables is already recorded in the LXML file  
 See also the relevant attribute information in ReducedObservation and RedVerticalObservation Sections in this document

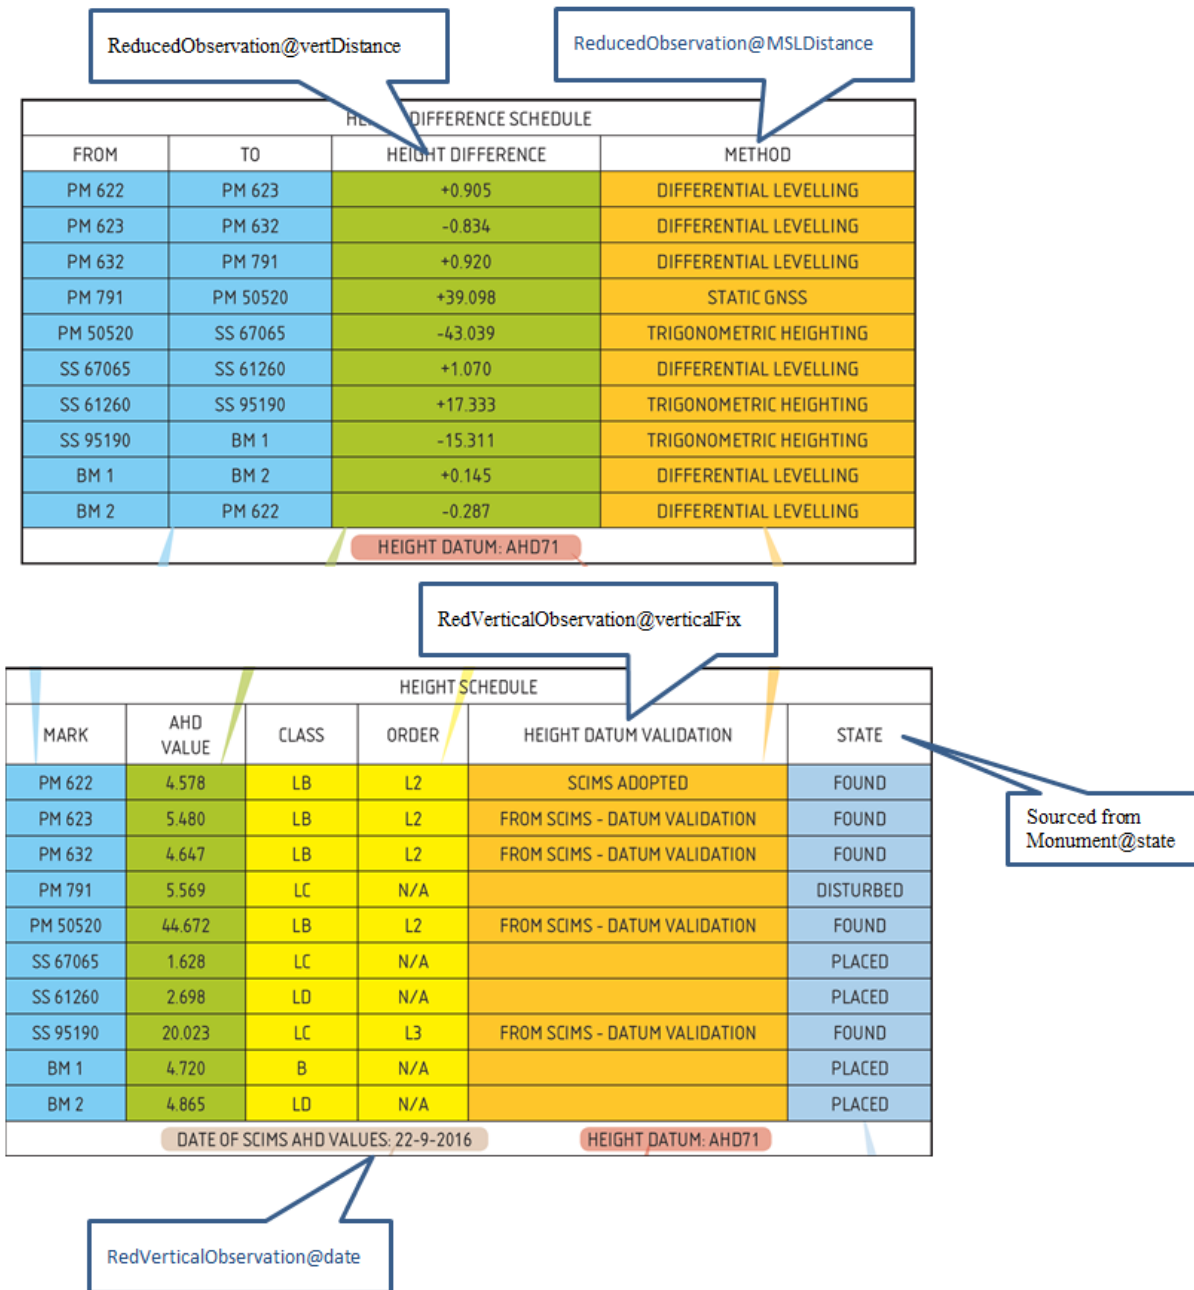



#### 4.25 GNSS Schedule

The GNSS Validation Schedule is required by CI 66 SSI Reg 2017 where the orientation of the survey is adopted from a grid bearing derived from MGA co-ordinates, determined using an approved GNSS method, of 2 permanent survey marks or reference marks.

The Schedule compares multiple measurements between the same Marks and is constructed using multiple ReducedObservations between the two Marks. To do this there needs to be multiple (2) InstrumentSetup elements for each of the 2 points used in the ReducedObservation

The structure of the LXML elements for the multiple ReducedObservations from SSM66367 to SSM19764 in the example Validation Schedule below is following:

GNSS VALIDATION SCHEDULE				
FROM	TO	GRID BEARING	DISTANCE	METHOD
SSM 66367	SSM 19764	289°09'34"	1092.340	EDM TRAVERSE
		289°09'34"	1092.332	CORS NRTK
SSM 172630	SSM 19087	12°44'44"	453.283	EDM TRAVERSE
		12°44'44"	453.290	AUSPOS
PM 169843	PM 169844	161°01'05"	1783.171	GNSS STATIC
		161°01'05"	1783.182	AUSPOS

```
<InstrumentSetup id="S-100" stationName="100" instrumentHeight="0">
| <InstrumentPoint pntRef="66367"/>
</InstrumentSetup>
<InstrumentSetup id="S-101" stationName="101" instrumentHeight="0">
| <InstrumentPoint pntRef="66367"/>
</InstrumentSetup>
| <InstrumentSetup id="S-102" stationName="102" instrumentHeight="0">
| <InstrumentPoint pntRef="19764"/>
</InstrumentSetup>
<InstrumentSetup id="S-103" stationName="103" instrumentHeight="0">
| <InstrumentPoint pntRef="19764"/>
</InstrumentSetup>
```

```
<ReducedObservation name="5" setupID="S-100" targetSetupID="S-102" azimuth="289.0934" horizDistance="1092.340" distanceType="EDM Traverse" azimuthType="EDM Traverse" desc="Connection"/>
<ReducedObservation name="6" setupID="S-101" targetSetupID="S-103" azimuth="289.0934" horizDistance="1092.332" distanceType="CORS NRTK" azimuthType="CORS NRTK" desc="Connection"/>
```

The "METHOD" is recorded using the ReducedObservation@distanceType/azimuthType which is an enumerated list see Appendix A3

## 5 STRATA PLAN SPECIFIC SCENARIOS

Only the plan drawing information contained in the Location and Floor Plans is included in the LXML file. All of the other data that is currently recorded on the Administration Sheets will remain on the Administration Sheets with some of it being replicated in the LXML file, as is done with Deposited Plans.

### 5.01 Structural Requirements


#### 5.01.1 Lot boundary definition Structural and Non Structural

Designate structural lines with wall rendering information

Coordinate Geometry of external and internal parcels do not share common CgPoints with a gap for wall

Construct geometry using:

Internal points for internal parcels and external points for external parcels

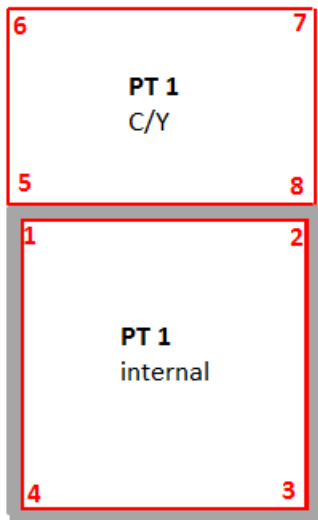

#### Structural Boundaries

The CoordGeom/Line@desc attribute will define the type of line work for a structure and the location of the boundary in relation to the structure.

For Lot boundaries defined by a structure the CoordGeom/Line@desc attribute will identify whether the boundary is on the Left, Right or Centre of the structure going clockwise

Values will be “SR”, “SL” and “SC”

The thick line representing the structure (e.g. Wall) will be rendered on the relative side of the boundary accordingly.

For non-boundary structural lines such as the building line work on the location Plan. The CoordGeom/Line@desc attribute will be “SR”

#### Non Structural boundaries

The CoordGeom/Line@desc attribute will = “NS” and will be rendered as a thin line

#### See example below

Internal parts are defined by inside face of wall (see redline and points). Line@desc=“SR”.


Rendering will draw thick line on left hand side of the boundary going clockwise. In other words the boundary is on the right side of the structure.

External parts of lots are defined by external face of wall (see external redline and points). Line@desc will be SR/L or NS accordingly. Rendering will draw thin line for Non Structural

and thick line for Structural ( again on left hand side going clockwise, hence thick line for line 8 to 5 will overlap line from 1 to 2

This method could be used regardless of actual wall thickness.

Scale of the plan will be defined by the surveyor by using the annotation element ( Annotation@type="Scale") in the LXML. The LPI rendering service will use the scale information to ensure the line thickness for structural line is rendered at 1mm. The surveyor should ensure that the points have appropriate coordinates so that structural lines render at 1mm in the scale defined in the file at A3 on a SP plan form.

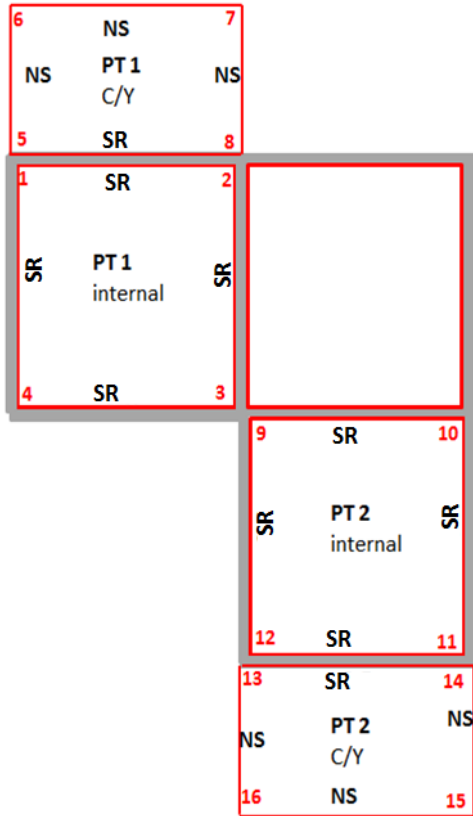

```
Parcel name="1" class="Lot" state="proposed" parcelType="Multipart" area="156">
```

```
<Parcels>
```

```
<Parcel name="1A" pclRef="1A"/>
```

```
<Parcel name="1B" pclRef="1B"/>
```

```
<Parcel name="1A" class="Lot" state="proposed" parcelType="Part" parcelFormat="Strata" buildingLevelNo="Ground Floor Plan">
```

```
<CoordGeom name="1A">
```

```
<Line desc="SR">
```

```
<Start pntRef="1"/>
```

```
<End pntRef="2"/>
```

```
</Line>
```

```
<Line desc="SR">
```

```
<Start pntRef="2"/>
```

```
<End pntRef="3"/>
```

```
</Line>
```

```
<Line desc="SR">
```

```
<Start pntRef="3"/>
```

```
<End pntRef="4"/>
```

```
</Line>
```

```
<Line desc="SR ">
```

```
<Start pntRef="4"/>
```

```
<End pntRef="1"/>
```

```
</Line>
```

```
</CoordGeom>
```

```
</Parcel>
```

```
<Parcel name="1B" desc="CY" class="Lot" state="proposed" parcelType="Part" parcelFormat="Strata" buildingLevelNo="Ground Floor Plan">
```

```
<CoordGeom name="1B">
```

```

<Line desc="NS">
  <Start pntRef="5"/>
  <End pntRef="6"/>
</Line>
<Line desc="NS ">
  <Start pntRef="6"/>
  <End pntRef="7"/>
</Line>
<Line desc="NS ">
  <Start pntRef="7"/>
  <End pntRef="8"/>
</Line>
<Line desc="SR ">
  <Start pntRef="8"/>
  <End pntRef="5"/>
</Line>

```


### Example for Columns – option 2

```

<CoordGeom name="X">
  <Line desc="NS ">
    <Start pntRef="1"/>
    <End pntRef="2"/>
  </Line>
  <Line desc="NS ">
    <Start pntRef="2"/>
    <End pntRef="3"/>
  </Line>
  <Line desc="SL">
    <Start pntRef="3"/>
    <End pntRef="4"/>
  </Line>
  <Line desc="NS ">
    <Start pntRef="4"/>
    <End pntRef="5"/>
  </Line>

  <Line desc="SC ">
    <Start pntRef="5"/>
    <End pntRef="6"/>
  </Line>
</CoordGeom>


```



### Lot boundary definition Structural Dashed

If the structure forms part of the lot (i.e. cubic space strata scheme the relevant CordGeom/Line@desc will be “SD” any structural boundary that is not forming part of the lot will be defined as per a normal SP

Note: “SD” means Structural dashed and will render as a thick dashed line

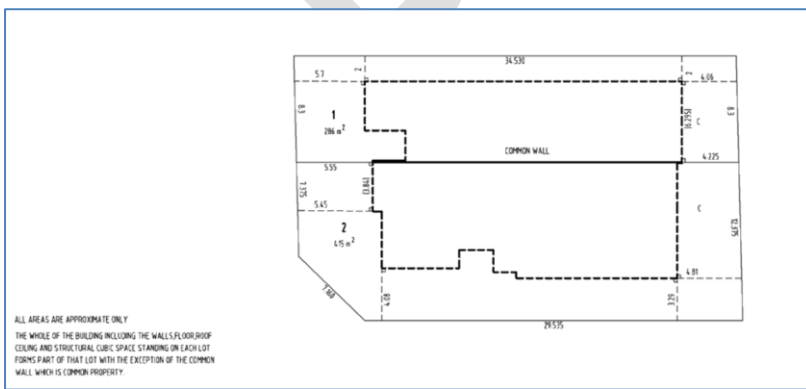

### 5.01.2 Separating Levels

In order to ensure information is only recorded on the relevant building level, there needs to be a way of separating the Location Plan and each Floor Plan so each point only exists on only one Floor Plan /Location Plan.

#### Separation is done using the CgPoint@code attribute

To facilitate separation and rendering of individual Location and Floor Plans, every point in the file will have a CgPoint@code attribute that corresponds the relevant Parcel@buildingLevelNo that it belongs to.

Coincident points at different levels of the building will have the same coordinates but a different CgPoint@code value

The value for the code attribute must have an numeric prefix starting at "0" for Location Plan and "1" for the lowest level of the building (eg lowest basement level) and increase by one for each level of the building going upwards including Mezzanine levels etc. For example a 3 storey building with 2 basement levels will have Cgpoint@code values as follows

Location Plan = 0, Location Plan

Basement Level 2 = 1, Basement Level 2

Basement Level 1 = 2, Basement Level 1


Ground Floor = 3, GroundFloor

Level 1 = 4, Level 1

Level 2 = 5, Level 2

Level 3 = 6, Level 3

Note the name of the building level can be a free text field ( e.g. Level 1, First Floor, Level A etc), but must be separated from the numeric prefix by a comma (i.e. comma delimited)

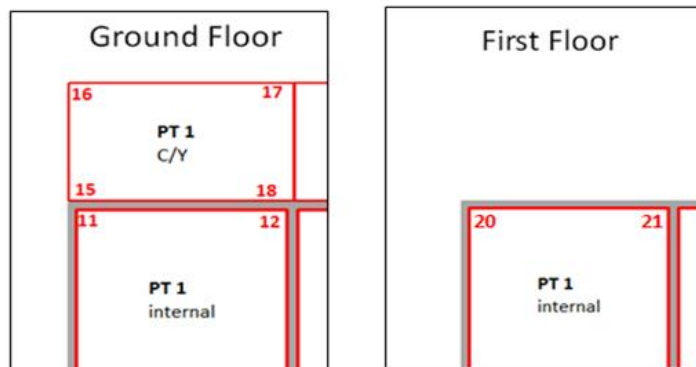

```
<CgPoint name="11" state="proposed" pntSurv="boundary" code="1,GroundFloor" >84.50000 140.00000</CgPoint>
<CgPoint name="12" state="proposed" pntSurv="boundary" code="1,GroundFloor" >84.50000 150.00000</CgPoint>
<CgPoint name="20" state="proposed" pntSurv="boundary" code="2,First Floor" >84.50000 140.00000</CgPoint>
<CgPoint name="21" state="proposed" pntSurv="boundary" code="2,First Floor" >84.50000 150.00000</CgPoint>
```

```
<Parcel name="1A" class="Lot" state="proposed" parcelType="Part" parcelFormat="Strata" area="56" buildingLevelNo="Ground Floor">
  <Center pntRef="235"/>
  <CoordGeom name="Geom-1A">
    <Line desc="SR">
      <Start pntRef="11"/>
      <End pntRef="12"/>
    </Line>
```

```
<Parcel name="1E" class="Lot" state="proposed" parcelType="Part" parcelFormat="Strata" area="56" buildingLevelNo="First Floor">
  <Center pntRef="235"/>
  <CoordGeom name="Geom-1E">
    <Line desc="SR">
      <Start pntRef="20"/>
      <End pntRef="21"/>
    </Line>
```


### 5.02 Location Plan

The following sections use sample Strata Plan drawing sheets to identify relevant data and describes how this data is recorded in the LXML file in the related tables.

Each table is followed by an image of the relevant plan sheet identifying the mapped data.

Data field	Display Item	LandXML Mapping
1	Base Parcel	<pre> &lt;Parcel name="55/1206312" class="Lot" state="affected" parcelType="Single" parcelFormat="Standard" buildingLevelNo="Location Plan"&gt;   &lt;Center pntRef="200"/&gt;   &lt;CoordGeom name="2"&gt;     &lt;Line desc="NS"&gt; &lt;Start pntRef="198"/&gt;     &lt;End pntRef="199"/&gt;   &lt;/Line&gt;   ..... &lt;/CoordGeom&gt; &lt;/Parcel&gt; &lt;ReducedObservation name="33" desc="Boundary" setupID="IS198" targetSetupID="IS199" horizDistance="72.085"/&gt; ..... </pre>
2	Adjoining parcels and roads	As per DP's add following attribute to Parcel element " buildingLevelNo="Location Plan"
3	Buildings and street No	<pre> &lt;Parcel name="Building 1" class="Building" desc="Two Story Brick Units" state="proposed" parcelType="Single" parcelFormat="Strata" buildingLevelNo="Location Plan" buildingNo="No99" &gt;   &lt;Center pntRef="210"/&gt;   &lt;CoordGeom name="2"&gt;     &lt;Line desc="SR "&gt;       &lt;Start pntRef="220"/&gt;       &lt;End pntRef="221"/&gt;     &lt;/Line&gt;     .....   &lt;/CoordGeom&gt; &lt;/Parcel&gt;  &lt;Parcel name="Building 2" class="Building" desc..... etc  No Reduced Observations </pre>
4	Strata lot boundaries external from building	<pre> &lt;Parcel name="PK2" desc="PK" parcelType="Single" class="Lot" state="proposed" parcelFormat="strata" buildingLevelNo="Location Plan" &gt;   &lt;Center pntRef="137"/&gt;   &lt;CoordGeom name="PK-2"&gt;     &lt;Line desc="NS"&gt;       &lt;Start pntRef="23"/&gt;       &lt;End pntRef="22"/&gt;     &lt;/Line&gt;....No Reduced Observations </pre>
5	Structural features such as walls and offsets that are not on lot boundary  If structure defines	<p>As per occupations in DP's: Use <b>PlanFeatures</b> to define position and description of structure and use <b>Monument</b> element to show offsets. Feature name to be followed by "Location Plan. E.g. Wall Location Plan</p> <p>Offsets can also be defined using the PlanFeature = "Offset " and selecting 2 points to show an offset value anywhere along a structure to the parcel boundary</p> <p>Use PlanFeature = "Offset " and selecting 2 points to show an offset value anywhere</p>

	lot boundary and offset is required	along a structure to the parcel boundary
6	Notes and designations	<p>&lt;SurveyHeader....&gt;</p> <p>&lt;Annotation type="Plan Note" name="1" desc="CY-Courtyard- Stratum statement "/&gt;</p> <p>&lt;Annotation type="Plan Note" name="2" desc="P-Porch Covered or stratum statement"/&gt;</p> <p>&lt;Annotation type="Plan Note" name="3" desc="PW- Prolongation of wall"/&gt;</p> <p>&lt;Annotation type="Plan Note" name="4" desc="PK –Parking Space Stratum statement"/&gt;</p> <p>.....</p> <p>Note: Only one annotation for each area that will apply to all location and floor plans</p>
7	Location Plan label	<Parcel buildingLevelNo="Location Plan"
N/A	All other data	As per DP's

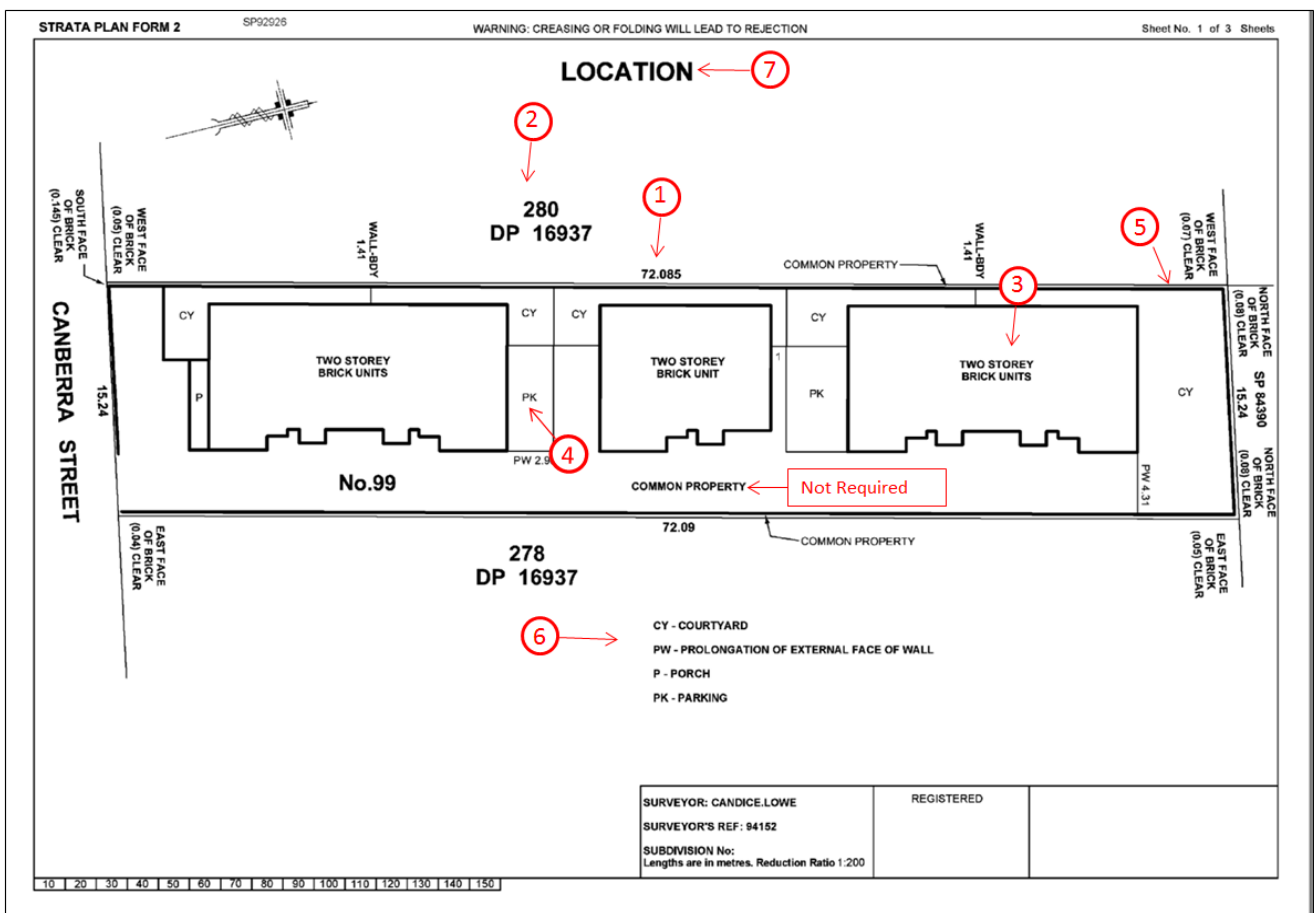


## 5.02 Floor Plans


Data field	Display Item	LandXML Mapping
8	Strata lot	<pre> &lt;Parcel name="1" class="Lot" state="proposed" parcelType="Multipart" area="196"&gt;   &lt;Parcels&gt;     &lt;Parcel name="1A" pciRef="1A"/&gt;     &lt;Parcel name="1B" pciRef="1B"/&gt;   &lt;/Parcels&gt;   &lt;Continue for all parts     &lt;/Parcels&gt;   &lt;Parcel name="1A" class="Lot" state="proposed" parcelType="Part" parcelFormat=" Strata "     area="114" buildingLevelNo="Ground Floor" &gt;     &lt;Center pntRef="209"/&gt;     &lt;CoordGeom name="1A"&gt;       &lt;Line desc="SR"&gt;         &lt;Start pntRef="73"/&gt;         &lt;End pntRef="43"/&gt;       &lt;/Line&gt;.....     &lt;Parcel name="1B" class="Lot" state="proposed" parcelType="Part" parcelFormat=" Strata "     area="15" desc="P" buildingLevelNo="Ground Floor" &gt;     &lt;Center pntRef="209"/&gt;     &lt;CoordGeom name="1B"&gt;       &lt;Line desc="SR"&gt;         &lt;Start pntRef="11"/&gt;         &lt;End pntRef="18"/&gt;       &lt;/Line&gt;.....     &lt;Parcel name="1C" class="Lot" state="proposed" parcelType="Part" parcelFormat=" Strata "     area="8" desc="P" buildingLevelNo="Ground Floor" &gt;     &lt;Center pntRef="210"/&gt;     &lt;CoordGeom name="1C"&gt;       &lt;Line desc="SR"&gt;         &lt;Start pntRef="29"/&gt;         &lt;End pntRef="30"/&gt;       &lt;/Line&gt;.....     &lt;Parcel name="1D" class="Lot" state="proposed" parcelType="Part" parcelFormat=" Strata "     area="55" desc="CY" buildingLevelNo="Ground Floor" &gt;     &lt;Center pntRef="299"/&gt;     &lt;CoordGeom name="1D"&gt;       &lt;Line desc="NS"&gt;         &lt;Start pntRef="35"/&gt;         &lt;End pntRef="36"/&gt;       &lt;/Line&gt;.....     &lt;Continue for all parts </pre>
9		<p>Parts of lots define by measured lines will have ReducedObservations using the FieldNote element to add descriptions to the line e.g. PW ( Prolongation of wall)</p> <pre> ReducedObservation name="33" desc=" Boundary" setupID="IS170" targetSetupID="IS171" horizDistance="2.965"&gt; &lt;FieldNote&gt; PW&lt;/FieldNote&gt;&lt;ReducedObservation/&gt; </pre>
10		<p>parts of lots defined by structures only are defined using the CoordGeom Element@attributes only as there are no dimensions</p> <p>If needed the Line@note attribute can be used to designate what structure is used to define the boundary e.g. "EDGE OF CONCRETE"</p> <p>Would usually be noted with an designation such as E with an Annotation@type="Plan Note" to identify what the designation represents e.g. "E-EDGE OF CONCRETE"</p>




11	Connections along walls	<ReducedObservation name="45" desc="Connection" setupID="IS198" targetSetupID="IS197" horizDistance="2.73"/> .....
12	Designations	See item 6 in Location Plan Section 5.01
13	Floor Plan and Level label	<Parcel buildingLevelNo="Ground Floor"
N/A	Structural features such as walls and offsets. That are shown within the cubic space of a lot  If structure defines boundary and offset is required	As per occupations in DP's: Use <b>PlanFeatures</b> to define position and description of structure and use <b>Monument</b> element to show offsets if any. Feature name to be followed by "Ground Floor" E.g. Wall Ground Floor  Offsets can also be defined using the PlanFeature = "Offset " and selecting 2 points to show an offset value anywhere along a structure to the parcel boundary  Use PlanFeature = "Offset " and selecting 2 points to show an offset value anywhere along a structure to the parcel boundary
N/A	All other data	As per DP's

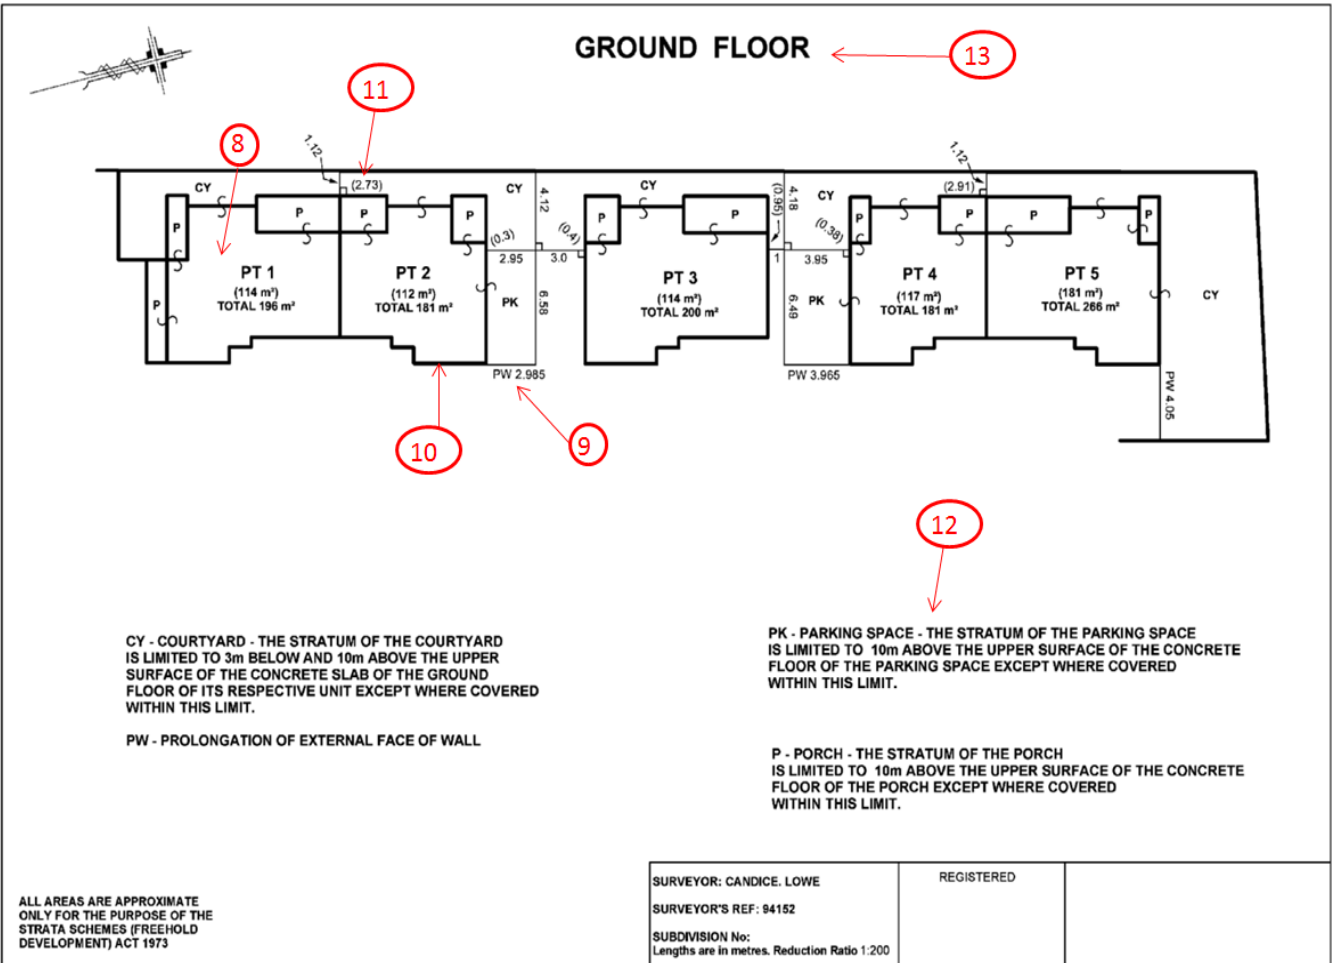

Data field	Display Item	LandXML Mapping
14	Strata lot	<pre> &lt;Parcel name="1E" class="Lot" state="proposed" parcelType="Part" parcelFormat=" Strata " area="82" buildingLevelNo="First Floor" &gt;   &lt;Center pntRef="209"/&gt;   &lt;CoordGeom name="1E"&gt;     &lt;Line desc="SR"&gt;       &lt;Start pntRef="73"/&gt;       &lt;End pntRef="43"/&gt;     &lt;/Line&gt;..... </pre>
15	Structural Boundaries	<p>Internal parts of lots are defined using the CoordGeom Element@attributes only as there are no dimensions</p> <p>Note: any line boundaries are defined as describe in Ground Floor</p>
N/A	All other data	As per DP's

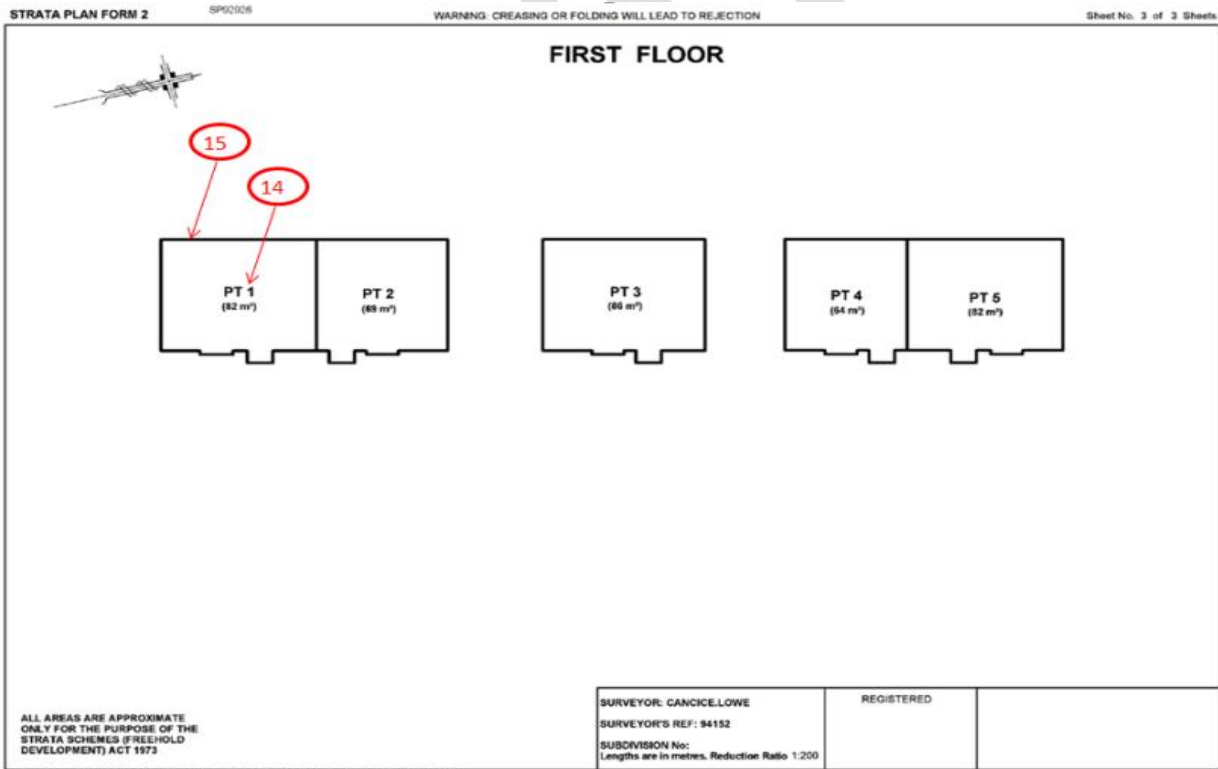


Data field	Display Item	LandXML Mapping
16	Common Property parcels <ul style="list-style-type: none"> <li>Unique areas</li> <li>Multiple common areas with same label</li> </ul>	<pre> &lt;Parcel name="CP" class="Common Property" state="proposed" parcelType="Multipart"&gt;   &lt;Parcels&gt;     &lt;Parcel name="CPA" pclRef="CPA"/&gt;     &lt;Parcel name="CPB" pclRef="CPB"/&gt;     &lt;Parcel name="C" pclRef="CPC"/&gt;   &lt;/Parcels&gt;   &lt;Continue for all parts   .....   &lt;/Parcels&gt;   &lt;Parcel name="CPA" class="Common Property" state="proposed" parcelType="Part"   parcelFormat="Strata" desc="Bin Storage" buildingLevelNo="Basement"&gt;     &lt;Center pntRef="300"/&gt;     &lt;CoordGeom name="CPA"&gt;       &lt;Line desc="NS"&gt;         &lt;Start pntRef="173"/&gt;         &lt;End pntRef="143"/&gt;       &lt;/Line&gt;.....     &lt;/CoordGeom&gt;   &lt;/Parcel&gt;   &lt;Parcel name="CPB" class="Common Property" state="proposed" parcelType="Part"   parcelFormat="Strata" desc="Lift" buildingLevelNo="Basement"&gt;     &lt;Center pntRef="350"/&gt;     &lt;CoordGeom name="CPB"&gt;       &lt;Line desc="SR"&gt;         &lt;Start pntRef="311"/&gt;         &lt;End pntRef="318"/&gt;       &lt;/Line&gt;.....     &lt;/CoordGeom&gt;   &lt;/Parcel&gt;   &lt;Parcel name="CPC" class="Common Property" state="proposed" parcelType="Part"   parcelFormat="Strata" desc="Lift" buildingLevelNo="Ground Floor"&gt;     &lt;Center pntRef="610"/&gt;     &lt;CoordGeom name="CPC L"&gt;       &lt;Line desc="SR"&gt;         &lt;Start pntRef="429"/&gt;         &lt;End pntRef="430"/&gt;       &lt;/Line&gt;.....     &lt;/CoordGeom&gt;   &lt;/Parcel&gt; </pre>

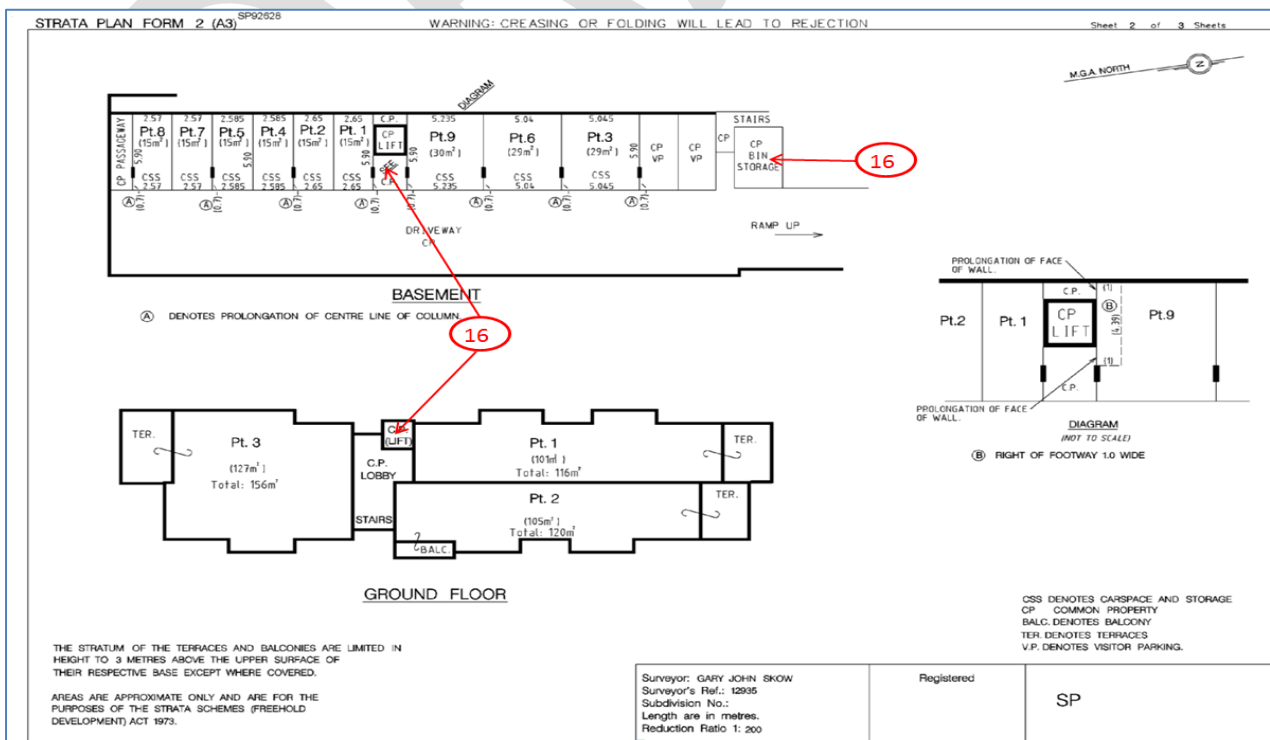

### 5.03 Cubic Space Floor Plan

Data field	Display Item	LandXML Mapping
17	Lot boundaries	<p>The perimeter boundaries of each lot are defines as in a normal SP with a series of Line@"desc" of "S" or "NS" as required.</p> <p>To add note on Common Wall use the Annotation@type="Plan Note"</p> <pre>&lt;Annotation type="Plan Note" name="n1" desc="the common wall between lots 1 and 2 is common property"/&gt;</pre> <p>or</p> <pre>&lt;Annotation type="Plan Note" name="n1" desc=" Where there is a common wall on the boundary between lots 1 and 2 the boundary is the centreline of the common wall"/&gt;</pre> <p>...</p>
18	Structure form part of lot	<p>If the structure forms part of the lot the relevant CoordGeom/Line@desc will be "SD" any structural boundary that is not forming part of the lot will be "SR" etc.</p> <p>Note: "SD" means Structural dashed and will render as a thick dashed line</p>
19	Connection lines	<pre>&lt;ReducedObservation name="33" desc="Connection" setupID="IS170" targetSetupID="IS171" horizDistance="2.965"&gt;</pre> <p>If there is a note on the connection (e.g. PW) use FieldNote</p> <pre>&lt;ReducedObservation .....&lt;FieldNote&gt; PW&lt;/FieldNote&gt;&lt;ReducedObservation/&gt;</pre> <p>Use Annotation@type="Plan Note" to identify any abbreviated Field Note values</p> <pre>&lt;Annotation type="Plan Note" name="n2" desc="PW- Prolongation of wall"/&gt;</pre>
N/A	All other data	As per normal SP's

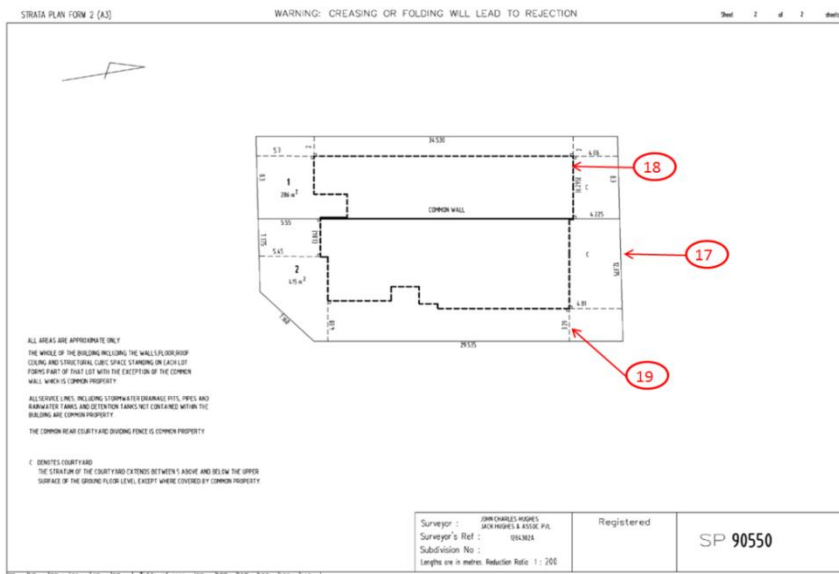

## APPENDIX A – ENUMERATION LISTS

The following appendix outlines all the LXML type definitions used by the ePlan Protocol in NSW implementation. This includes the enumerated types.

### A1. Primitive Data Types

The following are primitive data type definitions used by the CIF. They are defined by the XML standard (see <http://www.w3.org/TR/xmlschema-0/#CreatDt>).

Type	Description
anySimpleType	Highest level of simple type and can store any simple type.
anyURI	Uniform Resource Identifier
boolean	True or False
date	ISO8601 date format: YYYY-MM-DD
double	A double precision floating point number
IDREF	A reference to the ID of another element
int	An integer
positiveInteger	A positive integer value
string	An extended sequence of characters
time	ISO8601 time format: hh:mm:ss

### A2. LandXML Enumerated Types

The following types are defined in LXML with an enumerated list of valid values. NSW will be using a subset of the LXML values available.

See LXML 1.2 schema for full list <http://www.landxml.org/schema/LandXML-1.2/LandXML-1.2.xsd>

The attributes are listed under the element to which they belong and are listed in the order, in which the elements appear in this document.

Attribute	Type	Description	Enumerations
<b>Metric</b>			
directionUnit	angularType	Angular values in numeric format. E.g. 45° 3' 5" should be entered as "45.0305". Minutes and seconds must be within the numeric range between 00 and 60.	Set to: decimal dd.mm.ss
areaUnit	metArea	Valid metric units of measure for area.	Set to: squareMeter
linearUnit	metLinear	Valid metric units of measure for length	Set to: meter
pressureUnit	metPressure	Valid metric units of measure for pressure	Set to: milliBars

Attribute	Type	Description	Enumerations
temperatureUnit	metTemperature	Valid metric units of measure for temperature.	Set to: celsius
volumeUnit	metVolume	Valid metric units of measure for area volume.	Set to: cubicMeter
<b>CgPoint</b>			
state	stateType	The state of the point. Either proposed (new) or existing	<ul style="list-style-type: none"> <li>▪ proposed</li> <li>▪ existing</li> </ul>
pntSurv	survPntType	The type/purpose of the point	<ul style="list-style-type: none"> <li>▪ boundary</li> <li>▪ control</li> <li>▪ natural boundary</li> <li>▪ reference</li> <li>▪ sideshot</li> <li>▪ traverse</li> </ul>
<b>Parcel</b>			
state	parcelStateType	The state of the parcel in context of other parcels in the plan	<ul style="list-style-type: none"> <li>▪ adjoining</li> <li>▪ existing</li> <li>▪ proposed</li> <li>▪ affected</li> </ul>
<b>Curve</b>			
rot	clockwise	The direction of the curve either clockwise (cc) or counter clockwise (ccw)	<ul style="list-style-type: none"> <li>▪ cw</li> <li>▪ ccw</li> </ul>
<b>SurveyHeader</b>			
type	surveyType	Whether the plan was surveyed or compiled	<ul style="list-style-type: none"> <li>▪ compiled</li> <li>▪ surveyed</li> </ul>
<b>ReducedArcObservation</b>			
rot	clockwise	The direction of the curve either clockwise (cc) or counter clockwise (ccw)	<ul style="list-style-type: none"> <li>▪ cw</li> <li>▪ ccw</li> </ul>

### A3. NSW Enumerated Types

The following enumerated types in LandXML are defined as jurisdictional enumeration types to meet each jurisdictional requirement. NSW enumeration schema file is available at the following link: [http://www.lpi.nsw.gov.au/\\_data/assets/file/0011/146981/xml-gov-au-nsw-icsm-eplan-cif-enumerated-types-1.0.xsd](http://www.lpi.nsw.gov.au/_data/assets/file/0011/146981/xml-gov-au-nsw-icsm-eplan-cif-enumerated-types-1.0.xsd)

The attributes are listed under the element to which they belong and are listed in the order, in which the elements appear in this document.

Attribute	Type	Description	Enumerations
<b>CoordinateSystem</b>			
datum	surveyBgDatumType	Horizontal Datum of the plan	<ul style="list-style-type: none"> <li>▪ ISG</li> <li>▪ Local</li> <li>▪ MGA</li> <li>▪ MM</li> <li>▪ TM</li> </ul>
horizontalDatum	horzDatumType	Datum of CgPoint coordinates	Set to: Local
verticalDatum	vertDatumType	Vertical datum for the plan	Set to: AHD
<b>CgPoints</b>			
zoneNumber	zoneNumberType	The MGA zone for the plan and NSW zones should be one of the following	<ul style="list-style-type: none"> <li>▪ 54</li> <li>▪ 55</li> <li>▪ 56</li> <li>▪ 57</li> </ul>
<b>Monument</b>			
state	monumentState	This is a list of states for a monument (mark or occupation).	<ul style="list-style-type: none"> <li>▪ Found</li> <li>▪ Gone</li> <li>▪ Not Found</li> <li>▪ <del>Found Now Gone</del></li> <li>▪ Placed</li> <li>▪ Not Marked</li> <li>▪ Found By Me</li> <li>▪ Not Marked</li> <li>▪ Obstructed</li> </ul>
Type	monumentType	This is a survey mark types, also includes "Not Marked" and "Occupation" to accommodate complex scenarios as described in Section 4 of this document.	<ul style="list-style-type: none"> <li>▪ DH&amp;W</li> <li>▪ GIP</li> <li>▪ Wing</li> <li>▪ Reference Tree</li> <li>▪ Tree</li> <li>▪ Approved Mark</li> <li>▪ Broad Arrow</li> <li>▪ Conc Block</li> </ul>

Attribute	Type	Description	Enumerations
		<p><b>N.B.</b>            "Approved Mark" together with desc attribute can be used if the used mark type is not in the list</p>	<ul style="list-style-type: none"> <li>▪ DH</li> <li>▪ Bottle</li> <li>▪ Lockspit</li> <li>▪ Metal Spike</li> <li>▪ GIN</li> <li>▪ Nail</li> <li>▪ Peg</li> <li>▪ PM</li> <li>▪ Pipe</li> <li>▪ Post</li> <li>▪ PVC Pipe</li> <li>▪ Rod</li> <li>▪ Specified Point</li> <li>▪ Spike</li> <li>▪ Star Picket</li> <li>▪ SSM</li> <li>▪ Reference Mark Token</li> <li>▪ TS</li> <li>▪ Not Marked</li> <li>▪ Occupation</li> <li>▪ MM</li> <li>▪ GB</li> <li>▪ CP</li> <li>▪ CR</li> <li>▪ Witness Mark</li> <li>▪ BM</li> <li>▪ Steel Fence Post</li> <li>▪ Chiselled Triangle</li> <li>▪ Non Corrodible Bolt</li> <li>▪ Non Corrodible Spike</li> <li>▪ Non Corrodible Nail</li> <li>▪ Bench Mark Token</li> <li>▪ Boundary Mark Token</li> <li>▪ Non Corrodible Nail And Wing</li> <li>▪ PVC Star Picket</li> </ul>
condition	monumentCondition	This is a list of mark conditions that may be applied to a <b>Control Mark</b> .	<ul style="list-style-type: none"> <li>▪ Destroyed</li> <li>▪ Not Found</li> <li>▪ Uncertain</li> <li>▪ Subsidence Area</li> <li>▪ Found Intact</li> <li>▪ Restricted Access</li> </ul>
<b>Parcel</b>			
class	parcelClass	This is a list of parcel classes in NSW.	<ul style="list-style-type: none"> <li>▪ Administrative Area</li> </ul>



Attribute	Type	Description	Enumerations
		<p><b>N.B.</b> Classes that are in blue text are secondary interest parcels and require desc attribute to be populated.</p>	<ul style="list-style-type: none"> <li>▪ Association Property</li> <li>▪ Building</li> <li>▪ <a href="#">Caveat</a></li> <li>▪ Common Property</li> <li>▪ <a href="#">Covenant</a></li> <li>▪ <a href="#">Designated Area</a></li> <li>▪ <a href="#">Easement</a></li> <li>▪ <a href="#">Exclusive Use Area</a></li> <li>▪ <a href="#">Footprint</a></li> <li>▪ Hydrography</li> <li>▪ <a href="#">Lease</a></li> <li>▪ <a href="#">License</a></li> <li>▪ Lot</li> <li>▪ <a href="#">Permit</a></li> <li>▪ <a href="#">Positive Covenant</a></li> <li>▪ <a href="#">Profit A Prende</a></li> <li>▪ <a href="#">Restriction On Use Of Land</a></li> <li>▪ <a href="#">Restriction On User</a></li> <li>▪ Railway</li> <li>▪ Reserved Road</li> <li>▪ Road</li> </ul>
parcelFormat	parcelFormat	Parcel Format describes how the parcel is described	<ul style="list-style-type: none"> <li>▪ Standard</li> <li>▪ Strata</li> <li>▪ Stratum</li> </ul>
parcelType	parcelTypeType	The parcel structure type	<ul style="list-style-type: none"> <li>▪ Single</li> <li>▪ Multipart</li> <li>▪ Part</li> </ul>
UseOfParcel	useOfParcelType	Describes how the parcel is used for	<ul style="list-style-type: none"> <li>▪ Access Channel</li> <li>▪ Administrative Area</li> <li>▪ Artificial Water Way</li> <li>▪ Association Property</li> <li>▪ Balcony</li> <li>▪ Bay</li> <li>▪ Boat Ramps</li> <li>▪ Canal</li> <li>▪ Car Parking</li> <li>▪ Car Space</li> <li>▪ Carport</li> <li>▪ Cemetery</li> <li>▪ Coastal Management Zone</li> <li>▪ Common Property</li> <li>▪ County</li> <li>▪ Courtyard</li> <li>▪ Creek</li> <li>▪ Deck</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Drainage Reserve</li> <li>▪ Entry</li> <li>▪ Garage</li> <li>▪ Garbage</li> <li>▪ Garden</li> <li>▪ Garden Area</li> <li>▪ Garden Space</li> <li>▪ Landing</li> <li>▪ Letter Box</li> <li>▪ Lift</li> <li>▪ Loading Bay</li> <li>▪ Local Government Area</li> <li>▪ Locality</li> <li>▪ Main</li> <li>▪ Ocean</li> <li>▪ Parish</li> <li>▪ Parking</li> <li>▪ Parking Area</li> <li>▪ Patio</li> <li>▪ Permit</li> <li>▪ Permit To Occupy</li> <li>▪ Planter</li> <li>▪ Planter Box</li> <li>▪ Plunge Pool</li> <li>▪ Pool</li> <li>▪ Porch</li> <li>▪ Portico</li> <li>▪ Private Yard</li> <li>▪ Public Reserve</li> <li>▪ Public Use Land</li> <li>▪ Remainder</li> <li>▪ River</li> <li>▪ Roof Garden</li> <li>▪ Stairs</li> <li>▪ Storage</li> <li>▪ Store</li> <li>▪ Swimming Pool</li> <li>▪ Temporary Road</li> <li>▪ Terrace</li> <li>▪ Travelling Stock Route</li> <li>▪ Tree Clearing</li> <li>▪ Unit</li> <li>▪ Verandah</li> <li>▪ Visitor Parking</li> <li>▪ Void</li> <li>▪ Water Feature</li> <li>▪ Yard</li> <li>▪ Yard Area</li> </ul>
<b>Location Address</b>			

<b>Attribute</b>	<b>Type</b>	<b>Description</b>	<b>Enumerations</b>
addressType	addressTypeType	This Type is to define a specific list of address types	<ul style="list-style-type: none"> <li>▪ Alias</li> <li>▪ Historical</li> <li>▪ Primary</li> <li>▪ Secondary</li> </ul>
flatType	flatTypeType	To define a specific list of living unit types for addressing	<ul style="list-style-type: none"> <li>▪ Apartment</li> <li>▪ Berth</li> <li>▪ Cottage</li> <li>▪ Dock</li> <li>▪ Duplex</li> <li>▪ Factory</li> <li>▪ Flat</li> <li>▪ House</li> <li>▪ Kiosk</li> <li>▪ Office</li> <li>▪ Penthouse</li> <li>▪ Premises</li> <li>▪ Room</li> <li>▪ Shed</li> <li>▪ Shop</li> <li>▪ Stall</li> <li>▪ Studio</li> <li>▪ Suite</li> <li>▪ Townhouse</li> <li>▪ Unit</li> <li>▪ Villa</li> <li>▪ Ward</li> <li>▪ Warehouse</li> </ul>
floorLevelType	floorLevelTypeType	To define a specific list of floor level types	<ul style="list-style-type: none"> <li>▪ Basement</li> <li>▪ Floor</li> <li>▪ Ground</li> <li>▪ Level</li> <li>▪ Lobby</li> <li>▪ Lower Ground Floor</li> <li>▪ Lower Level</li> <li>▪ Mezzanine</li> <li>▪ Observation Deck</li> <li>▪ Parking</li> <li>▪ Platform</li> <li>▪ Podium</li> <li>▪ Rooftop</li> <li>▪ Sub-Basement</li> <li>▪ Upper Ground Floor</li> </ul>
<b>RoadName</b>			
roadName	roadNameTypeType	To define a specific list of Road name types	<ul style="list-style-type: none"> <li>▪ Access</li> <li>▪ Accessway</li> <li>▪ Alley</li> <li>▪ Alleyway</li> <li>▪ Amble</li> <li>▪ Anchorage</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Approach</li> <li>▪ Arcade</li> <li>▪ Artery</li> <li>▪ Avenue</li> <li>▪ Basin</li> <li>▪ Beach</li> <li>▪ Bend</li> <li>▪ Block</li> <li>▪ Boardwalk</li> <li>▪ Boulevard</li> <li>▪ Boulevarde</li> <li>▪ Brace</li> <li>▪ Brae</li> <li>▪ Branch</li> <li>▪ Break</li> <li>▪ Bridge</li> <li>▪ Broadway</li> <li>▪ Brow</li> <li>▪ Bypass</li> <li>▪ Byway</li> <li>▪ Causeway</li> <li>▪ Centre</li> <li>▪ Centreway</li> <li>▪ Chase</li> <li>▪ Circle</li> <li>▪ Circlet</li> <li>▪ Circuit</li> <li>▪ Circus</li> <li>▪ Close</li> <li>▪ Colonnade</li> <li>▪ Common</li> <li>▪ Concourse</li> <li>▪ Copse</li> <li>▪ Corner</li> <li>▪ Corso</li> <li>▪ Court</li> <li>▪ Courtyard</li> <li>▪ Cove</li> <li>▪ Crescent</li> <li>▪ Crest</li> <li>▪ Cross</li> <li>▪ Crossing</li> <li>▪ Crossroad</li> <li>▪ Crossway</li> <li>▪ Cruiseway</li> <li>▪ Cul-de-Sac</li> <li>▪ Cutting</li> <li>▪ Dale</li> <li>▪ Dell</li> <li>▪ Deviation</li> <li>▪ Dip</li> <li>▪ Distributor</li> <li>▪ Drive</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Driveway</li> <li>▪ Edge</li> <li>▪ Elbow</li> <li>▪ End</li> <li>▪ Entrance</li> <li>▪ Esplanade</li> <li>▪ Estate</li> <li>▪ Expressway</li> <li>▪ Extension</li> <li>▪ Fairway</li> <li>▪ Fire Track</li> <li>▪ Firetrail</li> <li>▪ Flat</li> <li>▪ Follow</li> <li>▪ Footway</li> <li>▪ Foreshore</li> <li>▪ Formation</li> <li>▪ Freeway</li> <li>▪ Front</li> <li>▪ Frontage</li> <li>▪ Gap</li> <li>▪ Garden(s)</li> <li>▪ Gate(s)</li> <li>▪ Glade</li> <li>▪ Glen</li> <li>▪ Grange</li> <li>▪ Green</li> <li>▪ Ground</li> <li>▪ Grove</li> <li>▪ Gully</li> <li>▪ Heights</li> <li>▪ Highroad</li> <li>▪ Highway</li> <li>▪ Hill</li> <li>▪ Interchange</li> <li>▪ Intersection</li> <li>▪ Island</li> <li>▪ Junction</li> <li>▪ Key</li> <li>▪ Landing</li> <li>▪ Lane</li> <li>▪ Laneway</li> <li>▪ Lees</li> <li>▪ Line</li> <li>▪ Link</li> <li>▪ Little</li> <li>▪ Lookout</li> <li>▪ Loop</li> <li>▪ Lower</li> <li>▪ Mall</li> <li>▪ Meander</li> <li>▪ Mew</li> <li>▪ Mews</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Motorway</li> <li>▪ Mount</li> <li>▪ Nook</li> <li>▪ Outlook</li> <li>▪ Parade</li> <li>▪ Park</li> <li>▪ Parklands</li> <li>▪ Parkway</li> <li>▪ Part</li> <li>▪ Pass</li> <li>▪ Passage</li> <li>▪ Path</li> <li>▪ Pathway</li> <li>▪ Piazza</li> <li>▪ PKW</li> <li>▪ Place</li> <li>▪ Plateau</li> <li>▪ Plaza</li> <li>▪ Pocket</li> <li>▪ Point</li> <li>▪ Port</li> <li>▪ Promenade</li> <li>▪ Quad</li> <li>▪ Quadrangle</li> <li>▪ Quadrant</li> <li>▪ Quay(s)</li> <li>▪ Ramble</li> <li>▪ Ramp</li> <li>▪ Range</li> <li>▪ Reach</li> <li>▪ Reserve</li> <li>▪ Rest</li> <li>▪ Retreat</li> <li>▪ Ride</li> <li>▪ Ridge</li> <li>▪ Ridgeway</li> <li>▪ Right Of Way</li> <li>▪ Ring</li> <li>▪ Rise</li> <li>▪ River</li> <li>▪ Riverway</li> <li>▪ Riviera</li> <li>▪ Road</li> <li>▪ Roads</li> <li>▪ Roadside</li> <li>▪ Roadway</li> <li>▪ Ronde</li> <li>▪ Rosebowl</li> <li>▪ Rotary</li> <li>▪ Round</li> <li>▪ Route</li> <li>▪ Row</li> <li>▪ Rue</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Run</li> <li>▪ Service Way</li> <li>▪ Siding</li> <li>▪ Slope</li> <li>▪ Sound</li> <li>▪ Spur</li> <li>▪ Square</li> <li>▪ Stairs</li> <li>▪ State Highway</li> <li>▪ Steps</li> <li>▪ Strait</li> <li>▪ Strand</li> <li>▪ Street</li> <li>▪ Strip</li> <li>▪ Subway</li> <li>▪ Tarn</li> <li>▪ Terrace</li> <li>▪ Thoroughfare</li> <li>▪ Tollway</li> <li>▪ Top</li> <li>▪ Tor</li> <li>▪ Towers</li> <li>▪ Track</li> <li>▪ Trail</li> <li>▪ Trailer</li> <li>▪ Triangle</li> <li>▪ Trunkway</li> <li>▪ Turn</li> <li>▪ Underpass</li> <li>▪ Upper</li> <li>▪ Vale</li> <li>▪ Viaduct</li> <li>▪ View</li> <li>▪ Villas</li> <li>▪ Vista</li> <li>▪ Wade</li> <li>▪ Walk</li> <li>▪ Walkway</li> <li>▪ Way</li> <li>▪ Wharf</li> <li>▪ Wynd</li> <li>▪ Yard</li> </ul>
roadNameSuffix	roadNameSuffixType	To allow a list of specific road suffixes	<ul style="list-style-type: none"> <li>▪ Central</li> <li>▪ East</li> <li>▪ Extension</li> <li>▪ Lower</li> <li>▪ North</li> <li>▪ North East</li> <li>▪ North West</li> <li>▪ South</li> <li>▪ South East</li> <li>▪ South West</li> <li>▪ Upper</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ West</li> </ul>
roadType	roadTypeType	To define if the road is a public, private or temporary road	<ul style="list-style-type: none"> <li>▪ Public</li> <li>▪ Private</li> <li>▪ Temporary</li> </ul>
<b>AddressPoint</b>			
addressPointType	addressPointTypeType	This is to define the type of Geocode what the address point is for.	<ul style="list-style-type: none"> <li>▪ Access Point</li> <li>▪ Centroid of Parcel</li> </ul>
<b>Survey Header</b>			
jurisdiction	jurisdictionType	This is the name of the jurisdiction (i.e. state) and should be Set to: New South Wales for all plans lodged at LRS	<ul style="list-style-type: none"> <li>▪ Australian Capital Territory</li> <li>▪ New South Wales</li> <li>▪ Northern Territory</li> <li>▪ Queensland</li> <li>▪ South Australia</li> <li>▪ Tasmania</li> <li>▪ Western Australia</li> <li>▪ Victoria</li> </ul>
surveyFormat	surveyFormatType	Describes the format of the survey	<ul style="list-style-type: none"> <li>▪ Community Schemes</li> <li>▪ Examination Survey</li> <li>▪ Standard</li> <li>▪ Stratum</li> <li>▪ Strata Schemes</li> <li>▪ Survey Information Only</li> </ul>
<b>AdministrativeArea</b>			
adminAreaType	adminAreaTypeType	Type of Admin Area	<ul style="list-style-type: none"> <li>▪ County</li> <li>▪ Locality</li> <li>▪ Local Government Area</li> <li>▪ Parish</li> <li>▪ Survey Region</li> <li>▪ Terrain</li> </ul>
<b>PurposeOfSurvey</b>			
purposeOfSurvey@name	purpSurvType	Purpose of the plan	<ul style="list-style-type: none"> <li>▪ Additional Sheet For Community Title Plan</li> <li>▪ Boundary Adjustment Plan For Community Title Plan</li> </ul>



Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Building Alteration Plan</li> <li>▪ Building Alteration Plan – Leasehold</li> <li>▪ Building Stratum Subdivision</li> <li>▪ Coal Definition</li> <li>▪ Community Plan</li> <li>▪ Community Plan Of Consolidation</li> <li>▪ Community Plan Of Subdivision</li> <li>▪ Consolidation</li> <li>▪ Crown Folio Creation</li> <li>▪ Delimitation</li> <li>▪ Departmental</li> <li>▪ Easement</li> <li>▪ Ex-Survey Plan</li> <li>▪ Lease</li> <li>▪ Limited Folio Creation</li> <li>▪ Neighbourhood Plan</li> <li>▪ Neighbourhood Plan Of Consolidation</li> <li>▪ Neighbourhood Plan Of Subdivision</li> <li>▪ Oyster Lease</li> <li>▪ Part Strata</li> <li>▪ Pipelines Act, 1967</li> <li>▪ Precinct Plan</li> <li>▪ Precinct Plan Of Consolidation</li> <li>▪ Precinct Plan Of Subdivision</li> <li>▪ Primary Application</li> <li>▪ Redefinition</li> <li>▪ Replacement Sheet For Community Title Plan</li> <li>▪ Resumption Or Acquisition</li> <li>▪ Road Or Motorway</li> <li>▪ Roads Act, 1993</li> <li>▪ Strata Plan</li> <li>▪ Strata Plan – Leasehold</li> <li>▪ Strata Plan Of Consolidation</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Strata Plan Of Consolidation – Leasehold</li> <li>▪ Strata Plan Of Subdivision</li> <li>▪ Strata Plan Of Subdivision – Leasehold</li> <li>▪ Staged Strata Plan</li> <li>▪ Staged Strata Plan Of Subdivision</li> <li>▪ Subdivision</li> <li>▪ Surrender</li> <li>▪ Survey Information Only</li> </ul>
<b>AdministrativeDate</b>			
adminDateType	adminDateTypeType	The administrative purpose of the date	<ul style="list-style-type: none"> <li>▪ Date Of Survey</li> <li>▪ Date Of Compilation</li> <li>▪ Date Of Survey Certificate</li> <li>▪ Date Of Subdivision Certificate</li> <li>▪ Date Of Strata Certificate</li> </ul>
<b>Personnel</b>			
regType	registrationType	Surveyor's registration state	Set to: Registered
role	surveyorRoleType	Surveyor's role	Set to: Signing Surveyor
<b>Annotation</b>			
type	annotationType	The type of annotation	<ul style="list-style-type: none"> <li>• Parcel Note</li> <li>• Plan Note</li> <li>• Plans Used</li> <li>• Subdivision Number</li> <li>• Diagram</li> <li>• Diagram Lots</li> <li>• Diagram Occupations</li> <li>• Diagram Secondary Interests</li> <li>• Direction Of Flow</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>• Tidal</li> <li>• Direction Of Flow Non Tidal</li> <li>• Combined Scale Factor</li> <li>• LRS File Ref</li> <li>• Scale</li> </ul>
<b>ReducedObservation</b>			
desc	purposeType	This is the equivalent of the line type	<ul style="list-style-type: none"> <li>▪ Boundary</li> <li>▪ Road</li> <li>▪ Connection</li> <li>▪ Road Extent</li> <li>▪ Reference</li> </ul>
distanceType/ azimuthType	observationType	This is a list of defined observation types.	<ul style="list-style-type: none"> <li>▪ Adopted</li> <li>▪ Calculated</li> <li>▪ Deducted</li> <li>▪ Measured</li> <li>▪ Scaled</li> <li>▪ Compiled</li> <li>▪ GNSS</li> <li>▪ LRSCalculated</li> <li>▪ Cadastral Traverse</li> <li>▪ AUSPOS</li> <li>▪ Static GNSS</li> <li>▪ RTK GNSS</li> <li>▪ CORS NRTK GNSS</li> <li>▪ CORS RTK GNSS</li> <li>▪ CORS Static GNSS</li> </ul>
distanceAccClass	distanceAccType	This is a list of states for a monument.	<ul style="list-style-type: none"> <li>▪ Found</li> <li>▪ Placed</li> <li>▪ Found By Me</li> </ul>
MSLDistance	heightMethodType	This is a list of methods used for height measurement	<ul style="list-style-type: none"> <li>▪ Differential Levelling</li> <li>▪ Trigonometric Heighting</li> <li>▪ Static GNSS</li> <li>▪ RTK GNSS</li> <li>▪ CORS NRTK GNSS</li> <li>▪ CORS RTK GNSS</li> <li>▪ CORS Static GNSS</li> </ul>
<b>ReducedArcObservation</b>			
desc	purposeType	This is the equivalent of the line type	<ul style="list-style-type: none"> <li>▪ Boundary</li> <li>▪ Road</li> <li>▪ Connection</li> </ul>

Attribute	Type	Description	Enumerations
			<ul style="list-style-type: none"> <li>▪ Road Extent</li> <li>▪ Reference</li> </ul>
arcType	observationType	This is a list of defined observation types.	<ul style="list-style-type: none"> <li>▪ Adopted</li> <li>▪ Calculated</li> <li>▪ Deducted</li> <li>▪ Measured</li> <li>▪ Scaled</li> <li>▪ Compiled</li> <li>▪ GNSS</li> <li>▪ LRSCalculated</li> </ul>
<b>RedHorizontalPosition</b>			
horizontalDatum	horzDatumType	Horizontal datum of SCIMS marks	<ul style="list-style-type: none"> <li>▪ ISG</li> <li>▪ Local</li> <li>▪ MGA</li> <li>▪ MM</li> <li>▪ TM</li> </ul>
horizontalFix	horzFixType	Method used to determine the coordinates of the SCIMS marks	<ul style="list-style-type: none"> <li>▪ SCIMS</li> <li>▪ Traverse</li> <li>▪ Scaled From Map</li> <li>▪ Astro</li> <li>▪ Policy 3</li> <li>▪ GNSS</li> <li>▪ From SCIMS</li> <li>▪ Cadastral Traverse</li> <li>▪ AUSPOS</li> <li>▪ Static GNSS</li> <li>▪ RTK GNSS</li> <li>▪ CORS NRTK GNSS</li> <li>▪ CORS RTK GNSS</li> <li>▪ CORS STATIC GNSS</li> <li>▪ Autonomous GNSS</li> </ul>
Class	horzClassType	SCIMS horizontal class	<ul style="list-style-type: none"> <li>▪ 3A</li> <li>▪ 2A</li> <li>▪ A</li> <li>▪ B</li> <li>▪ C</li> <li>▪ D</li> <li>▪ E</li> <li>▪ U</li> </ul>
order	horzOrderType	SCIMS horizontal order	<ul style="list-style-type: none"> <li>▪ 00</li> <li>▪ 0</li> <li>▪ 1</li> <li>▪ 2</li> <li>▪ 3</li> <li>▪ 4</li> <li>▪ 5</li> <li>▪ U</li> </ul>

RedVerticalObservation			
verticalDatum	vertDatumType	Vertical datum of SCIMS marks	Set to: AHD
Class	vertClassType	SCIMS vertical class	<ul style="list-style-type: none"> <li>▪ L2A</li> <li>▪ LA</li> <li>▪ LB</li> <li>▪ LC</li> <li>▪ LD</li> <li>▪ LE</li> <li>▪ 2A</li> <li>▪ A</li> <li>▪ B</li> <li>▪ C</li> <li>▪ D</li> <li>▪ E</li> <li>▪ U</li> </ul>
order	vertOrderType	SCIMS vertical order	<ul style="list-style-type: none"> <li>▪ L0</li> <li>▪ L1</li> <li>▪ L2</li> <li>▪ L3</li> <li>▪ L4</li> <li>▪ L5</li> <li>▪ 0</li> <li>▪ 1</li> <li>▪ 2</li> <li>▪ 3</li> <li>▪ 4</li> <li>▪ 5</li> <li>▪ U</li> </ul>
Vertical Fix	vertFixType	This is a list of methods used for height datum validation	<ul style="list-style-type: none"> <li>▪ SCIMS Adopted</li> <li>▪ From SCIMS – Datum Validation</li> <li>▪ Null</li> </ul>

**END OF DOCUMENT**